

TAB

01TAB-60-VFA Væg 60 cm -
Fasteel - 800 m³/h

Sortiment

Design

EAN Kode

8034122352077

FUNKTIONER

Åbning i front i Fasteel
Krom hjørner
Elektronisk kontrolpanel
LED lys på emfang og som
baggrundslys
TOP Vaskbare rustfrie fedtfiltere
Kulfilter
Mulighed for bagudvendning af
motor
Skorsten medfølger ved aftræk

MULIGHEDER FOR TILVALG

01MO-GAVL

Gavlmotor til udendørs brug
1000 m³/h

01MO-GAVL-15

Gavlmotor til udendørs brug
1500 m³/h

01MO-LOFT

Loftmotorer under taget 950
m³/h

01MO-LOFT-13

Loftmotor 1300 m³ Ø200 mm

07MAGIC

Beskyttende renseklude til
rustfrit stål. Kasse med 10 klude

KACL.770#41F

Loftmotorer 1100 m³/h

Brushless

KCTCN.001#I

KIT CHIMNEY TAB 60-80 NOR.
STAINLESS STEEL

TEKNISK BESKRIVELSE

Installation

Væg

Dimensioner

60 cm

Materiale

Fasteel åbning på front

Krom hjørner

Motor

800 m³/h

Betjening

Elektronisk kontrolpanel

Hastighed

3 + boost

Belysning

LED 4x1,2 W - 3200 K

Filter

Metalfiltere - Top - Tab 60

Kulfilter

Rundt kulfilter Ø170 mm. Type 6
(Medfølger)

Minimumsafstand

Gaskomfur: 55 cm

Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt

20 kg

Nettovægt

17 kg

Volumen

0.2 m³

Mål på emballage

Længde

710 mm

Højde

480 mm

Dybde

595 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

280 W

Spænding

220-240V

Frekvens

50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet

750 m³/h

I.E.C. 61591

Maksimalt støjniveau

66 dB(A)_{re1pW}

I.E.C.60704-2-13

Maksimalt tryk (Pa)



510 Pa

Maksimal sugestyrke

224 W

ENERGIKLASSE

A



TAB

01TAB-60-VFA Væg 60 cm -
Fasteel - 800 m³/h

Sortiment

Design


EAN Kode

8034122352077

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	46	53	58	66
Kapacitet (m ³ /h) I.E.C.61591	295	390	500	750
Maksimalt tryk (Pa)	390	440	490	510
Forbrug (W)	130	150	178	224
Luftudtag	150	150	150	150

KAPACITET / TRYK

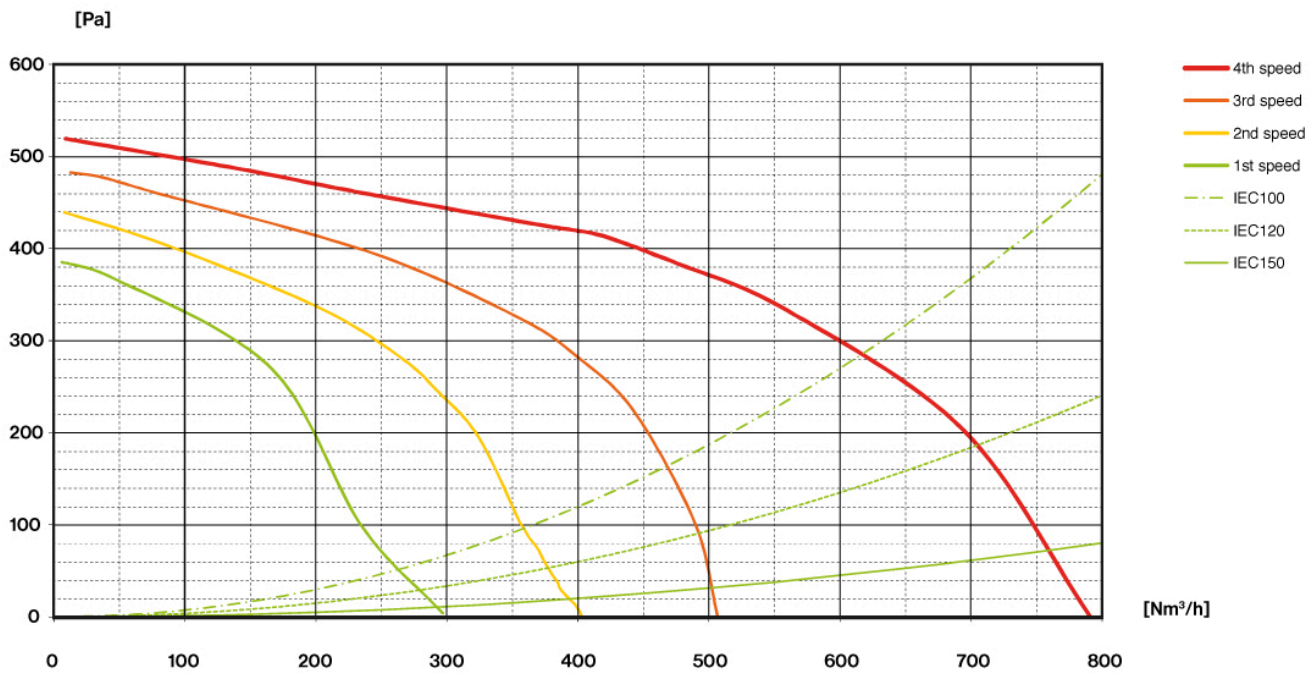

TAB


01TAB-60-VFA Væg 60 cm -
Fasteel - 800 m³/h

Sortiment

Design

EAN Kode

8034122352077

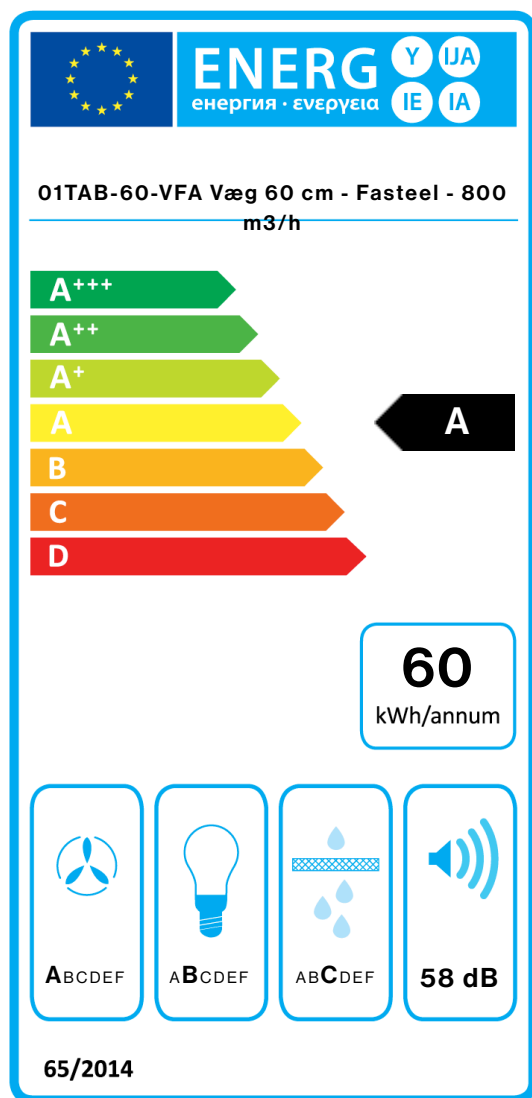

PF		
S	Falmec Spa	
M	01TAB-60-VFA Væg 60 cm - Fasteel - 800 m ³ /h	
AEC	60,2	kWh/a
EEC	A	
FDE	29,8	
FDEC	A	
LE	24,9	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	295,0	m ³ /h
Qmax	500,0	m ³ /h
Qboost	750,0	m ³ /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0,9	
EEl	54,6	
Qbep	432,0	m ³ /h
Pbep	407	Pa
Qboost	750,0	m ³ /h
Wbep	164,0	W
WL	8,60	W
Emiddle	214	lux
Lwa-SPEmax	58	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.