

VELA NRS

Version

Island 100 cm - White - 800 m3/h

Collection

Silence - NRS

EAN code

8034122345932



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- NRS technology for a quieter kitchen
- Perimeter suction
- Touch control + 24 h function
- LED lighting
- Metallic grease filter, removable and washable
- Optional charcoal filter

OPTIONAL ACCESSORIES

KACL.400

Silent / Conveyer NRS

101078900

High performance filter

TECHNICAL FEATURES

- Installation type
 - Island
- Dimensions
 - 100 cm
- Finishing
 - Upper body: white finishing
 - Lower body: white tempered glass finishing
- Motor
 - 800 m³/h
- Type of control
 - Touch control
- Speed settings
 - 4
- Lighting
 - Led stripe 48 W (5500 K)
- Filter
 - Metallic filter "Base" - 274x274 mm
- Charcoal filter
 - High performance filter (optional)
- Minimum distance
 - Gas hob: 60 cm
 - Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight
 - 54 kg
- Net weight
 - 47 kg
- Volumes
 - 0.68 m³
- Packaging size
 - Length
 - 1070 mm
 - Height
 - 730 mm
 - Depth
 - 870 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption
 - 280 W
- Voltage
 - 220-240V
- Frequency
 - 50-60Hz
- Plug type
 - Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity
 - 590 m³/h
- I.E.C. 61591
- Maximum noise level
 - 59 dB(A)re1pW
- I.E.C.60704-2-13
- Maximum pressure (Pa)
 - 510 Pa
- Max. motor power
 - 224 W
- ENERGY CLASS
 - C



VELA NRS

Version

Island 100 cm - White - 800
m3/h

Collection

Silence - NRS

EAN code

8034122345932

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	38	45	52	59
Capacity (m3/h) I.E.C.61591	200	270	350	590
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150


VELA NRS

Version
Island 100 cm - White - 800 m3/h

Collection
Silence - NRS

EAN code
8034122345932

ENERGY LABEL

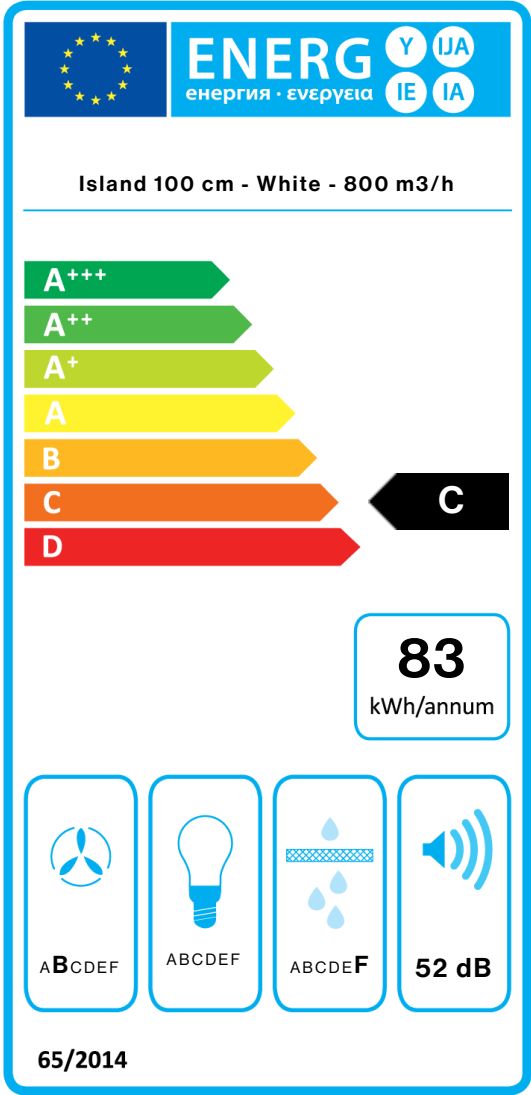

PF		
S	Falmec Spa	
M	Island 100 cm - White - 800 m3/h	
AEC	82,9	kWh/a
EEC	C	
FDE	26,7	
FDEC	B	
LE	3,4	
LEC	G	
GFE	53,0	
GFEC	F	
Qmin	200,0	m³/h
Qmax	350,0	m³/h
Qboost	590,0	m³/h
SPEmin	38	dBa
SPEmax	52	dBa
SPEboost	59	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	73,2	
Qbep	327,0	m³/h
Pbep	379	Pa
Qboost	590,0	m³/h
Wbep	129,0	W
WL	49,00	W
Emiddle	168	lex
Lwa-SPEmax	52	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.