

GRUPPO

01GRU-105 - Indbygning - 105 cm - 800 m³/h

Sortiment

Design

EAN Kode

8034122353371



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Rustfrit stål (AISI 304) scotch brite
Kantsug
Elektronisk kontrolpanel
Vaskbare rustfrie fedtfiltere
Kulfilter
Tilvalg fjernbetjening
Dæmpbart LED-lys
Dynamic LED Light (2700K - 5600K)

Dimmable led lighting from 07.21.23

MULIGHEDER FOR TILVALG

01-FJERN

Fjernbetjening med display

01MO-GAVL

Gavlmotor til udendørs brug 1000 m³/h

01MO-GAVL-15

Gavlmotor til udendørs brug 1500 m³/h

01MO-LOFT

Loftmotorer under taget 950 m³/h

01MO-LOFT-13

Loftmotor 1300 m³ Ø200 mm

07MAGIC

Beskyttende renseklude til rustfrit stål. Kasse med 10 klude

KACL.770#41F

Loftmotorer 1100 m³/h
Brushless

TEKNISK BESKRIVELSE

Installation

Integreret emhætte

Dimensioner

105 cm

Materiale

Scotch brite rustfrit stål (AISI 304)

Motor

800 m³/h

Betjening

Elektronisk kontrolpanel

Hastighed

3 + boost

Belysning

Led 4x1,2 W - 2700 K / 5600 K

Filter

4 x Metallfiltere - Base - 204x207 mm

Kulfilter

Rundt kulfilter Ø170 mm. Type 6 (Medfølger)

Minimumsafstand

Gaskomfur: 62 cm

Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt

18 kg

Nettovægt

15 kg

Volumen

0,16 m³

Mål på emballage

Længde

1185 mm

Højde

345 mm

Dybde

385 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

280 W

Spænding

220-240V

Frekvens

50-60Hz

Shuko

DATA BLAD MOTOR

Maksimal kapacitet

670 m³/h

I.E.C. 61591

Maksimalt støjniveau

67 dB(A)re1pW

I.E.C.60704-2-13

Maksimalt tryk (Pa)


500 Pa

Maksimal sugestyrke

215 W

ENERGIKLASSE

B



Udskæringsmål: 1029 x 262 mm

GRUPPO

01GRU-105 - Indbygning - 105
cm - 800 m³/h

Sortiment

Design


EAN Kode

8034122353371

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	49	55	61	67
Kapacitet (m ³ /h) I.E.C.61591	270	360	470	670
Maksimalt tryk (Pa)	390	420	460	500
Forbrug (W)	134	156	180	215
Luftudtag	150	150	150	150

KAPACITET / TRYK

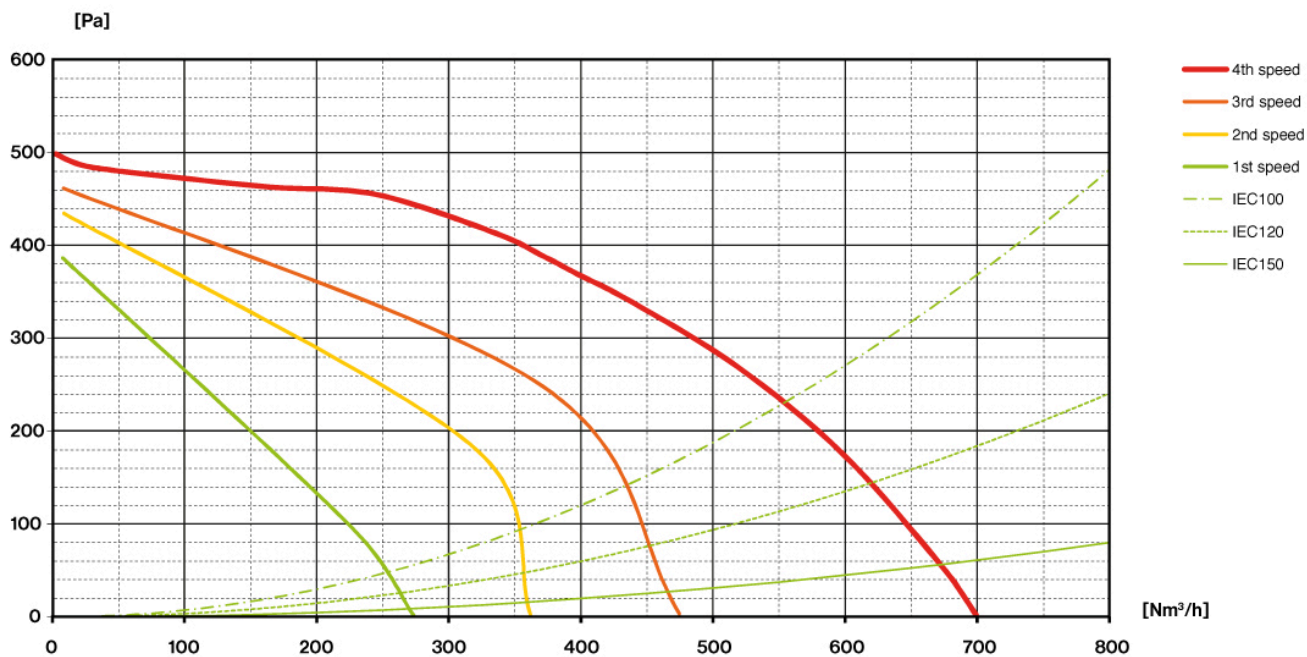

GRUPPO


01GRU-105 - Indbygning - 105
cm - 800 m3/h

Sortiment

Design

EAN Kode

8034122353371

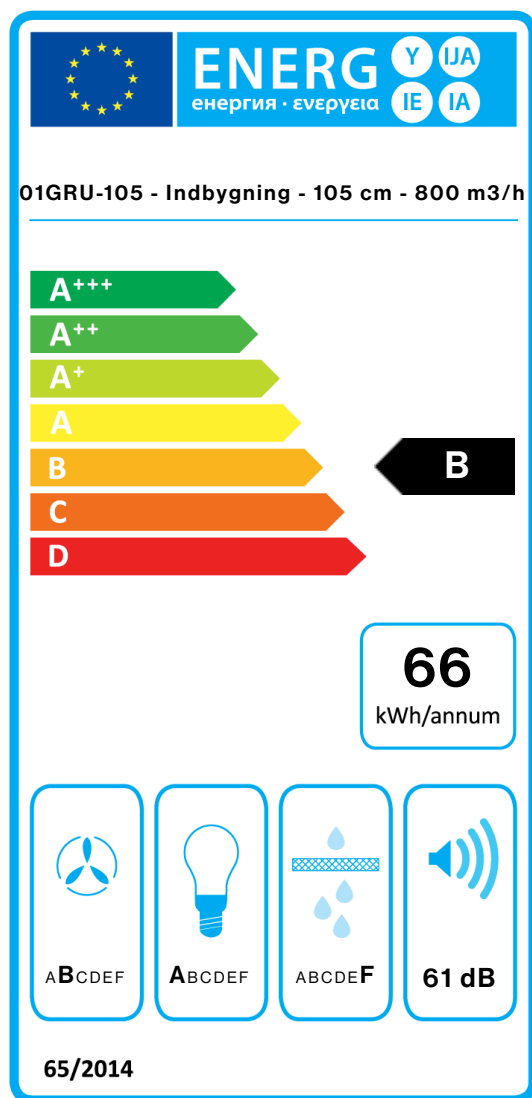

PF		
S	Falmec Spa	
M	01GRU-105 - Indbygning - 105 cm - 800 m3/h	
AEC	65,6	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	31,4	
LEC	A	
GFE	53,0	
GFEC	F	
Qmin	270,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	670,0	m ³ /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEI	64,8	
Qbep	333,0	m ³ /h
Pbep	407	Pa
Qboost	670,0	m ³ /h
Wbep	147,7	W
WL	8,60	W
Emiddle	270	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.