

GRUPPO

01GRU-105 - Indbygning - 105
cm - 800 m³/h

Sortiment

Design

EAN Kode

8034122353371

FUNKTIONER

Rustfrit stål (AISI 304) scotch
brite

Kantsug

Elektronisk kontrolpanel

Vaskbare rustfrie fedtfiltere

Kulfilter

Tilvalg fjernbetjening

Dæmpbart LED-lys

Dynamic LED Light (2700K -
5600K)

Dimmable led lighting from

07.21.23

MULIGHEDER FOR TILVALG

01-FJERN

Fjernbetjening med display

01MO-GAVL

Gavlmotor til udendørs brug

1000 m³/h

01MO-GAVL-15

Gavlmotor til udendørs brug

1500 m³/h

01MO-LOFT

Loftmotorer under taget 950

m³/h

01MO-LOFT-13

Loftmotor 1300 m³ Ø200 mm

07MAGIC

Beskyttende rensklude til
rustfrit stål. Kasse med 10 klude

KACL.770#41F

Loftmotorer 1100 m³/h

Brushless

TEKNISK BESKRIVELSE

Installation

Integreret emhætte

Dimensioner

105 cm

Materiale

Scotch brite rustfrit stål (AISI
304)

Motor

800 m³/h

Betjening

Elektronisk kontrolpanel

Hastighed

3 + boost

Belysning

Led 4x1,2 W - 2700 K / 5600 K

Filter

4 x Metallfiltere - Base - 204x207
mm

Kulfilter

Rundt kulfilter Ø170 mm. Type 6
(Medfølger)

Minimumsafstand

Gaskomfur: 62 cm

Kogeplade: 52 cm



Fotografiet er udelukkende informativt

Korresponderer ikke nødvendigvis tmed den valgte model

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt

18 kg

Nettovægt

15 kg

Volumen

0,16 m³

Mål på emballage

Længde

1185 mm

Højde

345 mm

Dybde

385 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

280 W

Spænding

220-240V

Frekvens

50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet

670 m³/h

I.E.C. 61591

Maksimalt støjniveau

67 dB(A)re1pW

I.E.C.60704-2-13

Maksimalt tryk (Pa)


500 Pa

Maksimal sugestyrke

215 W

ENERGIKLASSE

B



Udskæringsmål: 1029 x 262 mm

GRUPPO

01GRU-105 - Indbygning - 105
cm - 800 m³/h

Sortiment

Design


EAN Kode

8034122353371

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	49	55	61	67
Kapacitet (m ³ /h) I.E.C.61591	270	360	470	670
Maksimalt tryk (Pa)	390	420	460	500
Forbrug (W)	134	156	180	215
Luftudtag	150	150	150	150

KAPACITET / TRYK

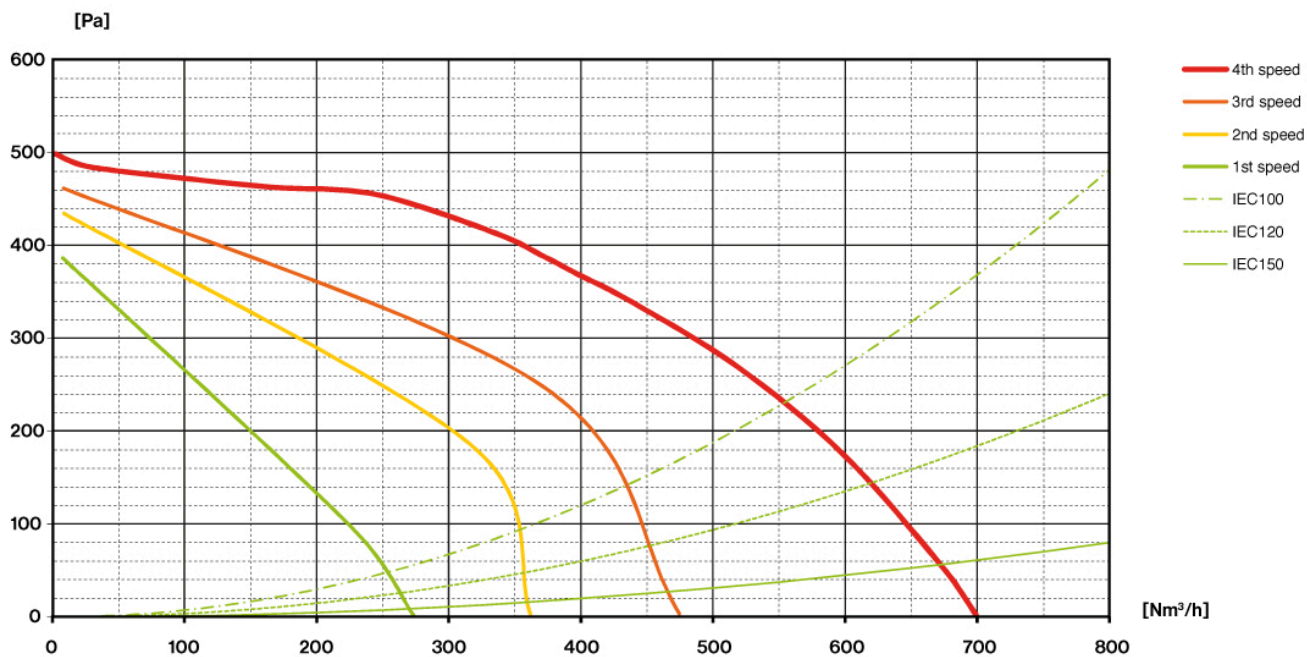

GRUPPO


01GRU-105 - Indbygning - 105
cm - 800 m3/h

Sortiment

Design

EAN Kode

8034122353371

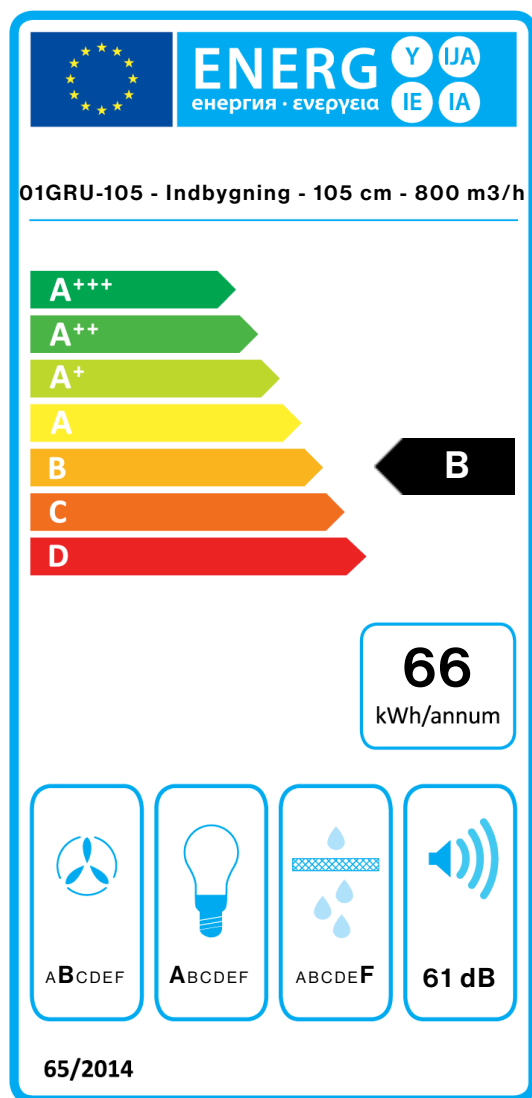

PF		
S	Falmec Spa	
M	01GRU-105 - Indbygning - 105 cm - 800 m3/h	
AEC	65,6	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	31,4	
LEC	A	
GFE	53,0	
GFEC	F	
Qmin	270,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	670,0	m ³ /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEI	64,8	
Qbep	333,0	m ³ /h
Pbep	407	Pa
Qboost	670,0	m ³ /h
Wbep	147,7	W
WL	8,60	W
Emiddle	270	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.