

GRUPPO

Gruppo Select50 stål.

Sortiment

Design

EAN Kode

8034122353388



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Rustfrit stål (AISI 304) scotch brite
Kantsug
Elektronisk kontrolpanel
Vaskbare rustfrie fedtfilter
Kulfilter
Tilvalg fjernbetjening
Dæmpbart LED-lys
Dynamic LED Light (2700K - 5600K)

Charcoal filter type 6 code 103050091 from 11.15.21.
Charcoal filter type 2 code 103050102 until 11.15.21.
Dimmable led lighting since 05.03.23

MULIGHEDER FOR TILVALG

01-FJERN

Fjernbetjening med display

01KU-2


Rundt kulfilter Ø212 mm. Type 2

01KU-6

Rundt kulfilter Ø170 mm. Type 6

07MAGIC

Beskyttende renseklude til rustfrit stål. Kasse med 10 klude



TEKNISK BESKRIVELSE

Installation

Integreret emhætte

Dimensioner

50 cm

Materiale

Scotch brite rustfrit stål (AISI 304)

Motor

600 m³/h

Betjening

Elektronisk kontrolpanel

Hastighed

3

Belysning

Led 2x1,2 W - 2700 K / 5600 K

Filter

2 x Metallfilter - Base - 204x207 mm

Minimumsafstand

Gaskomfur: 62 cm

Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt

10 kg

Nettovægt

7.6 kg

Volumen

0.09 m³

Mål på emballage

Længde

635 mm

Højde

380 mm

Dybde

390 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

230 W

Spænding

220-240V

Frekvens

50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet

480 m³/h

I.E.C. 61591

Maksimalt støjniveau

65 dB(A)re1pW

I.E.C.60704-2-13

Maksimalt tryk (Pa)

500 Pa

Maksimal sugestyrke

180 W

ENERGIKLASSE

C

GRUPPO

Gruppo Select50 stål.

Sortiment

Design


EAN Kode

8034122353388

DATABLAD MOTOR

Motorhastighed	1	2	3
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	49	58	65
Kapacitet (m ³ /h) I.E.C.61591	220	320	480
Maksimalt tryk (Pa)	270	400	500
Forbrug (W)	100	130	180
Luftudtag	120	120	120

KAPACITET / TRYK

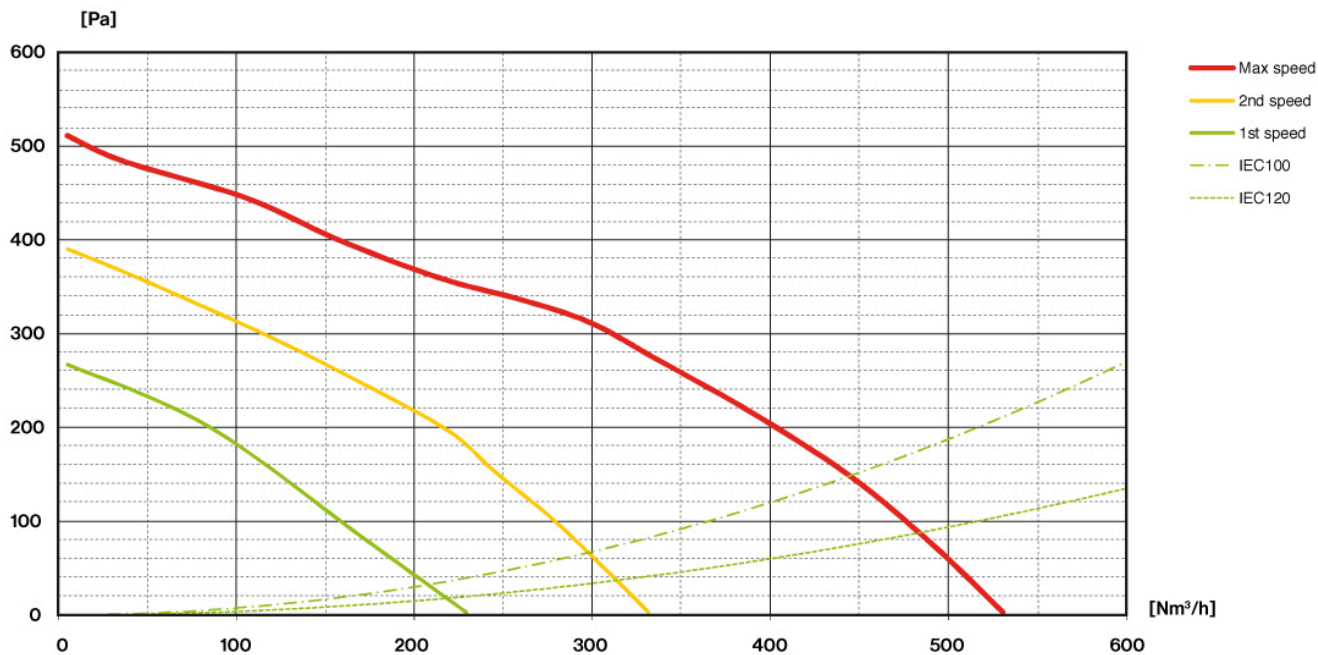

GRUPPO


Gruppo Select50 stål.

Sortiment

Design

EAN Kode

8034122353388

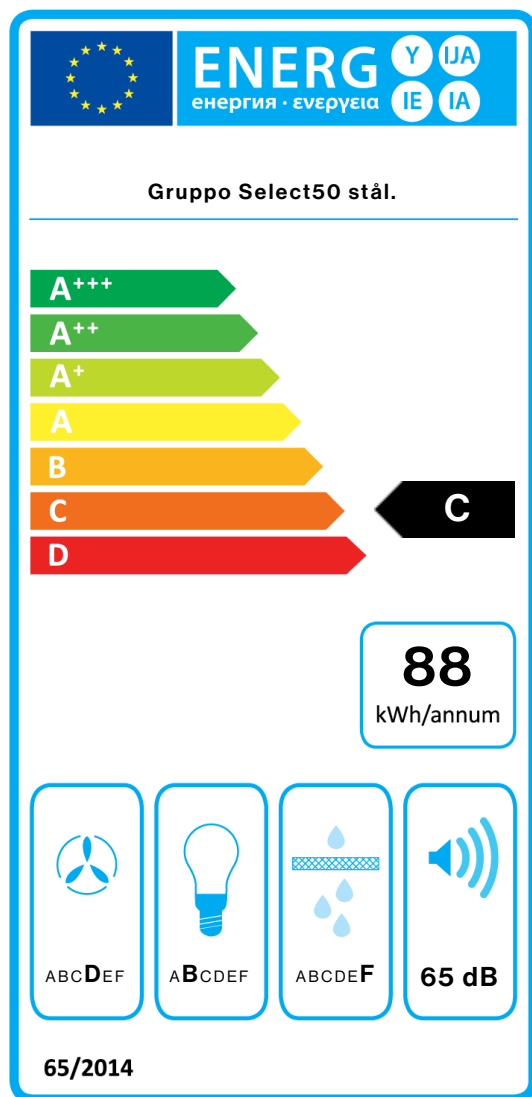

PF		
S	Falmec Spa	
M	Gruppo Select50 stål.	
AEC	87,7	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	20,5	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	220,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	480,0	m ³ /h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W
PI		
F	1.4	
EEl	80,9	
Qbep	303,0	m ³ /h
Pbep	308	Pa
Qboost	480,0	m ³ /h
Wbep	164,0	W
WL	5,30	W
Emiddle	109	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.