

## GRUPPO

01GRU-60 - Indbygning - 60 cm  
- 800 m<sup>3</sup>/h

## Sortiment

Design

## EAN Kode

8034122353395



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

Rustfrit stål (AISI 304) scotch brite

Kantsug

Elektronisk kontrolpanel

Vaskbare rustfrie fedtfiltere

Kulfilter

Tilvalg fjernbetjening

Dynamic LED Light (2700K - 5600K)

## MULIGHEDER FOR TILVALG

### 01-FJERN

Fjernbetjening med display

### 01MO-GAVL

Gavlmotor til udendørs brug  
1000 m<sup>3</sup>/h

### 01MO-GAVL-15

Gavlmotor til udendørs brug  
1500 m<sup>3</sup>/h

### 01MO-LOFT

Loftmotorer under taget 950  
m<sup>3</sup>/h

### 01MO-LOFT-13

Loftmotor 1300 m<sup>3</sup> Ø200 mm

### 07MAGIC

Beskyttende rensklude til  
rustfrit stål. Kasse med 10 klude

### KACL.770#41F

Loftmotorer 1100 m<sup>3</sup>/h  
Brushless

## TEKNISK BESKRIVELSE

### Installation

Integreret emhætte

### Dimensioner

50 cm

### Materiale

Scotch brite rustfrit stål (AISI 304)

### Motor

800 m<sup>3</sup>/h

### Betjening

Elektronisk kontrolpanel

### Hastighed

3 + boost

### Belysning

Led 2x1,2 W - 2700 K / 5600 K

### Filter

2 x Metallfiltere - Base - 204x207 mm

### Kulfilter

Rundt kulfilter Ø170 mm. Type 6 (Medfølger)

### Minimumsafstand

Gaskomfur: 62 cm

Kogeplade: 52 cm

## EMBALLAGE: VÆGT OG VOLUMEN

### Bruttovægt

10 kg

### Nettovægt

7.6 kg

### Volumen

0.09 m<sup>3</sup>

### Mål på emballage

Længde

635 mm

Højde

380 mm

Dybde

390 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

### Maksimalt forbrug

280 W

### Spænding

220-240V

### Frekvens

50-60Hz

Shuko

## DATABLAD MOTOR

### Maksimal kapacitet

670 m<sup>3</sup>/h

I.E.C. 61591

### Maksimalt støjniveau

67 dB(A)re1pW

I.E.C.60704-2-13

### Maksimalt tryk (Pa)


500 Pa

### Maksimal sugestyrke

215 W

## ENERGIKLASSE

B



## GRUPPO

01GRU-60 - Indbygning - 60 cm  
- 800 m<sup>3</sup>/h

## Sortiment

Design


## EAN Kode

8034122353395

## DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	49	55	61	67
Kapacitet (m <sup>3</sup> /h) I.E.C.61591	270	360	470	670
Maksimalt tryk (Pa)	390	420	460	500
Forbrug (W)	134	156	180	215
Luftudtag	150	150	150	150

## KAPACITET / TRYK

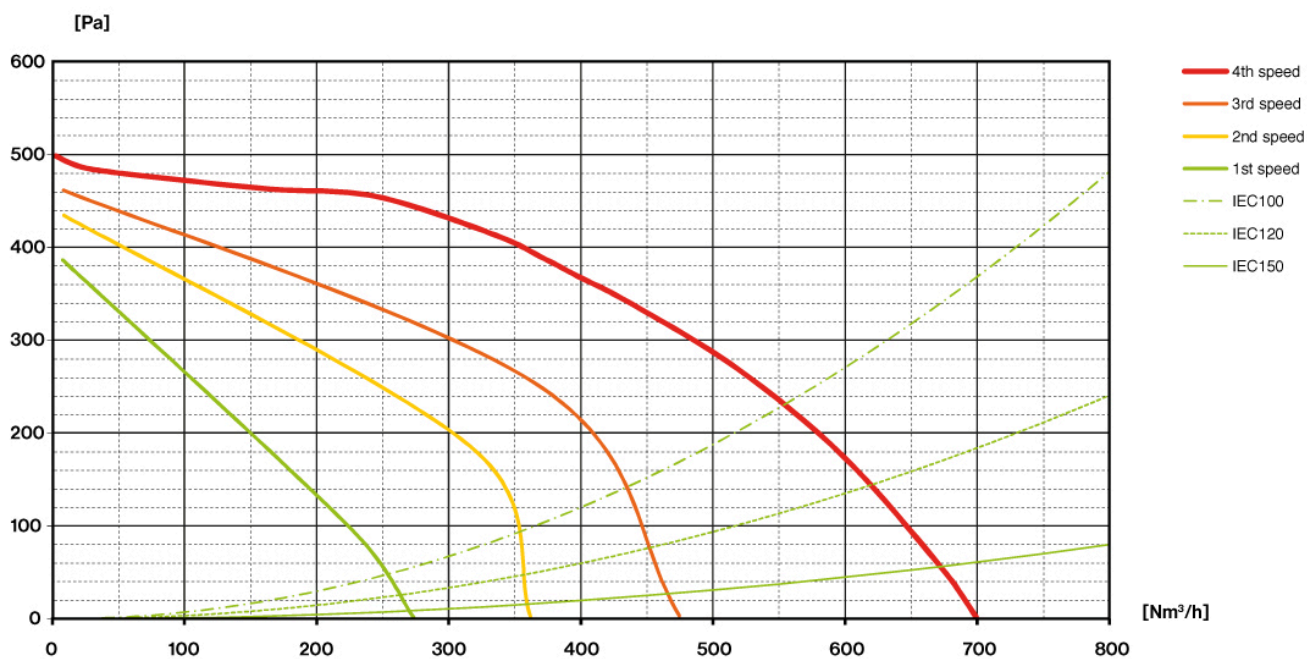

## GRUPPO


01GRU-60 - Indbygning - 60 cm  
- 800 m<sup>3</sup>/h

## Sortiment

Design

## EAN Kode

8034122353395

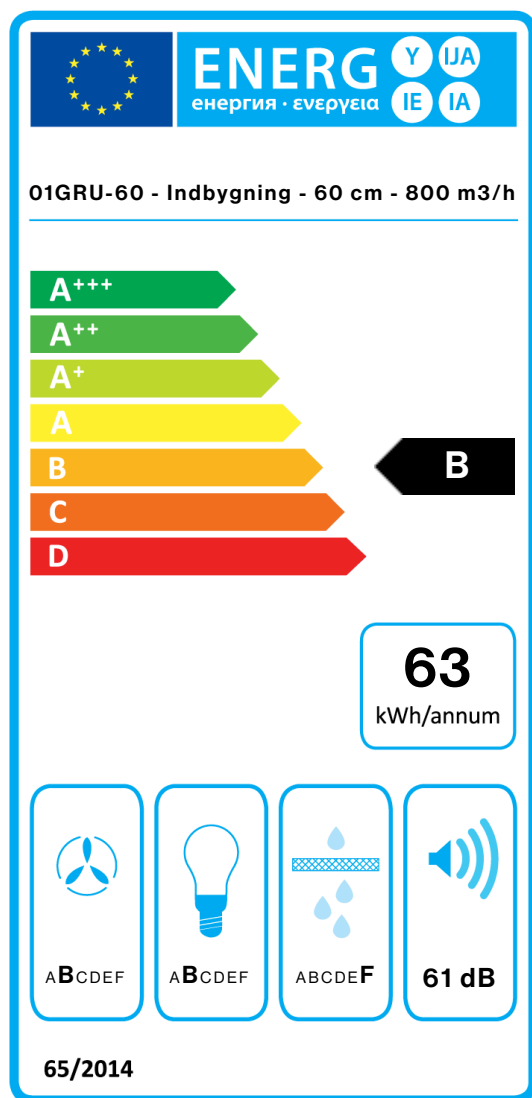

PF		
S	Falmec Spa	
M	01GRU-60 - Indbygning - 60 cm - 800 m <sup>3</sup> /h	
AEC	63,2	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	27,9	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	270,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	670,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEI	63,5	
Qbep	333,0	m <sup>3</sup> /h
Pbep	407	Pa
Qboost	670,0	m <sup>3</sup> /h
Wbep	147,7	W
WL	5,30	W
Emiddle	148	lux
Lwa-SPEmax	61	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.