

GRUPPO INCASSO

Version
Built-in 70 cm - 800 m3/h

Collection
DESIGNER SERIES - Design

EAN code
8034122353418



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Scotch brite stainless steel (AISI 304)
Perimeter suction
Electronic controls
Metallic grease filter, removable and washable
Charcoal filter included
Optional remote control
Dynamic LED Light (2700K - 5600K)

OPTIONAL ACCESSORIES

EW1300
Remote under-roof motor 1300 m3/h
EW1500
Outdoor extractor fan 1500 m3/h
IN950
Remote under-roof motor 950 m3/h
KACL.770#41F
Remote under-roof 1100 m3/h Brushless
KACL.786#41F
Outdoor extractor fan 1000 m3/h
KACL.815
Protective cleaning cloths for stainless steel (box 10 pcs)
105080053
Remote control

TECHNICAL FEATURES

Installation type
Built-in
Dimensions
70 cm
Finishing
Scotch brite stainless steel (AISI 304)
Motor
800 m³/h
Type of control
Electronic controls
Speed settings
4
Lighting
Led 2x1,2 W - 2700 K / 5600 K
Filter
3 x Metallic filter "Base" - 204x207 mm
Charcoal filter
Round charcoal filter Ø170 mm - Type 6 (included)
Minimum distance
Gas hob: 62 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


Gross weight
12 kg
Net weight
9.4 kg
Volumes
0.12 m³
Packaging size
Length 855 mm
Height 380 mm
Depth 375 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz
Plug type
Shuko

MOTOR TECHNICAL SHEET

Maximum capacity
670 m³/h
I.E.C. 61591
Maximum sound level
67 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
500 Pa
Maximum motor power
215 W
ENERGY CLASS
B



Cut-out size: 751 x 262 mm

GRUPPO INCASSO

Version
Built-in 70 cm - 800 m3/h


Collection
DESIGNER SERIES - Design

EAN code
8034122353418

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Sound level dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacity (m3/h) I.E.C.61591	270	360	470	670
Maximum pressure (Pa)	390	420	460	500
Motor Power (W)	134	156	180	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE

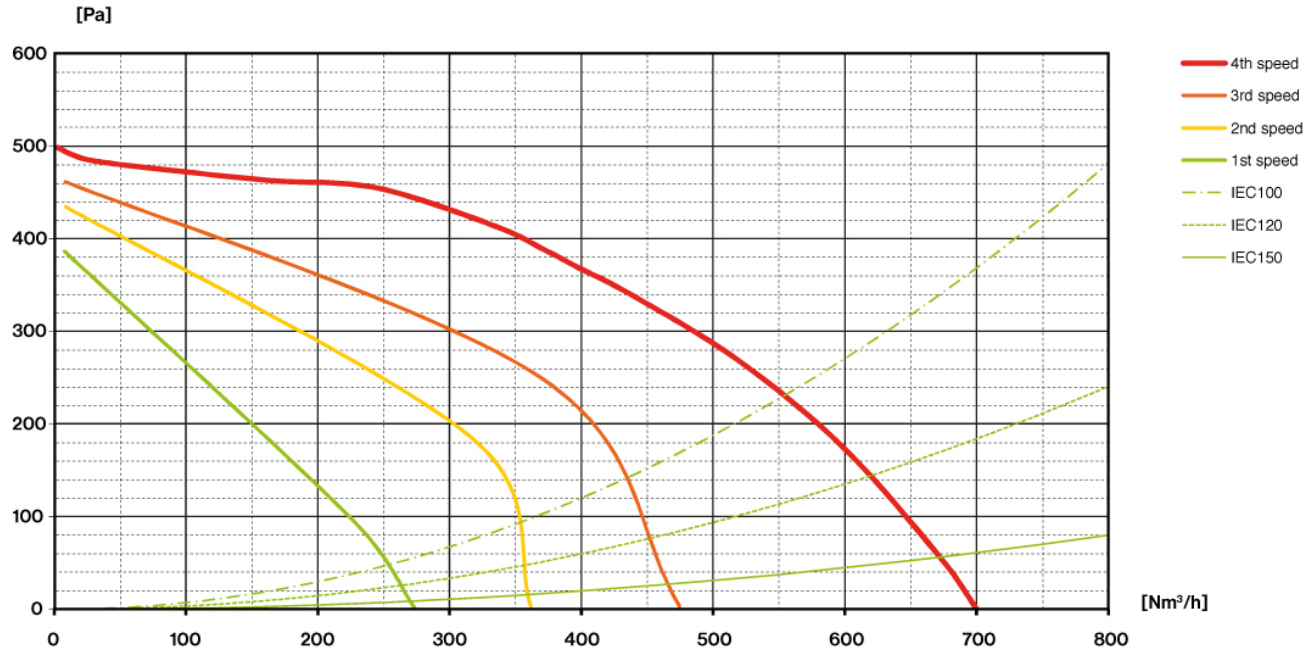


GRUPPO INCASSO

Version
Built-in 70 cm - 800 m3/h

Collection
DESIGNER SERIES - Design

EAN code
8034122353418

ENERGY LABEL

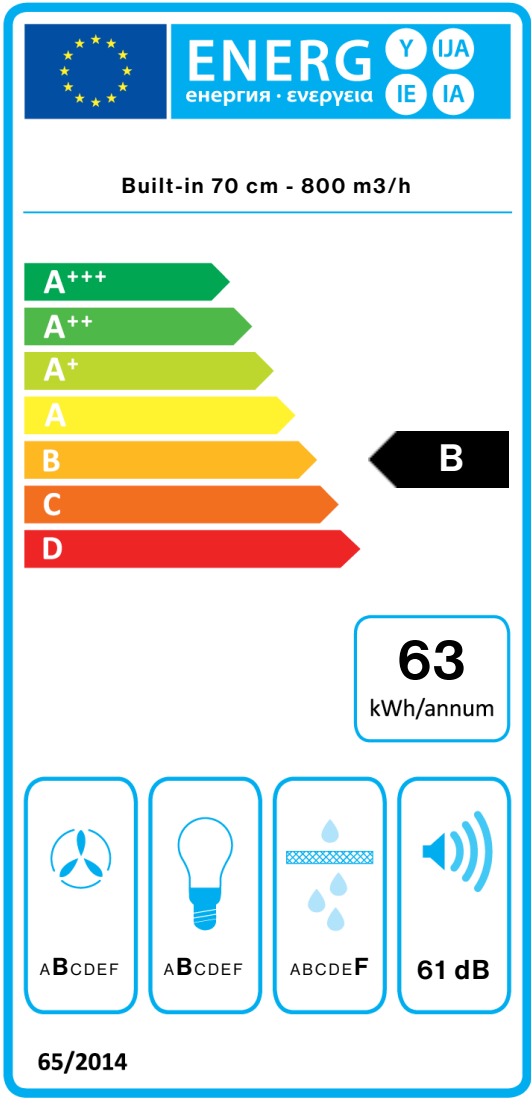

PF		
S	Falmec Spa	
M	Built-in 70 cm - 800 m3/h	
AEC	63,2	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	27,9	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	270,0	m³/h
Qmax	470,0	m³/h
Qboost	670,0	m³/h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEL	63,5	
Qbep	333,0	m³/h
Pbep	407	Pa
Qboost	670,0	m³/h
Wbep	147,7	W
WL	5,30	W
Emiddle	148	lex
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.