

GRUPPO INCASSO

Versiune

Incorporat 70 cm - 800 m³/h

Colectie

Design

Cod EAN

8034122353418



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Inox AISI 304 Scotch Brite
Aspiratie perimetrala
Control electronic
Filtru de grasime metalic, detasabil si lavabil
Filtru de carbon inclus
Telecomanda inclusa
Dynamic LED Light (2700K - 5600K)

ACCESORII OPTIONALE

KACL.770#41F
Motor de acoperis 1100 m³/h
Brushless
KACL.786#41F
Motor de exterior 1000 m³/h
KACL.796#4AF
Motor de exterior 1500 m³/h
KACL.797#4AF
Motor de acoperis 1300 m³/h
KACL.798#41F
Motor de acoperis 950 m³/h
KACL.815
Lavete pentru curatare inox (cutie 10 buc)
105080053
Telecomanda

CARACTERISTICI TEHNICE

Tip de instalare
Incorporata
Dimensiuni
70 cm
Finisaj
Inox Scotch Brite (AISI 304)
Motor
800 m³/h
Tipul panoului de control
Control electronic
Setari de viteza
4
Iluminare
Led 2x1,2 W - 2700 K / 5600 K
Filtru
3 x Filtru metalic "Base" - 204x207 mm
Filtru de Carbon
Filtru de carbon rotund Ø170 mm - Tip 6 (inclus)
Distanta minima
Plita cu gaz: 62 cm
Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM


Greutate bruta
12 kg
Greutate neta
9.4 kg
Volum
0.12 m³
Dimensiuni ambalaj
Lungime
855 mm
Inaltime
380 mm
Adancime
375 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim
280 W
Curent
220-240V
Frecventa
50-60Hz
Tip stecher
Shuko

FISA TEHNICA MOTOR

Capacitate maxima
670 m³/h
I.E.C. 61591
Nivel de zgomot maxim
67 dB(A)re1pW
I.E.C.60704-2-13
Presiune maxima (Pa)
500 Pa
Putere maxima motor
215 W
CLASA DE ENERGIE
B



Cut-out size: 751 x 262 mm

GRUPPO INCASSO

Versiune

Incorporat 70 cm - 800 m³/h

Colectie

Design

Cod EAN

8034122353418

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacitate (m ³ /h) I.E.C.61591	270	360	470	670
Presiune maxima (Pa)	390	420	460	500
Putere motor (W)	134	156	180	215
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE



GRUPPO INCASSO

Versiune

Incorporat 70 cm - 800 m3/h


Colectie

Design

Cod EAN

8034122353418

ETICHETA DE ENERGIE

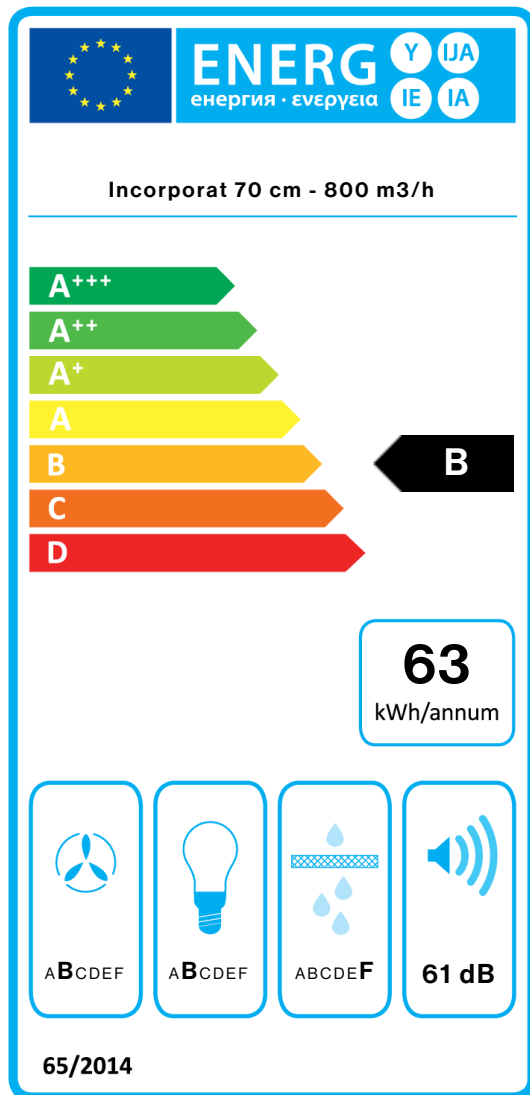

PF		
S	Falmec Spa	
M	Incorporat 70 cm - 800 m3/h	
AEC	63,2	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	27,9	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	270,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	670,0	m ³ /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEI	63,5	
Qbep	333,0	m ³ /h
Pbep	407	Pa
Qboost	670,0	m ³ /h
Wbep	147,7	W
WL	5,30	W
Emiddle	148	lex
Lwa-SPEmax	61	dBa