

FLIPPER NRS

Væg - 85 cm - Hvid mat
glasfront - 800 m³/h

Sortiment

Silence - NRS

EAN Kode

8034122355115



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

NRS teknologi for et roligere køkken

Elektronisk kontrolpanel

LED lys

Vaskbare rustfrie fedtfilter

Tilvalg kulfilter

Dæmpbart LED-lys

Dynamic LED Light (2700K - 5600K)

From 04.11.2024 the dynamic and dimmable light is included.

MULIGHEDER FOR TILVALG

101078897

High performance filter

KACL.400

Silent / Conveyor NRS

KACL.570#I

Forlænger H700 væg

KACL.571#B

Extension H960 - Wall - white

KACL.571#I

Forlænger H960 væg

TEKNISK BESKRIVELSE

Installation

Væg

Dimensioner

85 cm

Materiale

Hvidt glas, satin finish

Motor

800 m³/h

Betjening

Elektronisk kontrolpanel

Hastighed

3 + boost

Belysning

Led 2x1,2 W - 2700 K / 5600 K

Filter

2 x Metallfilter - Base - 284x234 mm

Kulfilter

High performance filter (Tilvalg)

Minimumsafstand

Gaskomfur: 52 cm

Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt

43.4 kg

Nettovægt

36 kg

Volumen

0.5 m³

Mål på emballage

Længde

1030 mm

Højde

495 mm

Dybde

975 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

280 W

Spænding

220-240V

Frekvens

50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet

610 m³/h

I.E.C. 61591

Maksimalt støjniveau

54,5 dB(A)re1pW

I.E.C.60704-2-13

Maksimalt tryk (Pa)


510 Pa

Maksimal sugestyrke

224 W

ENERGIKLASSE

B



FLIPPER NRS

Væg - 85 cm - Hvid mat
glasfront - 800 m3/h

Sortiment

Silence - NRS


EAN Kode

8034122355115

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	37	41	46	54,5
Kapacitet (m3/h) I.E.C.61591	220	290	375	610
Maksimalt tryk (Pa)	390	440	490	510
Forbrug (W)	130	150	178	224
Luftudtag	150	150	150	150

KAPACITET / TRYK

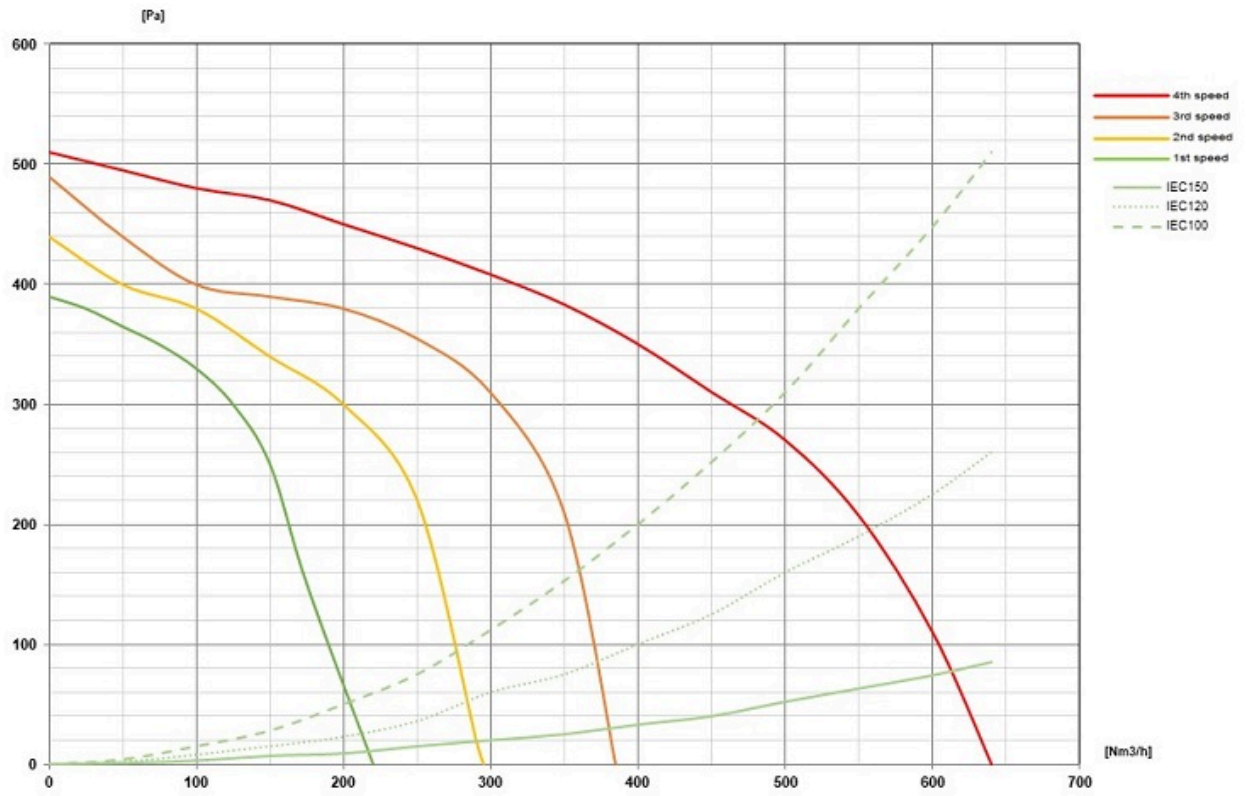

FLIPPER NRS


Væg - 85 cm - Hvid mat
glasfront - 800 m3/h

Sortiment

Silence - NRS

EAN Kode

8034122355115

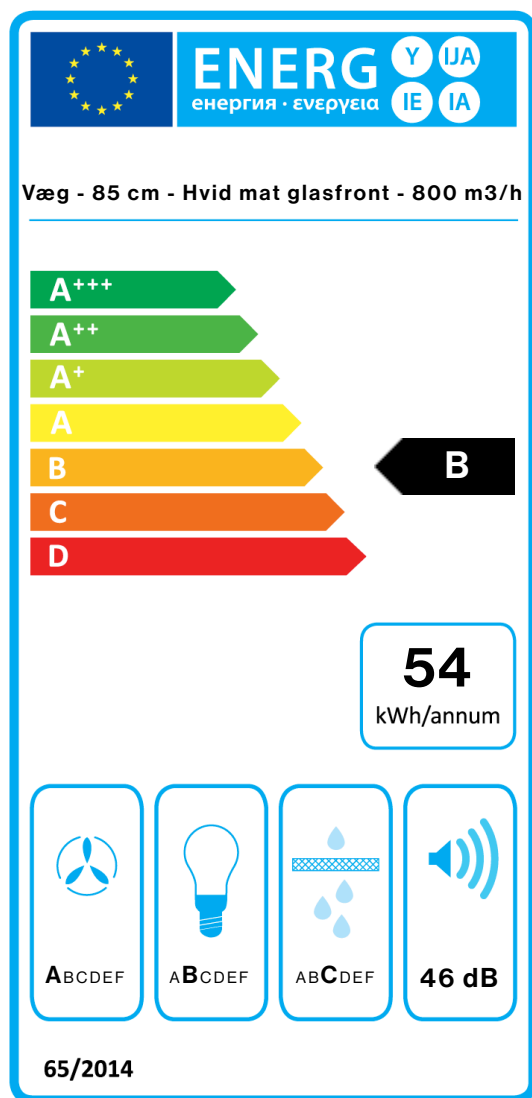

PF		
S	Falmec Spa	
M	Væg - 85 cm - Hvid mat glasfront - 800 m3/h	
AEC	53,9	kWh/a
EEC	B	
FDE	28,3	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	220,0	m ³ /h
Qmax	375,0	m ³ /h
Qboost	610,0	m ³ /h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	57,6	
Qbep	356,0	m ³ /h
Pbep	392	Pa
Qboost	610,0	m ³ /h
Wbep	137,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.