

FLIPPER NRS

Version
Wall - 85 cm - Black - 800 m3/h

Designer

Collection
Silence - NRS

EAN code
8034122353739



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

- NRS technology for a quieter kitchen
- Electronic control
- LED lighting
- Metallic grease filter, removable and washable
- Charcoal filter (optional)
- Dimmable lighting
- Dynamic Light (2700K - 5600K)

From 04.11.2024 the dynamic and dimmable light is included.

OPTIONAL ACCESSORIES

- 101078897
High performance filter
- KACL.400
Silent / Conveyor NRS
- KACL.570#I
Extension H700 Wall - Inox
- KACL.571#I
Extension H960 Wall - Inox
- KACL.571#N
Extension H960 Wall - Black

TECHNICAL FEATURES

- Installation type
Wall
- Dimensions
85 cm
- Finishing
Black glass satin finishing
- Motor
800 m³/h
- Type of control
Electronic control
- Speed
3 + boost
- Lighting
Led 2x1,2 W - 2700 K / 5600 K
- Filter
2 x Metallic filter "Base" - 284x234 mm
- Charcoal filter
High performance filter (optional)
- Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight
43.4 kg
- Net weight
36 kg
- Volumes
0.5 m³
- Packaging size
Length
1030 mm
Height
495 mm
Depth
975 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption
280 W
- Voltage
220-240V
- Frequency
50-60Hz
- Plug type
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity
610 m³/h
I.E.C. 61591
- Maximum noise level
54,5 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)
510 Pa
- Max. motor power
224 W
- ENERGY CLASS
B



FLIPPER NRS

Version

Wall - 85 cm - Black - 800 m3/h

Designer

Collection

Silence - NRS


EAN code

8034122353739

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	37	41	46	54,5
Capacity (m3/h) I.E.C.61591	220	290	375	610
Maximum pressure (Pa)	390	440	490	510
Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

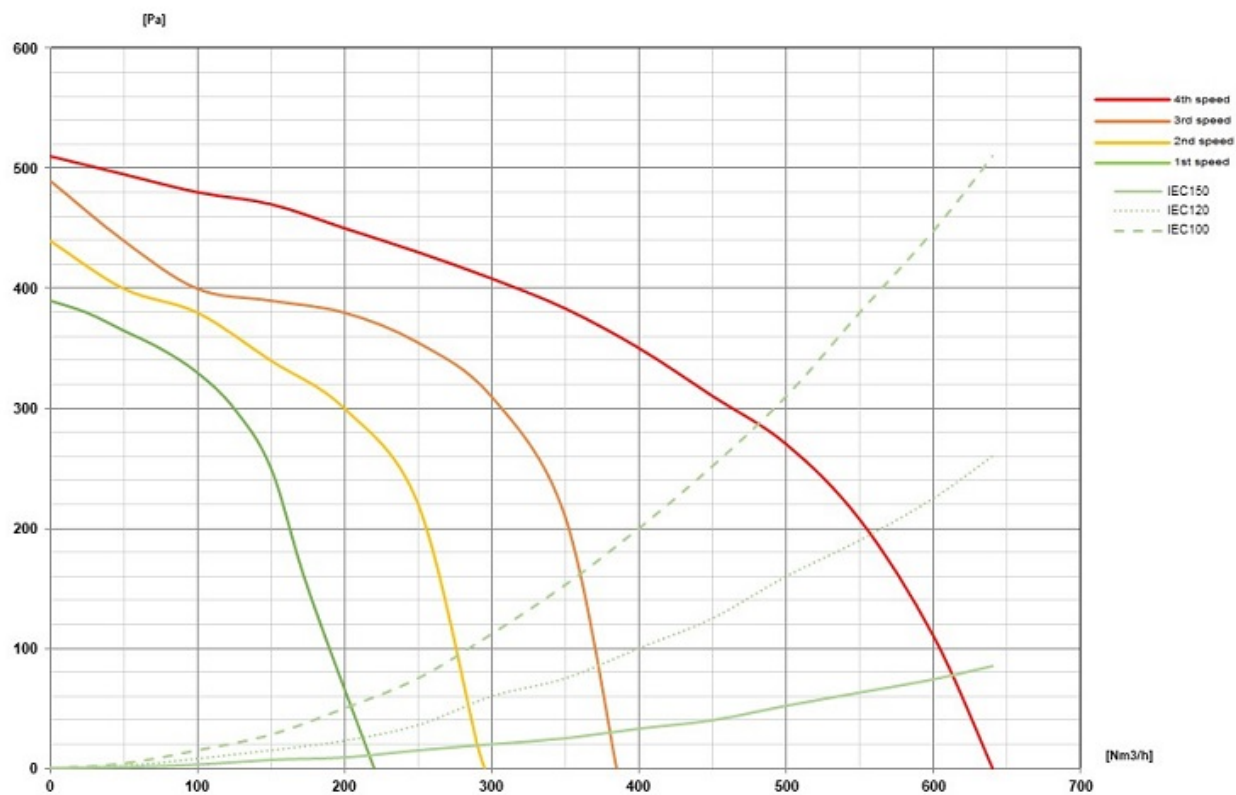

FLIPPER NRS


Version
Wall - 85 cm - Black - 800 m3/h

Designer

Collection
Silence - NRS

EAN code
8034122353739

ENERGY LABEL

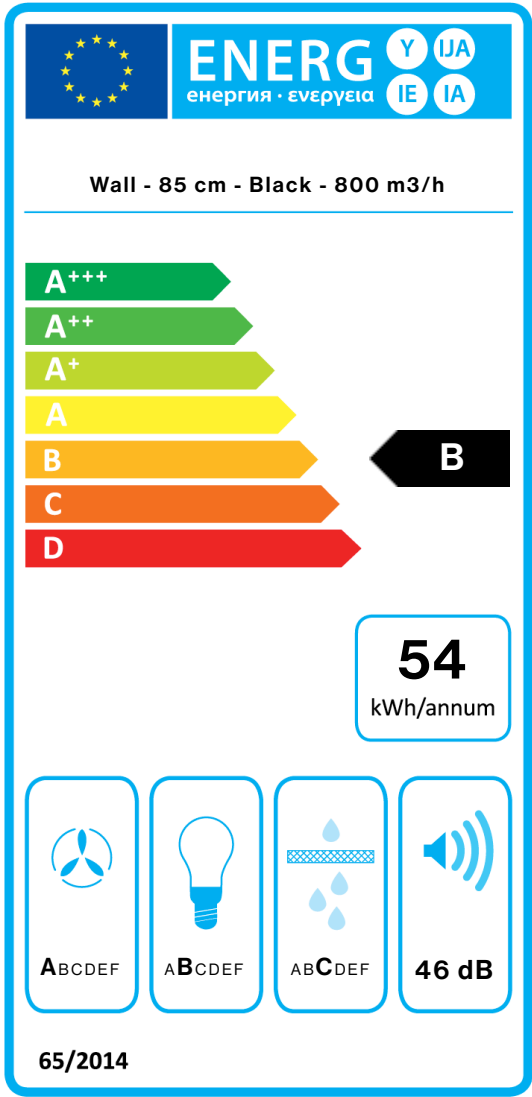

PF		
S	Falmec Spa	
M	Wall - 85 cm - Black - 800 m3/h	
AEC	53,9	kWh/a
EEC	B	
FDE	28,3	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	220,0	m³/h
Qmax	375,0	m³/h
Qboost	610,0	m³/h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	57,6	
Qbep	356,0	m³/h
Pbep	392	Pa
Qboost	610,0	m³/h
Wbep	137,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.