

FLIPPER NRS

Seinä 85 cm, musta satiini, 800 m³/h

Silence - NRS

8034122353739



*The photograph is purely for information
It may not correspond to the selected version.*

OMINAISUUDET

NRS teknologia äänettömään keittiöön

Elektroniset kytkimet

LED-valaistus

Metalliset rasvasuodattimet, irroitettavat ja pestävät

Aktiivihiihisiuodatin

lisävarusteena

Himmennettävä LED valaistus

Säädettävä LED valosävy (2700 - 5600 K)

From 04.11.2024 the dynamic and dimmable light is included.

OPTIONAL ACCESSORIES

101078897

High performance filter

KACL.400

Äänenvaimennin/Ilmanohjain

KACL.570#I

Extension H700 Wall - Inox

KACL.571#I

Extension H960 Wall - Inox

KACL.571#N

Extension - H960 - Wall - Black

TECHNICAL FEATURES

Installation type

Seinä

Dimensions

85 cm

Viimeistelystä

Musta lasi satiinpinta

Motor

800 m³/h

Type of control

Elektroniset kytkimet

Speed settings

3 + boost

Lighting

Led 2x1,2 W - 3200 K

Filter

2 x Metallic filter "Base" - 284x234 mm

Charcoal filter

High performance filter ()

: 52 cm

: 52 cm

PACKAGING: WEIGHTS AND VOLUMES

43.4 kg

36 kg

0.5 m³

1030 mm

495 mm

975 mm

CONSUMPTION AND CONNECTION FEATURES

280 W

220-240V

50-60Hz

Shuko

MOTOR TECHNICAL SHEET

610 m³/h

I.E.C. 61591


54,5 dB(A)re1pW

I.E.C.60704-2-13

510 Pa

224 W

B



FLIPPER NRS


Seinä 85 cm, musta satiini, 800
m³/h

Silence - NRS

8034122353739

MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
	37	41	46	54,5
dB(A)re1pW-I.E.C.60704-2-13				
(m³/h)	220	290	375	610
I.E.C.61591				
	390	440	490	510
	130	150	178	224
	150	150	150	150

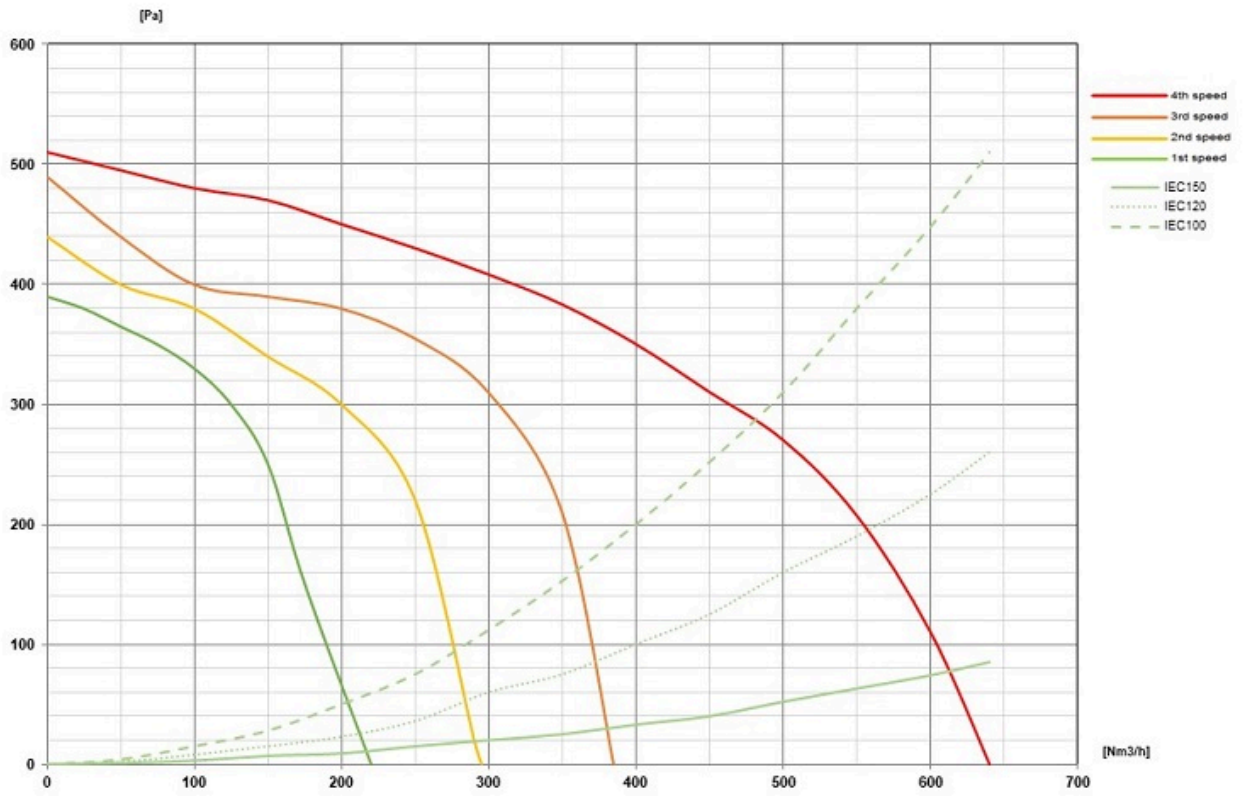


FLIPPER NRS

Seinä 85 cm, musta satiini, 800 m³/h

Silence - NRS

8034122353739

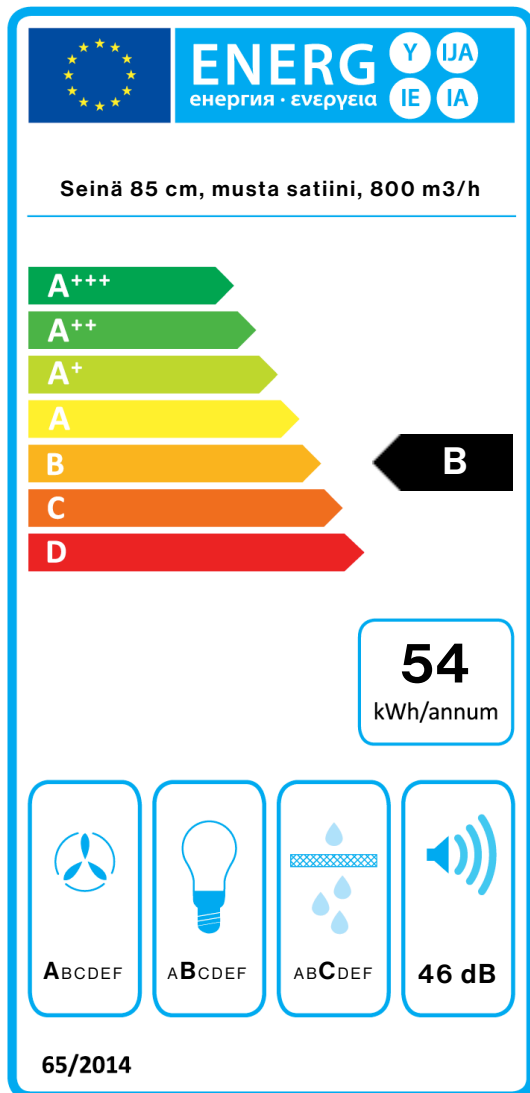

PF		
S	Falmec Spa	
M	Seinä 85 cm, musta satiini, 800 m ³ /h	
AEC	53,9	kWh/a
EEC	B	
FDE	28,3	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	220,0	m ³ /h
Qmax	375,0	m ³ /h
Qboost	610,0	m ³ /h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	57,6	
Qbep	356,0	m ³ /h
Pbep	392	Pa
Qboost	610,0	m ³ /h
Wbep	137,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.