

FLIPPER NRS

Versiune

Perete 85 cm - Negru - 800 m³/h

Colectie

Nivel de zgomot redus - NRS

Cod EAN

8034122353739



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Tehnologie NRS pentru liniste in bucatarie

Control electronic

Iluminare cu LED

Filtru de grasime metalic, detasabil si lavabil

Optional - filtru de carbon

Dimmable led lighting

Dynamic LED Light (2700K - 5600K)

From 04.11.2024 the dynamic and dimmable light is included.

ACCESORII OPTIONALE

101078897

Filtru de inalta performanta

KACL.400

Silentios / Conveier NRS

KACL.570#I

Extensie H700 - Perete

KACL.571#I

Extension H960 Wall - Inox

KACL.571#N

Extension - H960 - Wall - Black

CARACTERISTICI TEHNICE

Tip de instalare

De perete

Dimensiuni

85 cm

Finisaj

Sticla satinata cu finisaj negru

Motor

800 m³/h

Tipul panoului de control

Control electronic

Setari de viteza

3 + boost

Iluminare

LED 2x1,2 W - 3200 K

Filtru

2 x Filtru metalic "Base" - 284x234 mm

Filtru de Carbon

Filtru de inalta performanta (optional)

Distanta minima

Plita cu gaz: 52 cm

Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

43.4 kg

Greutate neta

36 kg

Volum

0.5 m³

Dimensiuni ambalaj

Lungime

1030 mm

Inaltime

495 mm

Adancime

975 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

280 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

610 m³/h

I.E.C. 61591

Nivel de zgomot maxim

54,5 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)


510 Pa

Putere maxima motor

224 W

CLASA DE ENERGIE

B



FLIPPER NRS

Versiune

Perete 85 cm - Negru - 800
m3/h

Colectie

Nivel de zgomot redus - NRS


Cod EAN

8034122353739

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	37	41	46	54,5
Capacitate (m3/h) I.E.C.61591	220	290	375	610
Presiune maxima (Pa)	390	440	490	510
Putere (W)	130	150	178	224
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE

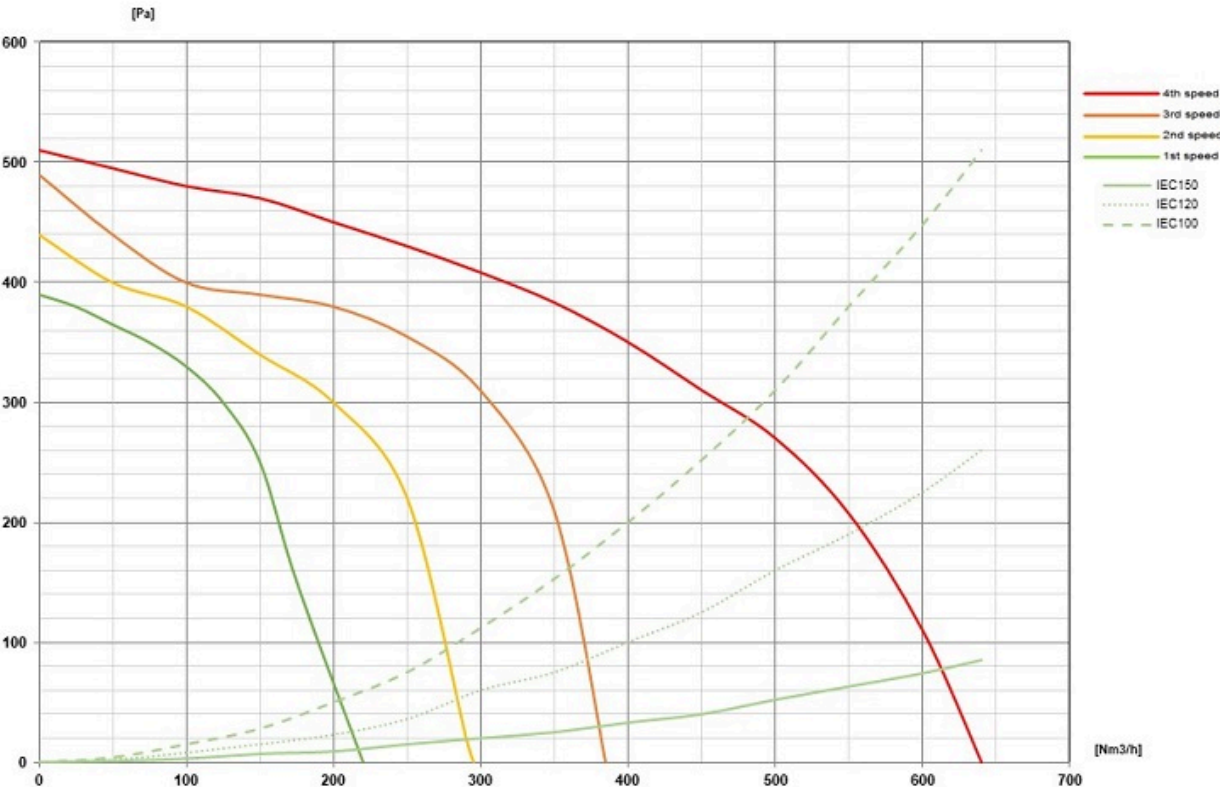

FLIPPER NRS

Versiune

Perete 85 cm - Negru - 800 m3/h


Colectie

Nivel de zgomot redus - NRS

Cod EAN

8034122353739

ETICHETA DE ENERGIE

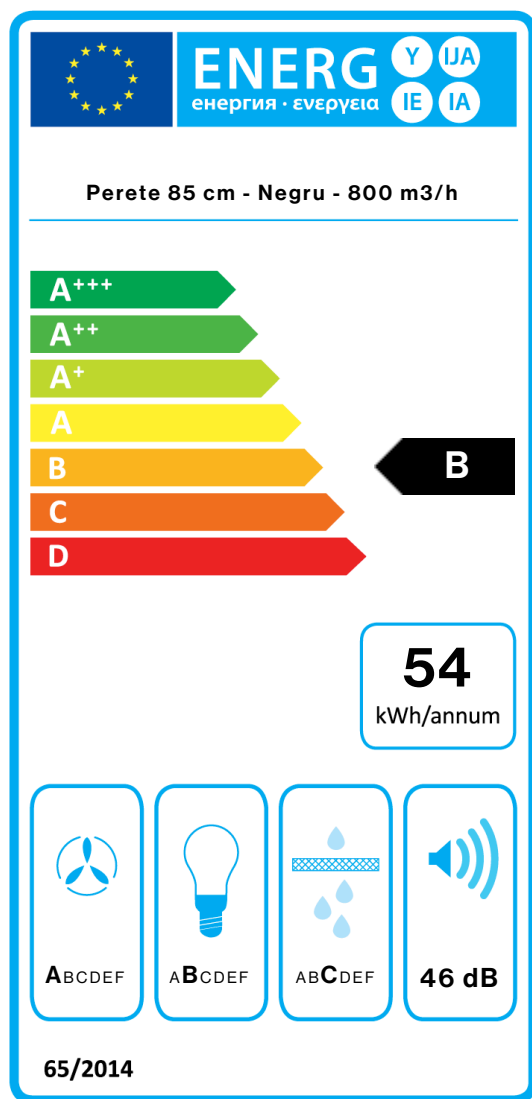

PF		
S	Falmec Spa	
M	Perete 85 cm - Negru - 800 m3/h	
AEC	53,9	kWh/a
EEC	B	
FDE	28,3	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	220,0	m ³ /h
Qmax	375,0	m ³ /h
Qboost	610,0	m ³ /h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	57,6	
Qbep	356,0	m ³ /h
Pbep	392	Pa
Qboost	610,0	m ³ /h
Wbep	137,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.