

## GRUPPO INCASSO PRO

### Version

Built-in 80 cm - 950 m3/h

### Collection

Professional

### EAN code

8034122355177



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**Electronic control**

**LED lighting**

**Optional remote control**

**Oil collector**

**Baffle filter**

**Dynamic LED Light (2700K - 5600K)**

## OPTIONAL ACCESSORIES

### KACL.770#41F

Remote under-roof 1100 m3/h  
Brushless

### KACL.786#41F

Outdoor extractor fan 1000  
m3/h

### KACL.796#4AF

Outdoor extractor fan 1500 m3/h

### KACL.797#4AF

Remote under-roof motor 1300  
m3/h

### KACL.815

Protective cleaning cloths for  
stainless steel (box 10 pcs)

## TECHNICAL FEATURES

### Installation type

Built-in

### Dimensions

80 cm

### Finishing

Scotch brite stainless steel (AISI  
304)

### Motor

1000 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 4x1,2 W - 3200 K

### Filter

3 x Metallic filter "Baffle" -  
250x175 mm

### Minimum distance

Gas hob: 60 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

16 kg

### Net weight

13 kg

### Volumes

0.17 m<sup>3</sup>

### Packaging size

Length

950 mm

Height

440 mm

Depth

395 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

320 W

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

860 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

69 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)


600 Pa

### Max. motor power

260 W

### ENERGY CLASS

B



## GRUPPO INCASSO PRO

### Version

Built-in 80 cm - 950 m<sup>3</sup>/h

### Collection

Professional


### EAN code

8034122355177

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	53	58	64	69
Capacity (m <sup>3</sup> /h) I.E.C.61591	350	470	620	860
Maximum pressure (Pa)	500	540	560	600
Motor Power (W)	185	215	240	260
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

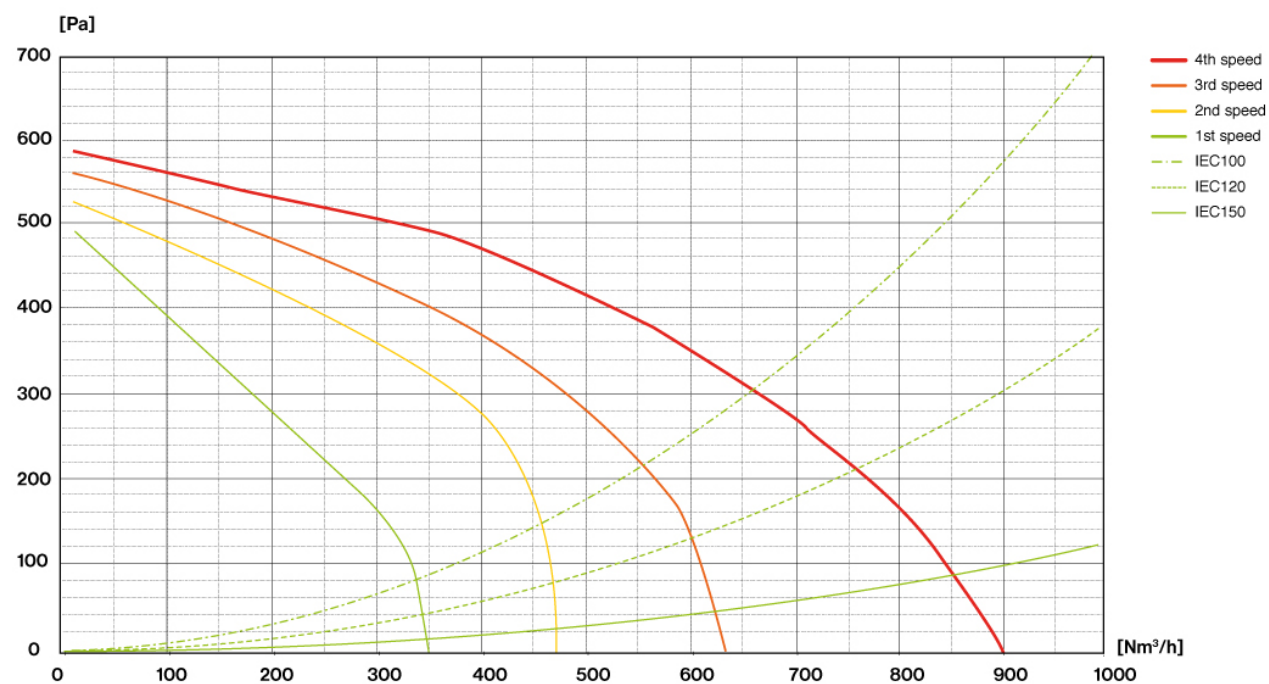

## GRUPPO INCASSO PRO

### Version

Built-in 80 cm - 950 m3/h


### Collection

Professional

### EAN code

8034122355177

## ENERGY LABEL

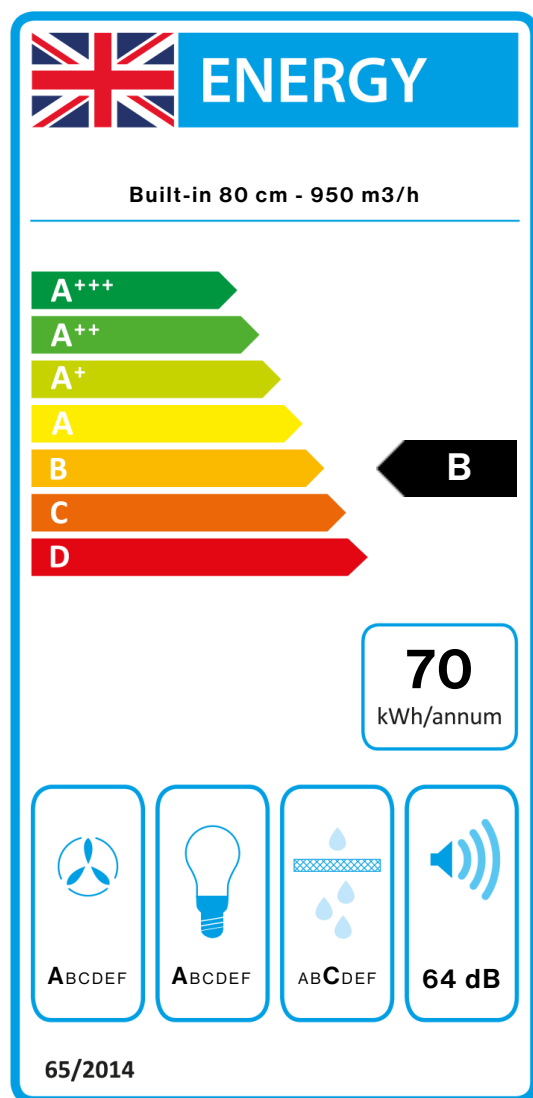

PF		
S	Falmec Spa	
M	Built-in 80 cm - 950 m3/h	
AEC	70,3	kWh/a
EEC	B	
FDE	29,3	
FDEC	A	
LE	31,4	
LEC	A	
GFE	74,0	
GFEC	C	
Qmin	350,0	m <sup>3</sup> /h
Qmax	620,0	m <sup>3</sup> /h
Qboost	860,0	m <sup>3</sup> /h
SPEmin	53	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEL	55,2	
Qbep	473,0	m <sup>3</sup> /h
Pbep	435	Pa
Qboost	860,0	m <sup>3</sup> /h
Wbep	195,0	W
WL	8,60	W
Emiddle	270	lex
Lwa-SPEmax	64	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.