

GR. INCASSO PRO

Version
Built-in 80 cm - 950 m3/h

Collection
Professional

EAN code
8034122355177



Photograph is for information purposes only
It may not correspond to the selected version.


FEATURES

- Electronic control
- LED lighting
- Remote control (optional)
- Oil collector
- Professional Baffle Filters
- Dimmable lighting
- Dynamic Light (2700K - 5600K)

Dimmable led lighting from
07.21.23

OPTIONAL ACCESSORIES

- 105080053
Remote control
- KACL.770#41F
Remote under-roof 1100 m3/h
- Brushless
- KACL.786#41F
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF
Remote under-roof motor 1300 m3/h
- KACL.815
Protective cleaning cloths for stainless steel (box 10 pcs)



TECHNICAL FEATURES

- Installation type
Built-in
- Dimensions
80 cm
- Finishing
Scotch brite stainless steel (AISI 304)
- Motor
1000 m³/h
- Type of control
Electronic control
- Speed
3 + boost
- Lighting
Led 4x1,2 W - 2700 K / 5600 K
- Filter
3 x Metallic filter "Baffle" - 250x175 mm
- Minimum distance
Gas hob: 60 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

- Gross weight
16 kg
- Net weight
13 kg
- Volumes
0.17 m³
- Packaging size
Length
950 mm
Height
440 mm
Depth
395 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption
320 W
- Voltage
220-240V
- Frequency
50-60Hz
- Plug type
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity
860 m³/h
I.E.C. 61591
- Maximum noise level
69 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)
600 Pa
- Max. motor power
260 W
- ENERGY CLASS
B

GR. INCASSO PRO

Version
Built-in 80 cm - 950 m3/h


Collection
Professional

EAN code
8034122355177

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	53	58	64	69
Capacity (m3/h) I.E.C.61591	350	470	620	860
Maximum pressure (Pa)	500	540	560	600
Power (W)	185	215	240	260
Air outlet	150	150	150	150

CAPACITY / PRESSURE

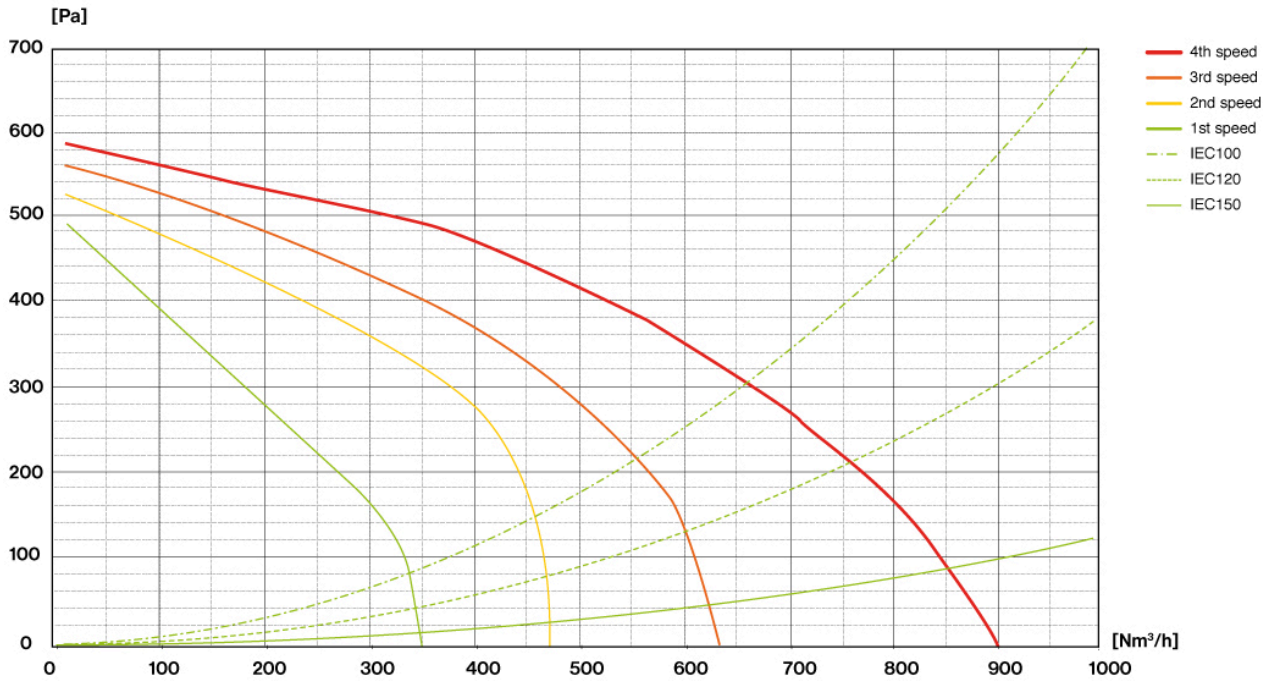


GR. INCASSO PRO

Version
Built-in 80 cm - 950 m3/h

Collection
Professional

EAN code
8034122355177

ENERGY LABEL

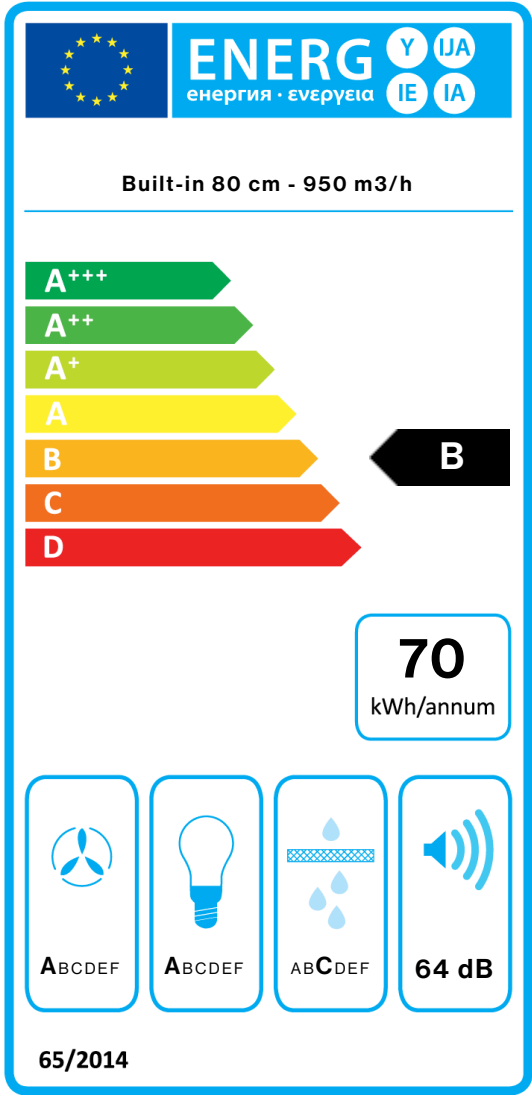

PF		
S	Falmec Spa	
M	Built-in 80 cm - 950 m3/h	
AEC	70,3	kWh/a
EEC	B	
FDE	29,3	
FDEC	A	
LE	31,4	
LEC	A	
GFE	74,0	
GFEC	C	
Qmin	350,0	m³/h
Qmax	620,0	m³/h
Qboost	860,0	m³/h
SPEmin	53	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	55,2	
Qbep	473,0	m³/h
Pbep	435	Pa
Qboost	860,0	m³/h
Wbep	195,0	W
WL	8,60	W
Emiddle	270	lux
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.