

LINE PRO

Version
Line Pro - Island - 120 cm - 950
m3/h

Designer

Collection
Professional

EAN code
8034122355207

FEATURES

Electronic control
LED lighting
Oil collector
Professional Baffle Filters

OPTIONAL ACCESSORIES

KACL.815
Protective cleaning cloths for
stainless steel (box 10 pcs)

TECHNICAL FEATURES

Installation type
Island
Dimensions
120 cm
Finishing
Scotch brite stainless steel (AISI
304)
Motor
1000 m³/h
Type of control
Electronic control
Speed
3 + boost
Lighting
Led 6x1,2 W (3200 K)
Filter
3 x Metallic filter "Buffle" -
350x350 mm
Minimum distance
Gas hob: 63 cm
Electric hob: 52 cm



Photograph is for information purposes only
It may not correspond to the selected version.

PACKAGING:WEIGHTS AND
VOLUMES


Gross weight
50 kg
Net weight
41.5 kg
Volumes
0.56 m³
Packaging size
Length
1330 mm
Height
505 mm
Depth
725 mm

CONSUMPTION AND
CONNECTION FEATURES

Maximum consumption
320 W
Voltage
220-240V
Frequency
50-60Hz
Plug type
Shuko

MOTOR TECHNICAL SHEET

Maximum capacity
860 m³/h
I.E.C. 61591
Maximum noise level
69 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
600 Pa
Max. motor power
260 W
ENERGY CLASS
B



LINE PRO

Version
Line Pro - Island - 120 cm - 950
m3/h

Designer


Collection
Professional

EAN code
8034122355207

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	53	58	64	69
Capacity (m3/h) I.E.C.61591	350	470	620	860
Maximum pressure (Pa)	500	540	560	600
Power (W)	185	215	240	260
Air outlet	150	150	150	150

CAPACITY / PRESSURE

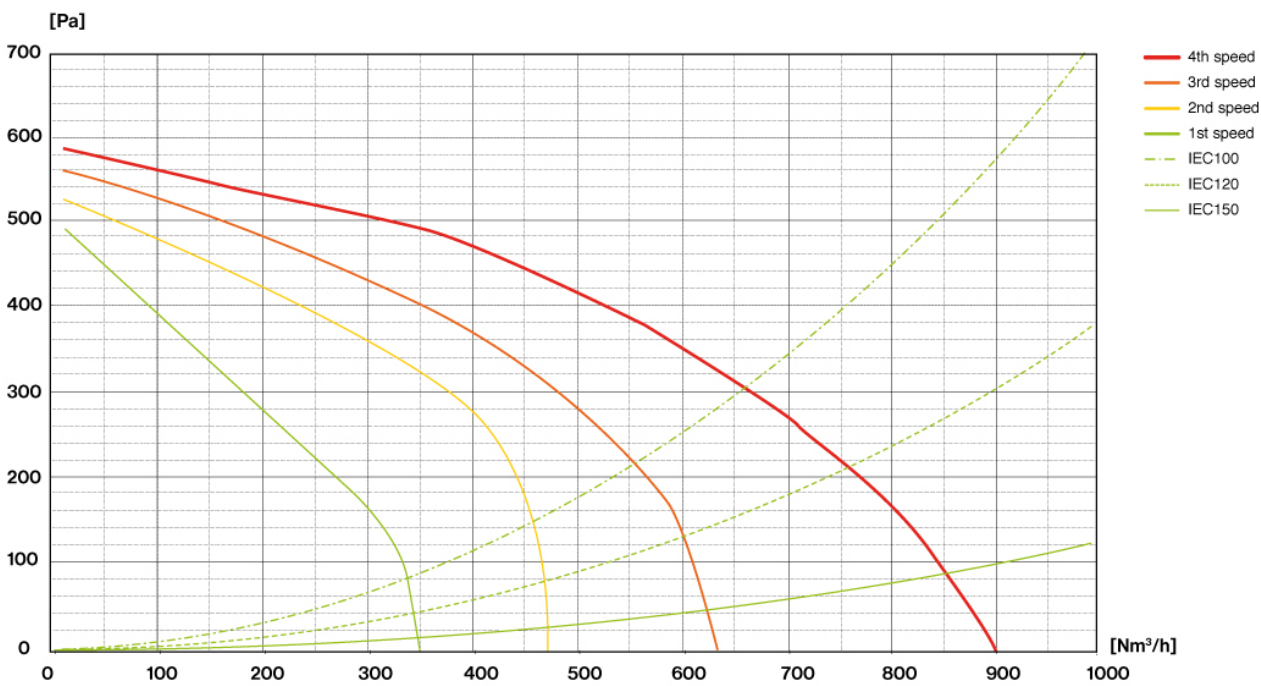

LINE PRO


Version
Line Pro - Island - 120 cm - 950 m3/h

Designer

Collection
Professional

EAN code
8034122355207

ENERGY LABEL

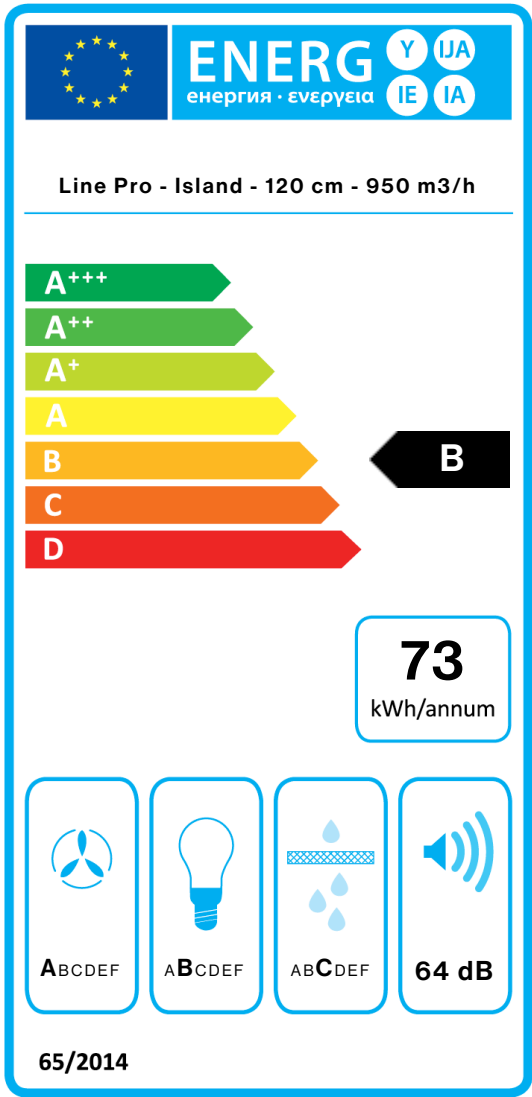

PF		
S	Falmec Spa	
M	Line Pro - Island - 120 cm - 950 m3/h	
AEC	72,8	kWh/a
EEC	B	
FDE	29,3	
FDEC	A	
LE	23,4	
LEC	B	
GFE	74,0	
GFEC	C	
Qmin	350,0	m³/h
Qmax	620,0	m³/h
Qboost	860,0	m³/h
SPEmin	53	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	56,3	
Qbep	473,0	m³/h
Pbep	435	Pa
Qboost	860,0	m³/h
Wbep	195,0	W
WL	12,00	W
Emiddle	281	lux
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.