

LINE PRO

Versiune

Insula 120 cm - 950 m³/h

Colectie

Professional

Cod EAN

8034122355207



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Control electronic

Iluminare cu LED

Colector de grasime

Filtru de grasime deflector

ACCESORII OPTIONALE

KACL.770#41F

Motor de acoperis 1100 m³/h
Brushless

KACL.786#41F

Motor de exterior 1000 m³/h

KACL.796#4AF

Motor de exterior 1500 m³/h

KACL.797#4AF

Motor de acoperis 1300 m³/h

KACL.815

Lavete pentru curatare inox
(cutie 10 buc)

CARACTERISTICI TEHNICE

Tip de instalare

Insula

Dimensiuni

120 cm

Finisaj

Inox Scotch Brite (AISI 304)

Motor

1000 m³/h

Tipul panoului de control

Control electronic

Setari de viteza

4

Iluminare

Led 6x1,2 W (3200 K)

Filtru

3 x Filtru metalic "Deflector" -
350x350 mm

Distanta minima

Plita cu gaz: 63 cm

Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

50 kg

Greutate neta

41.5 kg

Volum

0.56 m³

Dimensiuni ambalaj

Lungime

1330 mm

Inaltime

585 mm

Adancime

725 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

320 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

860 m³/h

I.E.C. 61591

Nivel de zgomot maxim

69 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)


600 Pa

Putere maxima motor

260 W

CLASA DE ENERGIE

B



LINE PRO

Versiune

Insula 120 cm - 950 m³/h

Colectie

Professional


Cod EAN

8034122355207

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	53	58	64	69
Capacitate (m ³ /h) I.E.C.61591	350	470	620	860
Presiune maxima (Pa)	500	540	560	600
Putere motor (W)	185	215	240	260
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE

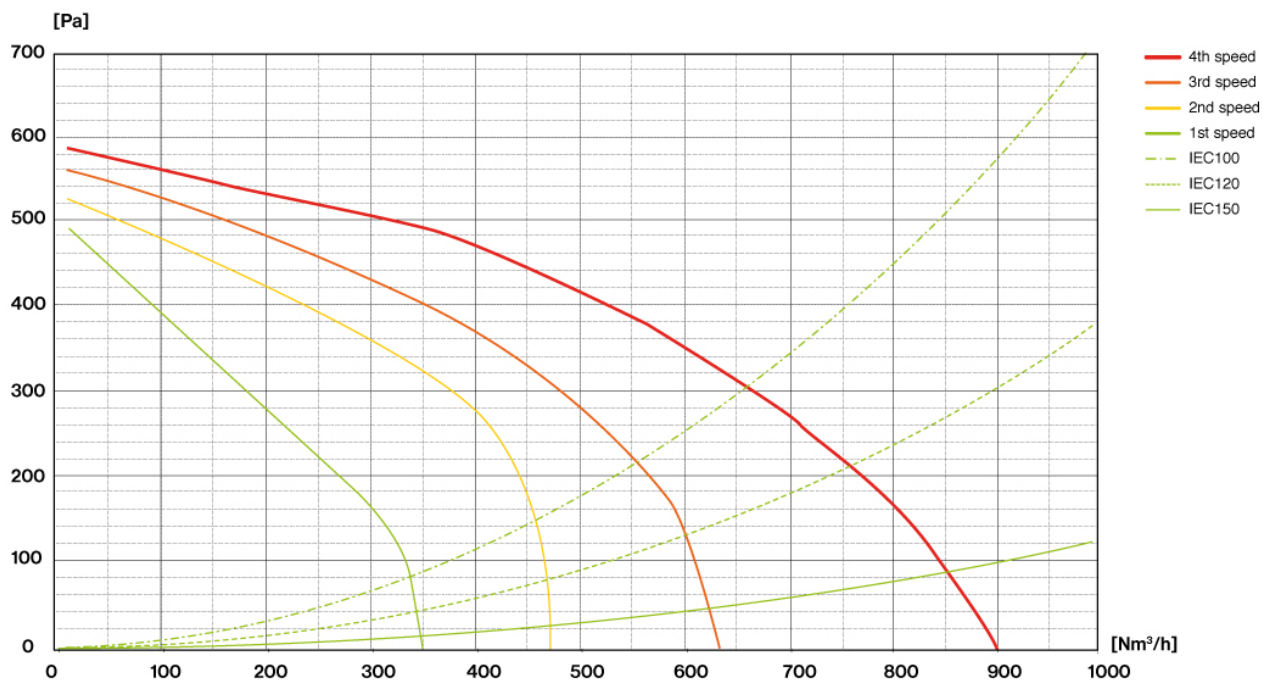

LINE PRO

Versiune

Insula 120 cm - 950 m3/h


Colectie

Professional

Cod EAN

8034122355207

ETICHETA DE ENERGIE

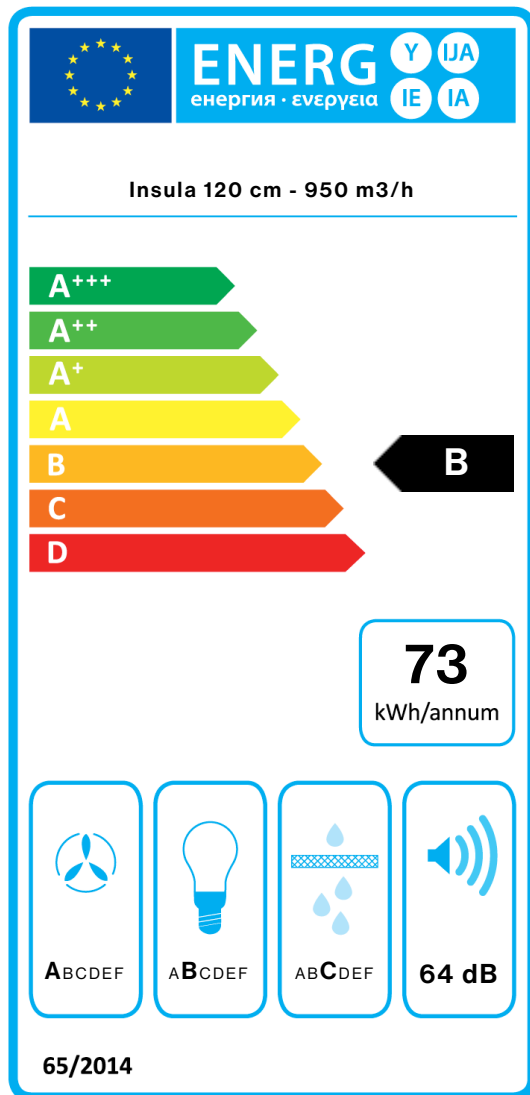

PF		
S	Falmec Spa	
M	Insula 120 cm - 950 m3/h	
AEC	72,8	kWh/a
EEC	B	
FDE	29,3	
FDEC	A	
LE	23,4	
LEC	B	
GFE	74,0	
GFEC	C	
Qmin	350,0	m ³ /h
Qmax	620,0	m ³ /h
Qboost	860,0	m ³ /h
SPEmin	53	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	56,3	
Qbep	473,0	m ³ /h
Pbep	435	Pa
Qboost	860,0	m ³ /h
Wbep	195,0	W
WL	12,00	W
Emiddle	281	lex
Lwa-SPEmax	64	dBa