

AIR WALL

Version

Designer

Collection

Elements

EAN code

8034122365312



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

Touch control
Metallic grease filter, removable and washable
Combined regenerable Carbon.Zeo filter (optional)
Diffuse illumination
Dimmable lighting
Brushless Motor
Dialogue system with auto mode

Available in 120 cm (central suction) and 150 cm (right or left suction)

OPTIONAL ACCESSORIES

105080053

Remote control

KACL.1007#NRSFF

Air Wall module panel 120 cm

KACL.1008#NRSFF

Air Wall module panel 150 cm - right suction

KACL.1009#NRSFF

Air Wall module panel 150 cm - left suction

KACL.1022#HF

Air Wall double shelf spice rack accessory

KACL.1023#HF

Air Wall accessory shelf with ladle holder

KACL.1024#HF

Air Wall book/tablet shelf accessory

KACL.1025#HF

Air Wall accessory shelf with glass rack

KACL.930

Carbon.Zeo filter unit under base h100 mm (extracting version)

KACL.951

Carbon filter unit under base Slim h60 mm (extracting version)

KACL.955

Grid for air outlet (filter unit kit under base Slim - h60mm)

TECHNICAL FEATURES

Installation type

Wall

Dimensions

120 cm

Finishing

White tempered glass finishing
Black stainless steel frame

Motor

800 m³/h

Type of control

Touch control

Speed

3 + boost

Lighting

LED (4000 K)

PACKAGING:WEIGHTS AND VOLUMES

AIR WALL Gross weight

15.2 kg

Net weight

10.6 kg

Volumes

0.22 m³

Packaging size

Length

995 mm

Height

370 mm

Depth

595 mm

GLASS KIT Air Wall module panel 120 cm **Gross weight**

19.5 kg

Packaging size

Length

945 mm

Height

105 mm

Depth

955 mm

CONSUMPTION AND CONNECTION FEATURES

Voltage




220-240V

Frequency


50-60Hz

ENERGY CLASS

A+++



Extraction version



Filtering version

AIR WALL

Version


Designer

Collection
Elements

EAN code

8034122365312

ENERGY LABEL

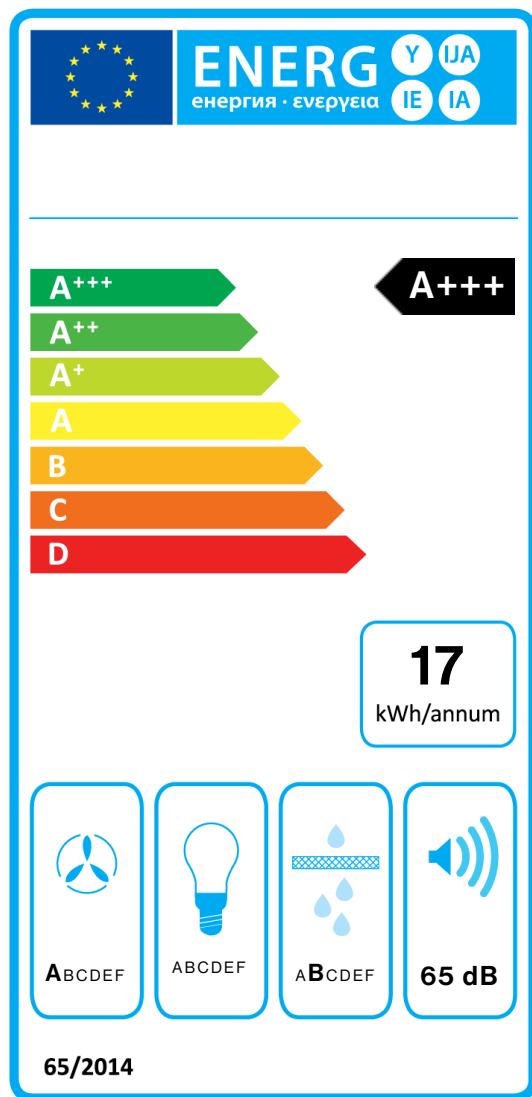

PF		
S	Falmec Spa	
M		
AEC	16,5	kWh/a
EEC	A+++	
FDE	43,4	
FDEC	A	
LE	0,0	
LEC	0	
GFE	87,0	
GFEC	B	
Qmin	440,0	m ³ /h
Qmax	620,0	m ³ /h
Qboost	670,0	m ³ /h
SPEmin	59	dBa
SPEmax	65	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.4	
EEl	21,3	
Qbep	384,0	m ³ /h
Pbep	460	Pa
Qboost	670,0	m ³ /h
Wbep	113,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.