

## AIR WALL

### Version

### Designer

### Collection

Elements

### EAN code

8034122365312



Photograph is for information purposes only  
It may not correspond to the selected version.

## FEATURES

**Touch control**  
**Metallic grease filter, removable and washable**  
**Combined regenerable Carbon.Zeo filter (optional)**  
**Diffuse illumination**  
**Dimmable lighting**  
**Brushless Motor**  
**Dialogue system with auto mode**

Available in 120 cm (central suction) and 150 cm (right or left suction)

## OPTIONAL ACCESSORIES

### 105080053

Remote control

### KACL.1007#NRSFF

Air Wall module panel 120 cm

### KACL.1008#NRSFF

Air Wall module panel 150 cm - right suction

### KACL.1009#NRSFF

Air Wall module panel 150 cm - left suction

### KACL.1022#HF

Air Wall double shelf spice rack accessory

### KACL.1023#HF

Air Wall accessory shelf with ladle holder

### KACL.1024#HF

Air Wall book/tablet shelf accessory

### KACL.1025#HF

Air Wall accessory shelf with glass rack

### KACL.930

Carbon.Zeo filter unit under base h100 mm (extracting version)

### KACL.951

Carbon filter unit under base Slim h60 mm (extracting version)

### KACL.955

Grid for air outlet (filter unit kit under base Slim - h60mm)

## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

120 cm

### Finishing

White tempered glass finishing  
Black stainless steel frame

### Motor

800 m<sup>3</sup>/h

### Type of control

Touch control

### Speed

3 + boost

### Lighting

LED (4000 K)

## PACKAGING:WEIGHTS AND VOLUMES

### AIR WALL Gross weight

15.2 kg

### Net weight

10.6 kg

### Volumes

0.22 m<sup>3</sup>

### Packaging size

Length

995 mm

Height

370 mm

Depth

595 mm

**GLASS KIT** Air Wall module panel 120 cm **Gross weight**

19.5 kg

### Packaging size

Length

945 mm

Height

105 mm

Depth

955 mm

## CONSUMPTION AND CONNECTION FEATURES

### Voltage




220-240V

### Frequency


50-60Hz

### ENERGY CLASS

A+++



Extraction version



Filtering version

AIR WALL

Version


Designer

Collection  
Elements

EAN code

8034122365312

## ENERGY LABEL

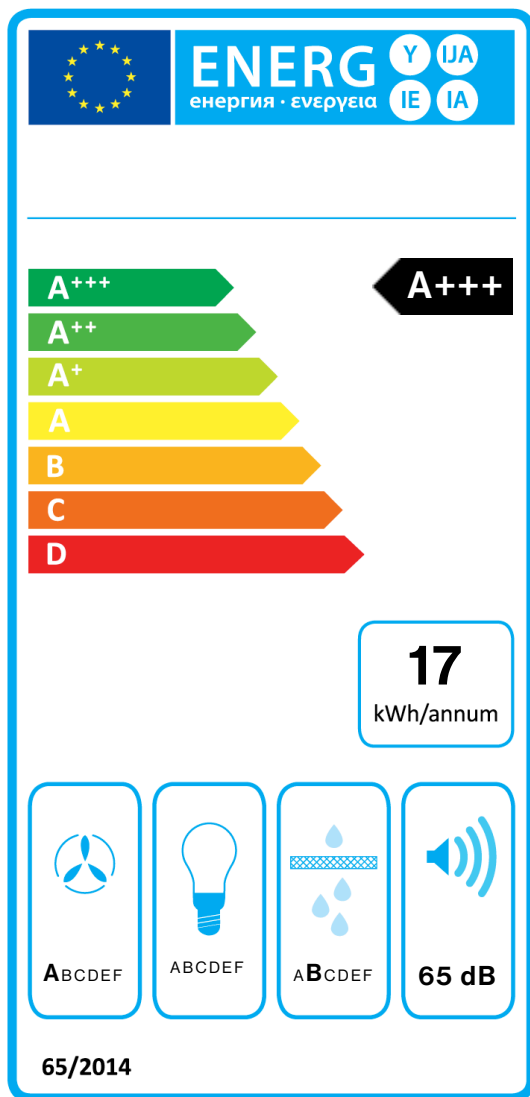

PF		
S	Falmec Spa	
M		
AEC	16,5	kWh/a
EEC	A+++	
FDE	43,4	
FDEC	A	
LE	0,0	
LEC	0	
GFE	87,0	
GFEC	B	
Qmin	440,0	m <sup>3</sup> /h
Qmax	620,0	m <sup>3</sup> /h
Qboost	670,0	m <sup>3</sup> /h
SPEmin	59	dBa
SPEmax	65	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.4	
EEl	21,3	
Qbep	384,0	m <sup>3</sup> /h
Pbep	460	Pa
Qboost	670,0	m <sup>3</sup> /h
Wbep	113,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	65	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.