

ZEUS PRO

Væg - 120 cm - Stål - 950 m³/h

Sortiment

Professional

EAN Kode

8034122355306



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Elektronisk kontrolpanel
LED lys
Mulighed for bagudvendning af motor
Fedtopsamler
Professional Baffle Filters
Dæmpbart LED-lys
Dynamic LED Light (2700K - 5600K)
Scotch brite rustfrit stål

From 04.11.2024 the dynamic and dimmable light is included.

MULIGHEDER FOR TILVALG

07MAGIC

Beskyttende rensklude til rustfrit stål. Kasse med 10 klude

TEKNISK BESKRIVELSE

Installation
Væg

Dimensioner
120 cm

Materiale
Scotch brite rustfrit stål (AISI 304)

Motor
1000 m³/h

Betjening
Elektronisk kontrolpanel

Hastighed
3 + boost

Belysning
Led 4x1,2 W - 2700 K / 5600 K

Filter
3 x Metallfiltre - Baffle - 350x350 mm

Minimumsafstand
Gaskomfur: 63 cm
Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt
36 kg

Nettovægt
31 kg

Volumen
0.48 m³

Mål på emballage

Længde
1310 mm

Højde
620 mm

Dybde
595 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug
320 W

Spænding
220-240V

Frekvens
50-60Hz

Shuko

DATABLAD MOTOR



Maksimal kapacitet
860 m³/h
I.E.C. 61591

Maksimalt støjniveau
69 dB(A)re1pW
I.E.C.60704-2-13


Maksimalt tryk (Pa)
600 Pa

Maksimal sugestyrke
260 W

ENERGIKLASSE
B



Rear view



Optional chimney

ZEUS PRO

Væg - 120 cm - Stål - 950 m³/h

Sortiment

Professional


EAN Kode

8034122355306

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	53	58	64	69
Kapacitet (m ³ /h) I.E.C.61591	350	470	620	860
Maksimalt tryk (Pa)	500	540	560	600
Forbrug (W)	185	215	240	260
Luftudtag	150	150	150	150

KAPACITET / TRYK

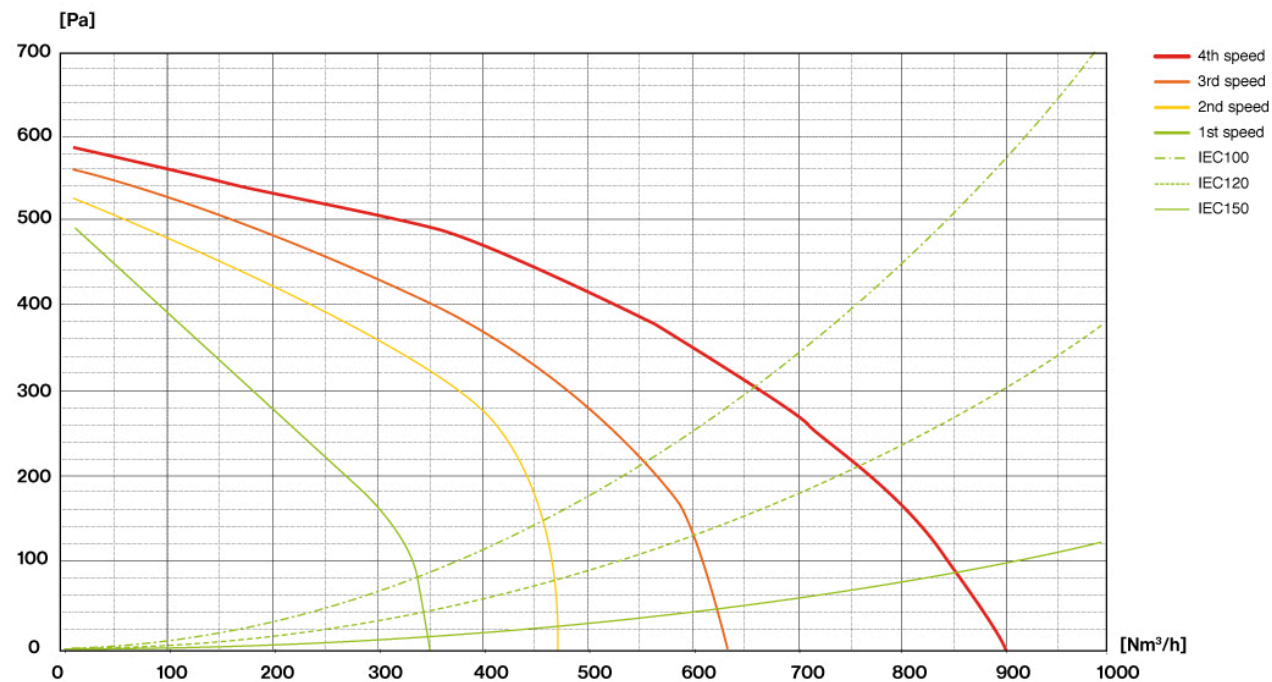

ZEUS PRO


Væg - 120 cm - Stål - 950 m³/h

Sortiment

Professional

EAN Kode

8034122355306

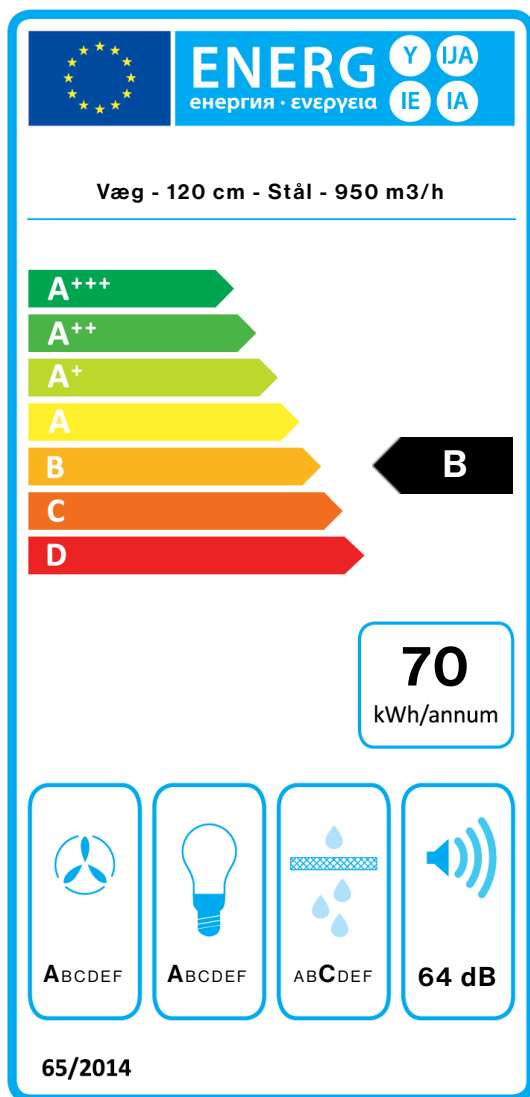

PF		
S	Falmec Spa	
M	Væg - 120 cm - Stål - 950 m ³ /h	
AEC	70,3	kWh/a
EEC	B	
FDE	29,3	
FDEC	A	
LE	31,4	
LEC	A	
GFE	74,0	
GFEC	C	
Qmin	350,0	m ³ /h
Qmax	620,0	m ³ /h
Qboost	860,0	m ³ /h
SPEmin	53	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	55,2	
Qbep	473,0	m ³ /h
Pbep	435	Pa
Qboost	860,0	m ³ /h
Wbep	195,0	W
WL	8,60	W
Emiddle	270	lux
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.