

## ZEUS PRO

Væg - 90 cm - Stål - 950 m<sup>3</sup>/h

### Sortiment

Professional

### EAN Kode

8034122355313



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

Elektronisk kontrolpanel  
LED lys  
Mulighed for bagudvending af motor  
Fedtopsamlers  
Professional Baffle Filters  
Dæmpbart LED-lys  
Scotch brite rustfrit stål  
Dynamic LED Light (2700K - 5600K)

From 04.11.2024 the dynamic and dimmable light is included.

### MULIGHEDER FOR TILVALG

#### 07MAGIC

Beskyttende rensklude til rustfrit stål. Kasse med 10 klude

## TEKNISK BESKRIVELSE

**Installation**  
Væg

**Dimensioner**  
90 cm

**Materiale**  
Scotch brite rustfrit stål (AISI 304)

**Motor**  
1000 m<sup>3</sup>/h

**Betjening**  
Elektronisk kontrolpanel

**Hastighed**  
3 + boost

**Belysning**  
Led 3x1,2 W - 2700 K / 5600 K

**Filter**  
2 x Metallfiltre - Baffle - 350x350 mm

**Minimumsafstand**  
Gaskomfur: 63 cm  
Kogeplade: 52 cm

## EMBALLAGE: VÆGT OG VOLUMEN

**Bruttovægt**  
29 kg

**Nettovægt**  
25 kg

**Volumen**  
0.37 m<sup>3</sup>

**Mål på emballage**

Længde  
995 mm

Højde  
620 mm

Dybde  
595 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

**Maksimalt forbrug**  
320 W

**Spænding**  
220-240V

**Frekvens**  
50-60Hz

Shuko

### DATABLAD MOTOR

**Maksimal kapacitet**  
860 m<sup>3</sup>/h

I.E.C. 61591



**Maksimalt støjniveau**  
69 dB(A)re1pW

I.E.C.60704-2-13


**Maksimalt tryk (Pa)**  
600 Pa

**Maksimal sugestyrke**  
260 W

**ENERGIKLASSE**  
A



Rear view



Optional chimney

## ZEUS PRO

Væg - 90 cm - Stål - 950 m<sup>3</sup>/h

### Sortiment

Professional


### EAN Kode

8034122355313

## DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	53	58	64	69
Kapacitet (m <sup>3</sup> /h) I.E.C.61591	350	470	620	860
Maksimalt tryk (Pa)	500	540	560	600
Forbrug (W)	185	215	240	260
Luftudtag	150	150	150	150

## KAPACITET / TRYK

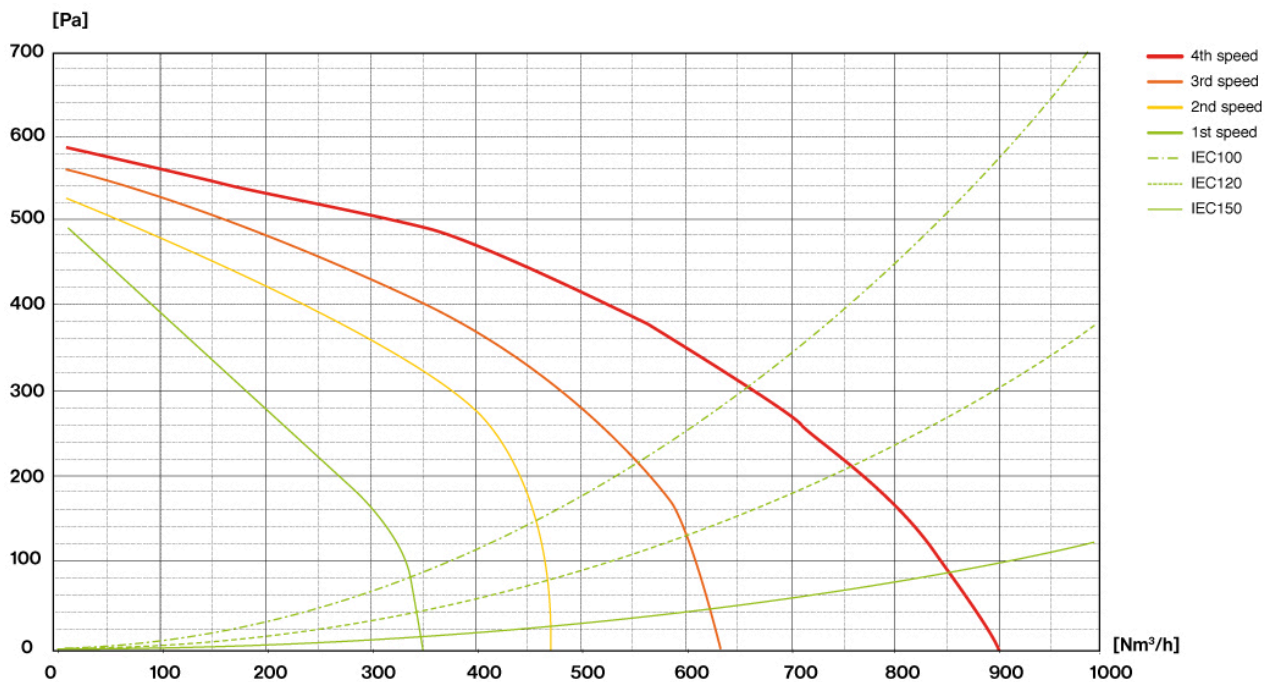

## ZEUS PRO


Væg - 90 cm - Stål - 950 m3/h

### Sortiment

Professional

### EAN Kode

8034122355313

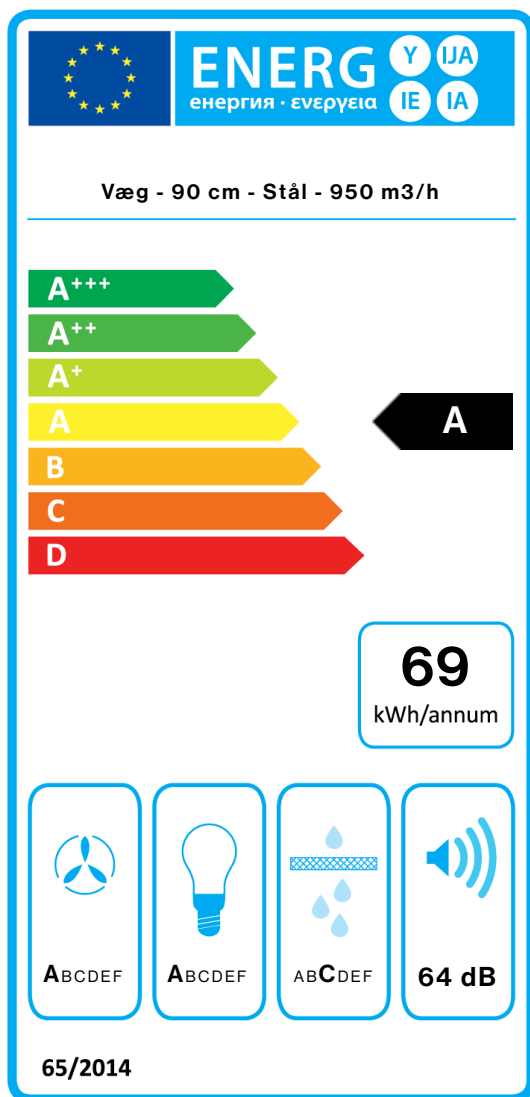

PF		
S	Falmec Spa	
M	Væg - 90 cm - Stål - 950 m3/h	
AEC	68,8	kWh/a
EEC	A	
FDE	29,3	
FDEC	A	
LE	37,0	
LEC	A	
GFE	74,0	
GFEC	C	
Qmin	350,0	m³/h
Qmax	620,0	m³/h
Qboost	860,0	m³/h
SPEmin	53	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEL	54,6	
Qbep	473,0	m³/h
Pbep	435	Pa
Qboost	860,0	m³/h
Wbep	195,0	W
WL	6,50	W
Emiddle	157	lux
Lwa-SPEmax	64	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.