

ELIOS

Versiune

Colt 100 cm - 800 m³/h

Colectie

Design

Cod EAN

8034122306322



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Control electronic

Iluminare cu LED

Filtru de aer Air Falmec pentru aspiratie echilibrata

Filtru de carbon inclus

ACCESORII OPTIONALE

KACL.560#1

Extensie H850 - Perete

KACL.770#41F

Motor de acoperis 1100 m³/h
Brushless

KACL.786#41F

Motor de exterior 1000 m³/h

KACL.796#4AF

Motor de exterior 1500 m³/h

KACL.797#4AF

Motor de acoperis 1300 m³/h

KACL.798#41F

Motor de acoperis 950 m³/h

KACL.815

Lavete pentru curatare inox
(cutie 10 buc)

CARACTERISTICI TEHNICE

Tip de instalare

De colt

Dimensiuni

100 cm

Finisaj

Inox Scotch Brite (AISI 304)

Finisaj parte inferioara rama:

Inox

Motor

800 m³/h

Tipul panoului de control

Control electronic

Setari de viteza

4

Iluminare

LED 3x1,2 W - 3200 K

Filtru

2 x Filtru metalic "Air Falmec" -
Perete 278x301 mm

Filtru de Carbon

Filtru de carbon rotund Ø170 mm
- Tip 6 (inclus)

Distanta minima

Plita cu gaz: 65 cm

Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

26 kg

Greutate neta

19 kg

Volum

0.51 m³

Dimensiuni ambalaj

Lungime

1115 mm

Inaltime

415 mm

Adancime

1100 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

280 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

680 m³/h

I.E.C. 61591

Nivel de zgomot maxim

68 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)


500 Pa

Putere maxima motor

215 W

CLASA DE ENERGIE

B



ELIOS

Versiune

Colt 100 cm - 800 m³/h

Colectie

Design


Cod EAN

8034122306322

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	56	62	68
Capacitate (m ³ /h) I.E.C.61591	280	370	480	680
Presiune maxima (Pa)	390	420	480	500
Putere motor (W)	132	153	175	215
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE

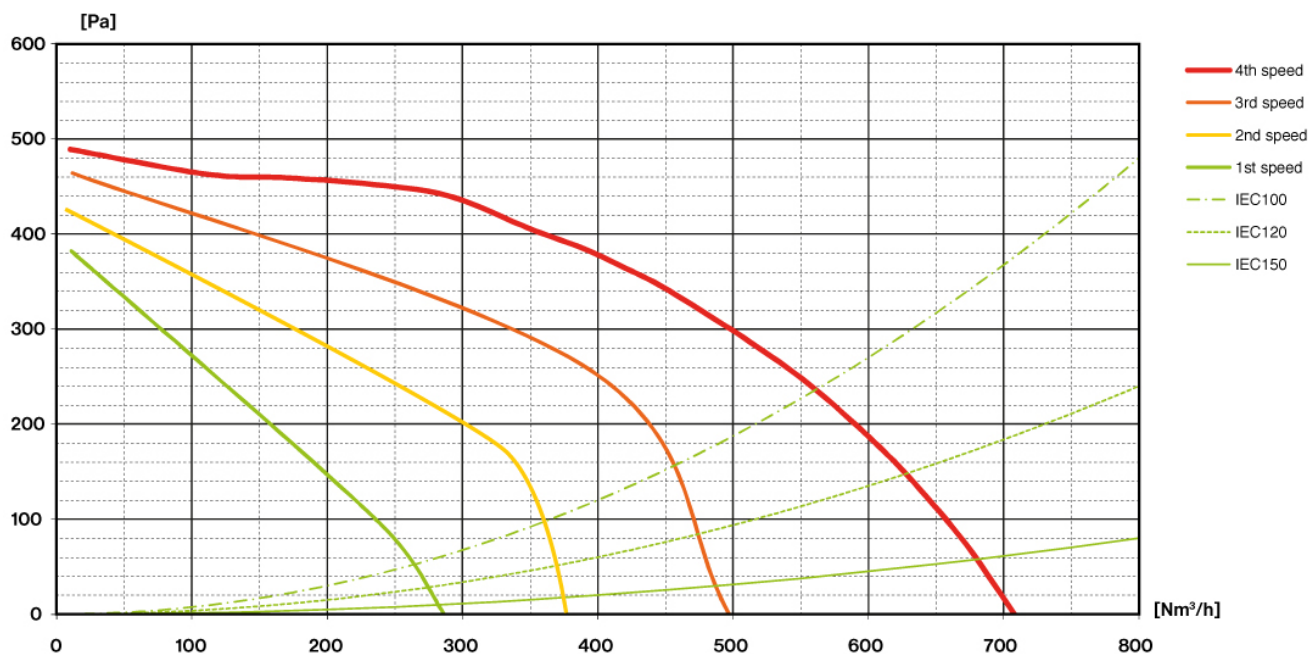

ELIOS

Versiune

Colt 100 cm - 800 m³/h


Colectie

Design

Cod EAN

8034122306322

ETICHETA DE ENERGIE

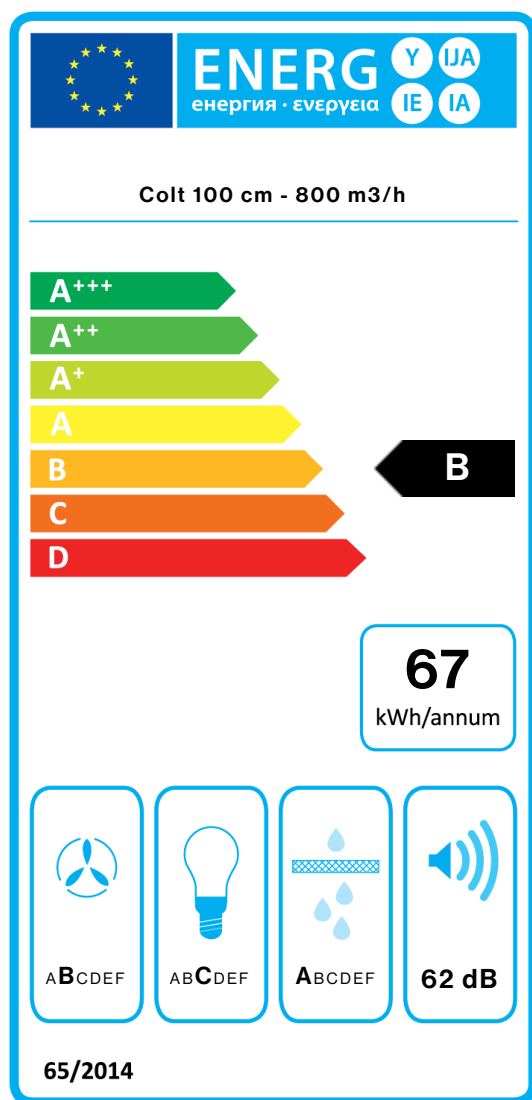

PF		
S	Falmec Spa	
M	Colt 100 cm - 800 m ³ /h	
AEC	67,0	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	18,3	
LEC	C	
GFE	96,0	
GFEC	A	
Qmin	280,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	680,0	m ³ /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	64,3	
Qbep	382,0	m ³ /h
Pbep	384	Pa
Qboost	680,0	m ³ /h
Wbep	155,1	W
WL	6,50	W
Emiddle	119	lex
Lwa-SPEmax	62	dBa