

EUROPA

Versiune

Insula 120 cm - 800 m³/h

Colectie

Fasteel

Cod EAN

8034122200187



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Inox FASTEEL (anti-amprente)
Scotch Brite
Aspiratie perimetrala
Control electronic
Iluminare cu LED
Filtru de grasime metalic, detasabil si lavabil
Filtru de carbon inclus

ACCESORII OPTIONALE

KACL.065

Sticla insula 120 cm

KACL.770#41F

Motor de acoperis 1100 m³/h
Brushless

KACL.786#41F

Motor de exterior 1000 m³/h

KACL.796#4AF

Motor de exterior 1500 m³/h

KACL.797#4AF

Motor de acoperis 1300 m³/h

KACL.798#41F

Motor de acoperis 950 m³/h

KACL.815

Lavete pentru curatare inox
(cutie 10 buc)

CARACTERISTICI TEHNICE

Tip de instalare
Insula
Dimensiuni
120 cm
Finisaj
Inox FASTEEL (anti-amprente)
Scotch brite
Motor
800 m³/h
Tipul panoului de control
Control electronic
Setari de viteza
4
Iluminare
LED 4x1,2 W - 3200 K
Filtru
2 x Filtru metalic "Base" -
274x274 mm
Filtru de Carbon
Filtru de carbon rectangular -
Tip 3 (inclus)
Distanta minima
Plita cu gaz: 63 cm
Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM


Greutate bruta
49 kg
Greutate neta
41 kg
Volum
0.53 m³
Dimensiuni ambalaj
Lungime
1330 mm
Inaltime
550 mm
Adancime
725 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim
280 W
Curent
220-240V
Frecventa
50-60Hz
Tip stecher
Shuko

FISA TEHNICA MOTOR

Capacitate maxima
670 m³/h
I.E.C. 61591
Nivel de zgomot maxim
67 dB(A)re1pW
I.E.C.60704-2-13
Presiune maxima (Pa)
500 Pa
Putere maxima motor
215 W
CLASA DE ENERGIE
B



EUROPA

Versiune

Insula 120 cm - 800 m³/h

Colectie

Fasteel


Cod EAN

8034122200187

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacitate (m ³ /h) I.E.C.61591	270	360	470	670
Presiune maxima (Pa)	390	420	460	500
Putere motor (W)	134	156	180	215
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE

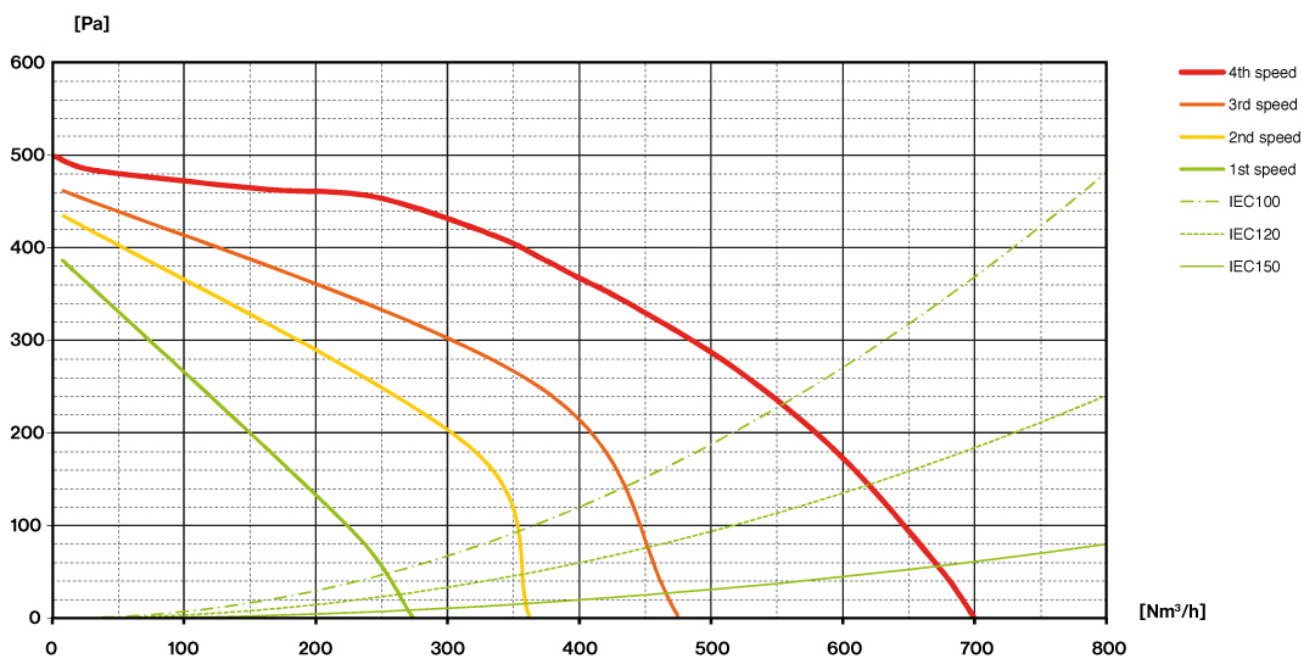

EUROPA

Versiune

Insula 120 cm - 800 m³/h


Colectie

Fasteel

Cod EAN

8034122200187

ETICHETA DE ENERGIE

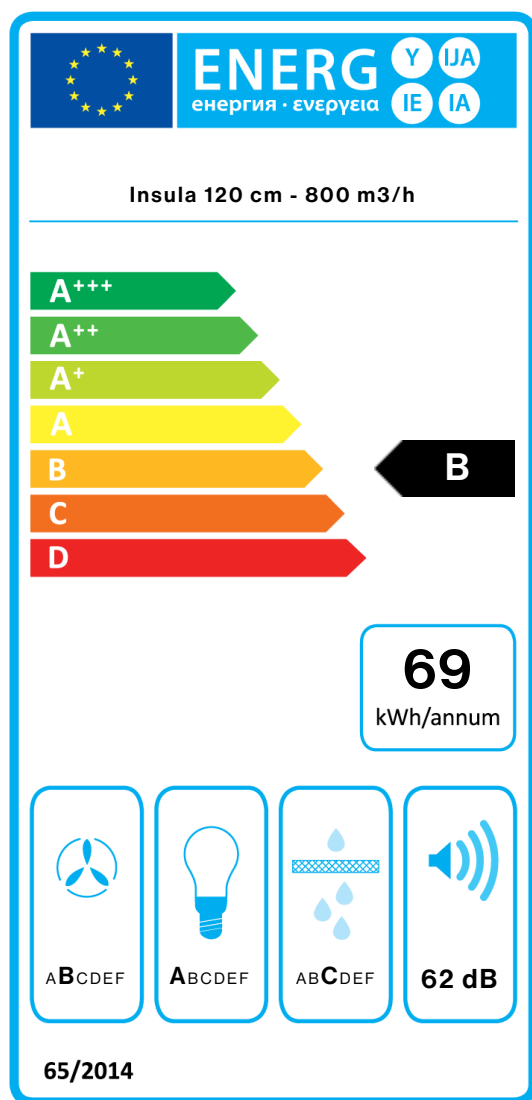

PF		
S	Falmec Spa	
M	Insula 120 cm - 800 m ³ /h	
AEC	68,6	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	28,4	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	280,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	680,0	m ³ /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	65,1	
Qbep	382,0	m ³ /h
Pbep	384	Pa
Qboost	680,0	m ³ /h
Wbep	155,1	W
WL	8,60	W
Emiddle	245	lex
Lwa-SPEmax	62	dBa