

## VERSO

01VER-55-VGS Væg - 55cm  
Sort - 800 m<sup>3</sup>/h

### Sortiment

Design

### EAN Kode

8034122358734



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

Tempereret glas  
Touch control og 24 t. funktion  
Vaskbare rustfrie fedtfiltere  
Mulighed for Kul/Zeolitfilter.  
Regenererbart  
Kulfilter  
Mulighed for bagudvendning af motor  
Skorsten medfølger ved aftræk  
Dynamic LED Light (2700K - 5600K)

## MULIGHEDER FOR TILVALG

### 01RECIRK-941

Ekstern filterenhed til skrå emfang

### KACL.865

Air flow conveyer til recirkulation. Væghængte modeller.

### KACL.958#NF

Ekstern filterenhed til skrå emfang (Black)

### KCQAN.00#N

Optional chimney (Black)

## TEKNISK BESKRIVELSE

### Installation

Væg

### Dimensioner

55 cm

### Materiale

Sort tempereret glas

### Motor

800 m<sup>3</sup>/h

### Betjening

Betjening med touch

### Hastighed

3 + boost

### Belysning

Led 2x1,2 W - 2700 K / 5600 K

### Kulfilter

Rundt kulfilter Ø170 mm. Type 6 (Tilvalg)

### Minimumsafstand

Gaskomfur: 52 cm

Kogeplade: 52 cm

## EMBALLAGE: VÆGT OG VOLUMEN

### Bruttovægt

20.3 kg

### Nettovægt

16.2 kg

### Volumen

0.17 m<sup>3</sup>

### Mål på emballage

Længde

710 mm

Højde

450 mm

Dybde

595 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

### Maksimalt forbrug

280 W

### Spænding

220-240V

### Frekvens

50-60Hz

Schuko

### DATABLAD MOTOR

#### Maksimal kapacitet

750 m<sup>3</sup>/h

I.E.C. 61591

#### Maksimalt støjniveau

66 dB(A)<sub>re1pW</sub>

I.E.C.60704-2-13

#### Maksimalt tryk (Pa)



510 Pa

#### Maksimal sugestyrke

224 W

### ENERGIKLASSE

A





## VERSO

01VER-55-VGS Væg - 55cm


Sort - 800 m3/h

### Sortiment

Design

### EAN Kode

8034122358734

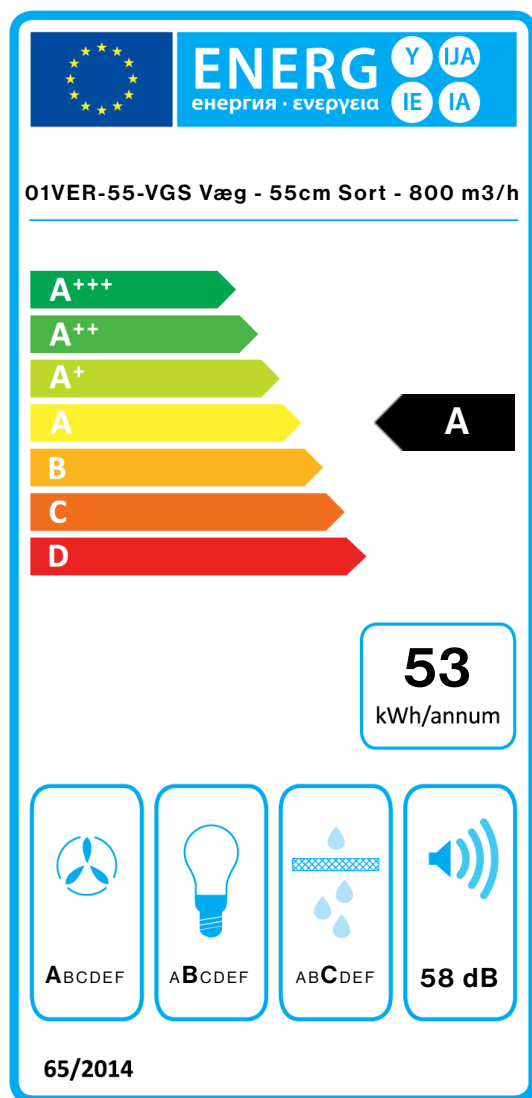

PF		
S	Falmec Spa	
M	01VER-55-VGS Væg - 55cm Sort - 800 m3/h	
AEC	53,1	kWh/a
EEC	A	
FDE	31,6	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	295,0	m³/h
Qmax	500,0	m³/h
Qboost	750,0	m³/h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEI	52,7	
Qbep	440,0	m³/h
Pbep	388	Pa
Qboost	750,0	m³/h
Wbep	150,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	58	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.