

VERSO

Version
Black - 55cm - 800 m3/h

Collection
Design

EAN code
8034122358734



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Tempered glass
Touch control + 24 h function
Metallic grease filter,
removable and washable
Optional combined regenerable
Carbon.Zeo filter
Charcoal filter included
Possible to duct wall mounted
from rear
Optional Chimney
Dynamic LED Light (2700K -
5600K)

OPTIONAL ACCESSORIES

KACL.770#41F
Remote under-roof 1100 m3/h
Brushless
KACL.786#41F
Outdoor extractor fan 1000
m3/h
KACL.796#4AF
Outdoor extractor fan 1500 m3/h
KACL.797#4AF
Remote under-roof motor 1300
m3/h
KACL.798#41F
Remote under-roof motor 950
m3/h
KACL.941
External filter unit for sloped
hoods
KACL.958#NF
External filter unit for sloped
hoods (Black)
KCQAN.00#N
Optional chimney (Black)

TECHNICAL FEATURES

Installation type
Wall
Dimensions
55 cm
Finishing
Black tempered glass
Motor
800 m³/h
Type of control
Touch control
Speed settings
4
Lighting
Led 2x1,2 W - 2700 K / 5600 K
Charcoal filter
Round charcoal filter Ø170 mm -
Type 6 (optional)
Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND
VOLUMES



Gross weight
19.7 kg
Net weight
16.2 kg
Volumes
0.17 m³
Packaging size
Length
710 mm
Height
450 mm
Depth
595 mm

CONSUMPTION AND
CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz
Plug type
Schuko

MOTOR TECHNICAL SHEET

Maximum capacity
750 m³/h
I.E.C. 61591
Maximum noise level
66 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
510 Pa
Max. motor power
224 W
ENERGY CLASS
A



VERSO

Version
Black - 55cm - 800 m3/h


Collection
Design

EAN code
8034122358734

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	46	53	58	66
Capacity (m3/h) I.E.C.61591	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE
[Pa]

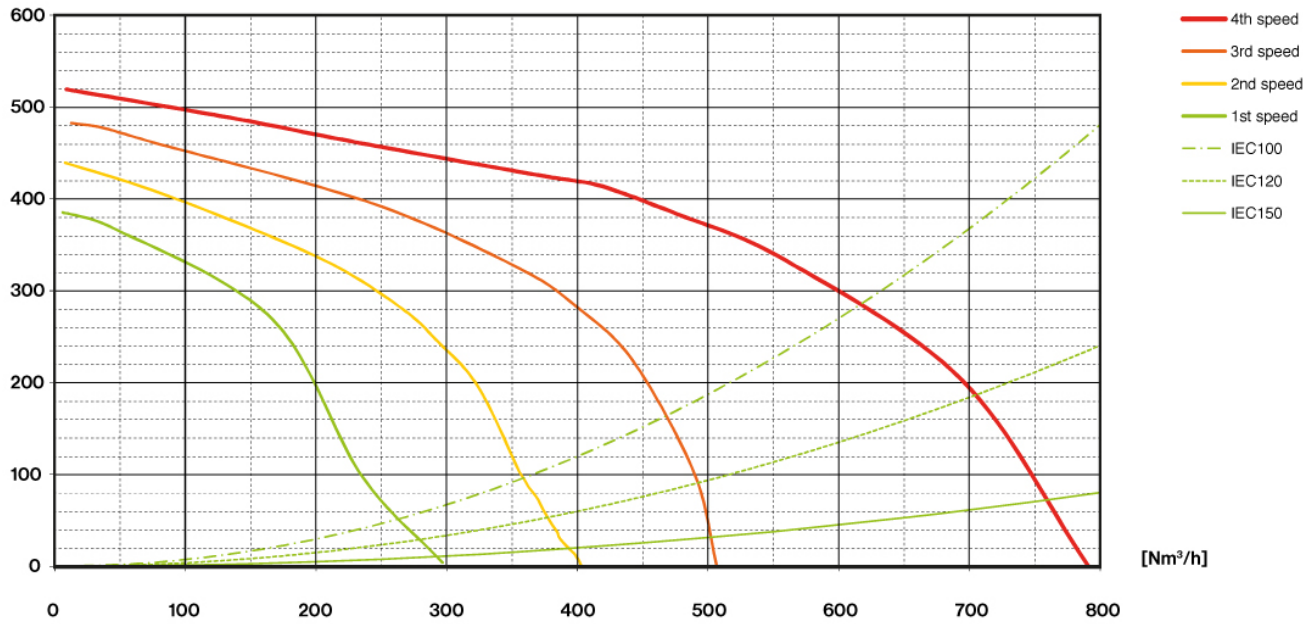


VERSO

Version
Black - 55cm - 800 m3/h

Collection
Design

EAN code
8034122358734

ENERGY LABEL

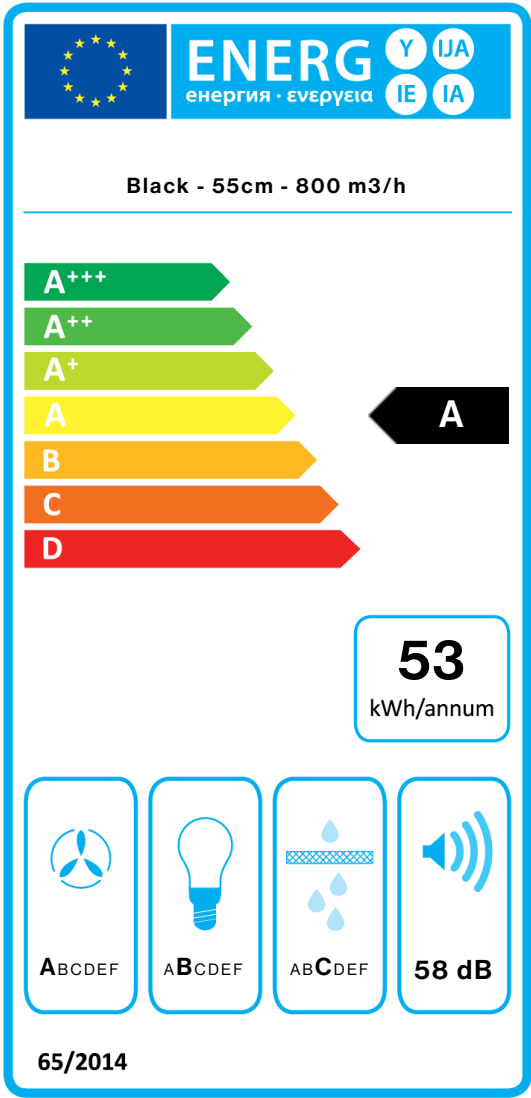

PF		
S	Falmec Spa	
M	Black - 55cm - 800 m3/h	
AEC	53,1	kWh/a
EEC	A	
FDE	31,6	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	295,0	m³/h
Qmax	500,0	m³/h
Qboost	750,0	m³/h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEL	52,7	
Qbep	440,0	m³/h
Pbep	388	Pa
Qboost	750,0	m³/h
Wbep	150,0	W
WL	5,30	W
Emiddle	114	lex
Lwa-SPEmax	58	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.