

## SINTESI

01SINTESI-90 Bordemfang  
Sintesi - 600 m<sup>3</sup>/h

### Sortiment

Bordemhætte

### EAN Kode

8034122358918



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

4 kogezone med aut.  
grydegenkendelse  
Restvarme indikator  
Hold varm funktion  
9 varmetrin + powerfunktion  
(Dobble boost)  
Automatisk gryde sensor  
Timer. Minutur  
Børnesikring  
Pause og genkald  
Flex zone  
Dobbelt brofunktion  
Automatisk sluk-timer  
Power management system på 3  
trin: 2.8 kw, 3.5 kw, 7.4 kw  
Børsteløs motor  
Touch glidekontrol med rødt  
LED-display  
Advarsel for vedligeholdelse af  
fedtfiltere  
Induktion

## TEKNISK BESKRIVELSE

**Installation**  
Kogeplade  
**Dimensioner**  
88 cm  
**Materiale**  
Sort Schott glas  
Stainless steel frame  
**Motor**  
600 m<sup>3</sup>/h  
**Betjening**  
Betjening med touch  
**Hastighed**  
9 + boost

## EMBALLAGE: VÆGT OG VOLUMEN

**Bruttovægt**  
35.2 kg  
**Nettovægt**  
28.8 kg  
**Volumen**  
0.28 m<sup>3</sup>  
**Mål på emballage**  
Længde  
980 mm  
Højde  
385 mm  
Dybde  
780 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

**Maksimalt forbrug**  
7560 W  
**Spænding**  
220-240V  
**Frekvens**  
50-60Hz

## DATABLAD MOTOR

**Maksimal kapacitet**  
520 m<sup>3</sup>/h  
I.E.C. 61591  
**Maksimalt støjniveau**  
69 dB(A)re1pW  
I.E.C.60704-2-13  
**Maksimalt tryk (Pa)**  
620 Pa  
**Maksimal sugestyrke**  
150 W  
**ENERGIKLASSE**  
A++

## MULIGHEDER FOR TILVALG

### KACL.930

Kit kul / zeolitfilter

### KACL.931

Kit. Løst kul / zeolitfilter

### KACL.951

Underbase Slim filter unit  
(h60mm)

### KACL.952

Filter replacement (underbase  
Slim filter unit - h60mm)

### KACL.955



Base grid (underbase Slim filter  
unit - h60mm)

## SINTESI




01SINTESI-90 Bordemfang  
Sintesi - 600 m<sup>3</sup>/h

**Sortiment**  
Bordemhætte

**EAN Kode**  
8034122358918



Side view



## SINTESI

01SINTESI-90 Bordemfang  
Sintesi - 600 m3/h

### Sortiment

Bordemhætte


### EAN Kode

8034122358918

## DATABLAD MOTOR

| Motorhastighed   | 1      | 5      | 9      | 10     |
|--|--------|--------|--------|--------|
| Støjniveau<br>dB(A) <sub>re1pW</sub> -<br>I.E.C.60704-2-13 | 48     | -      | 66     | 69     |
| Kapacitet (m3/h)<br>I.E.C.61591                            | 260    | 395    | 480    | 520    |
| Maksimalt tryk (Pa)  | 85     | 240    | 460    | 620    |
| Forbrug (W)  | 13     | 41     | 99     | 150    |
| Luftudtag  | 220x90 | 220x90 | 220x90 | 220x90 |

## KAPACITET / TRYK

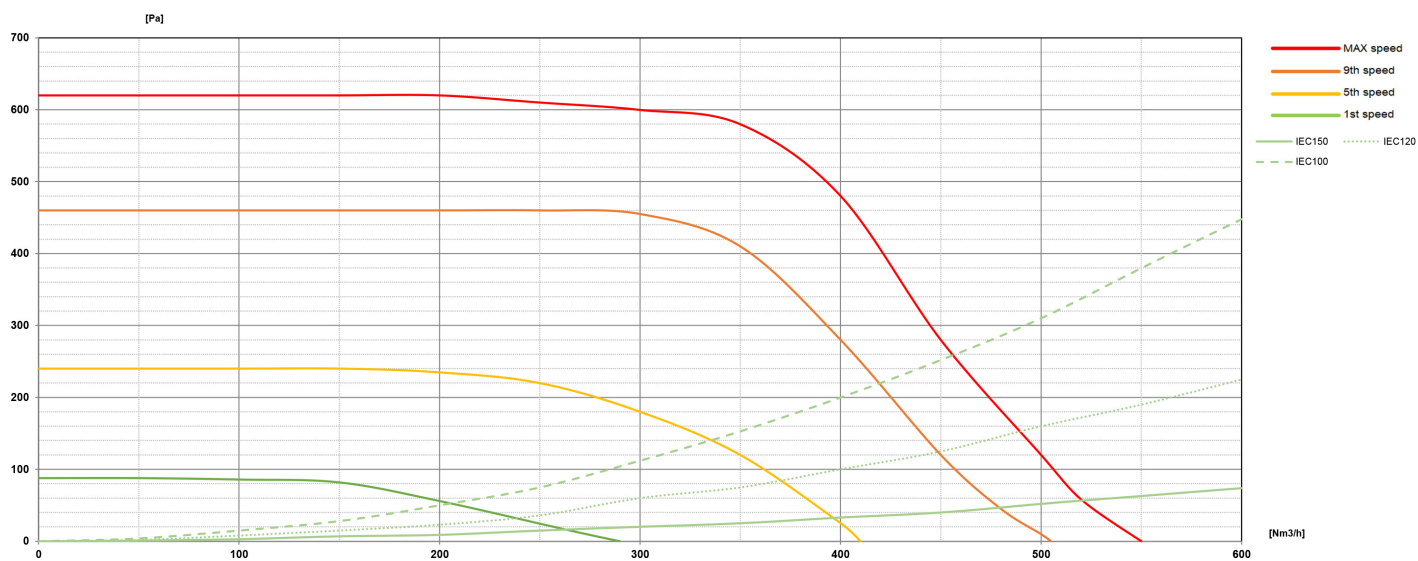

## SINTESI


01SINTESI-90 Bordemfang  
Sintesi - 600 m<sup>3</sup>/h

### Sortiment

Bordemhætte

### EAN Kode

8034122358918

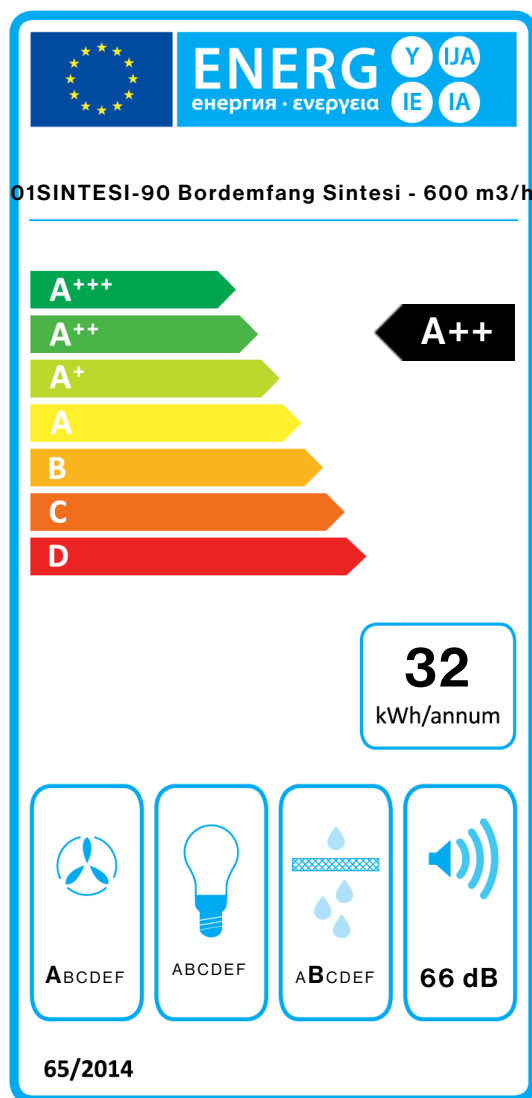

| PF         |   |                   |
|------------|---|-------------------|
| S          | Falmec Spa  |                   |
| M          | 01SINTESI-90 Bordemfang Sintesi - 600 m <sup>3</sup> /h |                   |
| AEC        | 31,5  | kWh/a             |
| EEC        | A++   |                   |
| FDE        | 37,7  |                   |
| FDEC       | A   |                   |
| LE         | 0,0   |                   |
| LEC        |   |                   |
| GFE        | 87,0  |                   |
| GFEC       | B   |                   |
| Qmin       | 260,0   | m <sup>3</sup> /h |
| Qmax       | 480,0   | m <sup>3</sup> /h |
| Qboost     | 520,0   | m <sup>3</sup> /h |
| SPEmin     | 48  | dBa               |
| SPEmax     | 66  | dBa               |
| SPEboost   | 69  | dBa               |
| PO         | -   | W                 |
| PS         | 0,48  | W                 |
| PI         |   |                   |
| F          | 0.6   |                   |
| EEI        | 33,3  |                   |
| Qbep       | 312,0   | m <sup>3</sup> /h |
| Pbep       | 627   | Pa                |
| Qboost     | 520,0   | m <sup>3</sup> /h |
| Wbep       | 144,0   | W                 |
| WL         | 0,00  | W                 |
| Emiddle    | 0   | lux               |
| Lwa-SPEmax | 66  | dBa               |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.