

## SINTESI

### Version

Sintesi - 600 m<sup>3</sup>/h

### Collection

Cooking systems

### EAN code

8034122358918



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**4 cooking zones with automatic pots recognition**  
**Residual heat indicators**  
**Keep warm function: maximum temperature 70°**  
**9 cooking levels + Power function (Over Boost)**  
**Pot detector sensor**  
**Timer / minute minder**  
**Safety switch-off / safety lock function**  
**Pause function**  
**Flex Surface technology**  
**Double Bridge Function**  
**Automatic shut-off timer**  
**Power management system on three levels: 2.8 kw, 3.5 kw, 7.4 kw**  
**Brushless Motor**  
**Touch control with LED display**  
**Carbon.Zeo/Metallic filter maintenance warning**

## OPTIONAL ACCESSORIES

### KACL.930

Kit filters Carbon.Zeo

### KACL.931

Filters Carbon.Zeo - Spare

### KACL.951

KACL.951 Underbase Slim filter unit (h60mm)

### KACL.952

Filter replacement (underbase Slim filter unit - h60mm)

### KACL.955

Base grid (underbase Slim filter unit - h60mm)

## TECHNICAL FEATURES

### Installation type

Worktop

### Dimensions

88x51 cm

### Finishing

Schott black glass  
Stainless steel frame

### Motor

600 m<sup>3</sup>/h

### Type of control

Touch control

### Speed settings

9

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

35.2 kg

### Net weight

28.8 kg

### Volumes

0.28 m<sup>3</sup>

### Packaging size

Length

980 mm

Height

365 mm

Depth

780 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

7560 W

### Voltage

220-240V

### Frequency

50-60Hz

### ENERGY CLASS

A++

## SINTESI

### Version





Sintesi - 600 m3/h

### Collection

Cooking systems

### EAN code

8034122358918



*Drawers measurements*

*Side view*

## SINTESI

### Version

Sintesi - 600 m3/h


### Collection

Cooking systems

### EAN code

8034122358918

## ENERGY LABEL

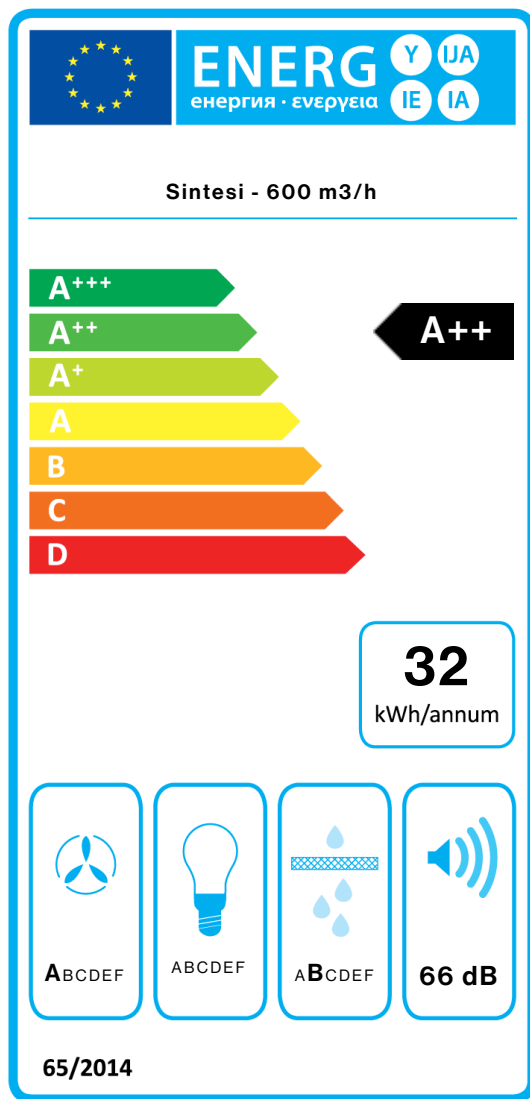

PF		
S	Falmec Spa	
M	Sintesi - 600 m3/h	
AEC	31,5	kWh/a
EEC	A++	
FDE	37,7	
FDEC	A	
LE	0,0	
LEC		
GFE	87,0	
GFEC	B	
Qmin	260,0	m³/h
Qmax	480,0	m³/h
Qboost	520,0	m³/h
SPEmin	48	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.6	
EEL	33,3	
Qbep	312,0	m³/h
Pbep	627	Pa
Qboost	520,0	m³/h
Wbep	144,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	66	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.