

## VERSO

### Version

White - 85 cm - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122358765



The photograph is purely for information  
It may not correspond to the selected version.

## FEATURES

Tempered glass  
Touch control + 24 h function  
LED lighting  
Metallic grease filter,  
removable and washable  
Optional combined regenaleble  
Carbon.Zeo filter  
Charcoal filter included  
Possible to duct wall mounted  
from rear  
Optional Chimney

## OPTIONAL ACCESSORIES

### KACL.770#41F

Remote under-roof 1100 m<sup>3</sup>/h  
Brushless

### KACL.786#41F

Outdoor extractor fan 1000  
m<sup>3</sup>/h

### KACL.796#4AF

Outdoor extractor fan 1500 m<sup>3</sup>/h

### KACL.797#4AF

Remote under-roof motor 1300  
m<sup>3</sup>/h

### KACL.798#41F

Remote under-roof motor 950  
m<sup>3</sup>/h

### KACL.941

External filter unit for sloped  
hoods

### KCQAN.00#B

Optional Chimney (White)

## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

85 cm

### Finishing

White tempered glass

### Motor

800 m<sup>3</sup>/h

### Type of control

Touch control

### Speed settings

4

### Lighting

Led 2x1,2 W - 3200 K

### Charcoal filter

Round charcoal filter Ø170 mm -  
Type 6 (optional)

### Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

23.1 kg

### Net weight

18.7 kg

### Volumes

0.27 m<sup>3</sup>

### Packaging size

Length

995 mm

Height

450 mm

Depth

595 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Schuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

750 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

66 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)



510 Pa

### Max. motor power

224 W

## ENERGY CLASS

A



## VERSO

### Version

White - 85 cm - 800 m<sup>3</sup>/h

### Collection

Design


### EAN code

8034122358765

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	46	53	58	66
Capacity (m <sup>3</sup> /h) I.E.C.61591	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

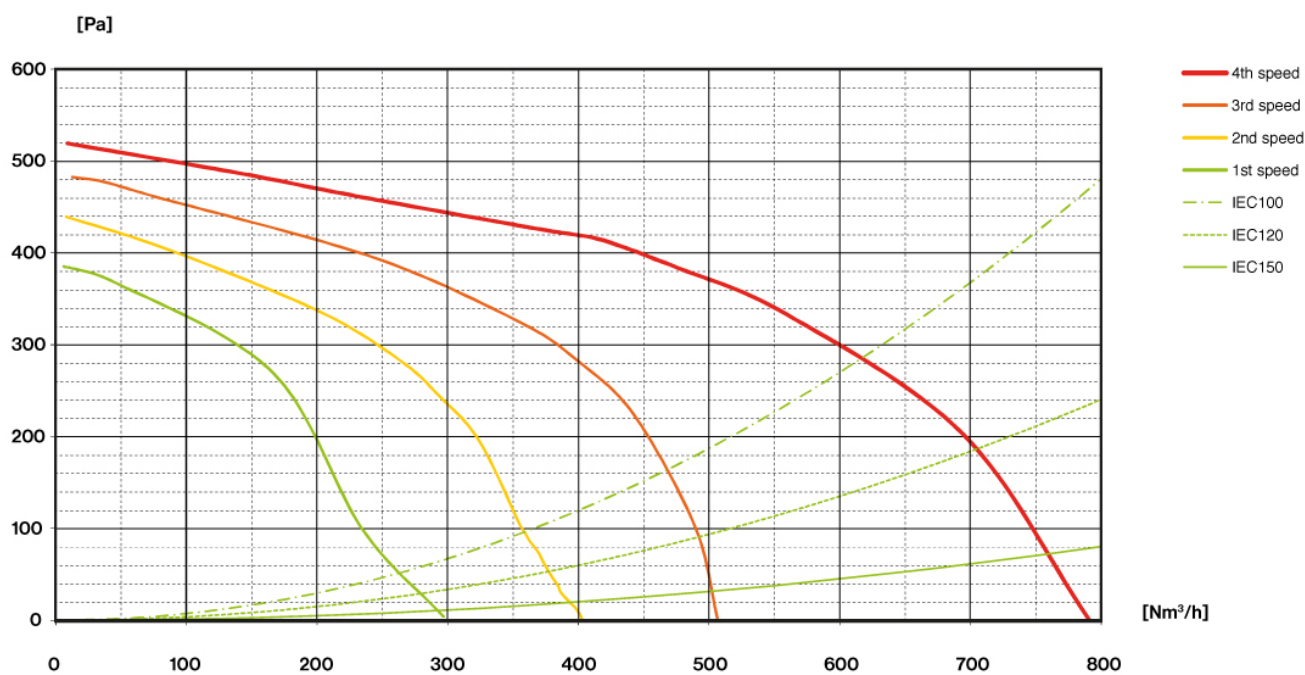

## VERSO

### Version

White - 85 cm - 800 m3/h


### Collection

Design

### EAN code

8034122358765

## ENERGY LABEL

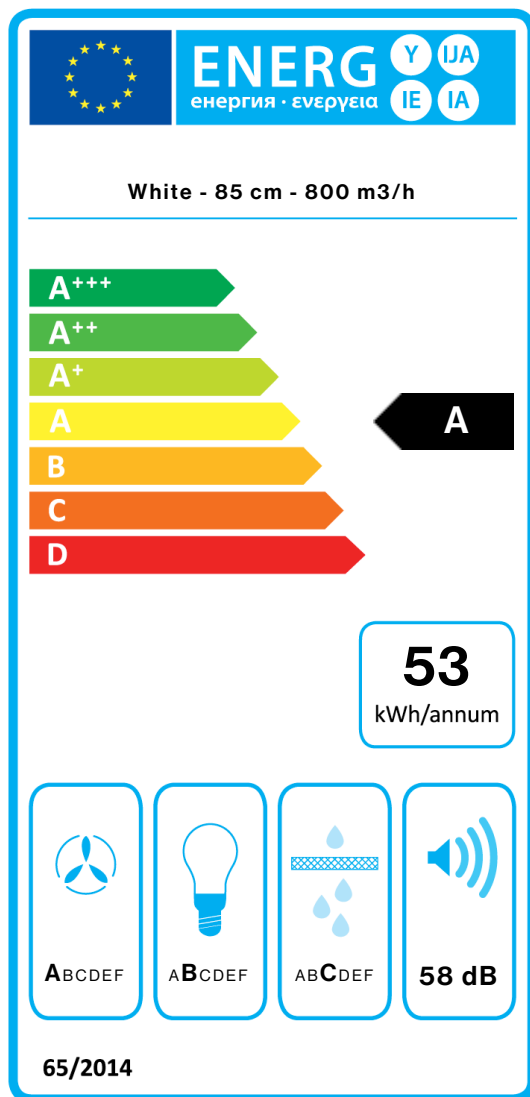

PF		
S	Falmec Spa	
M	White - 85 cm - 800 m3/h	
AEC	53,1	kWh/a
EEC	A	
FDE	31,6	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	295,0	m <sup>3</sup> /h
Qmax	500,0	m <sup>3</sup> /h
Qboost	750,0	m <sup>3</sup> /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEL	52,7	
Qbep	440,0	m <sup>3</sup> /h
Pbep	388	Pa
Qboost	750,0	m <sup>3</sup> /h
Wbep	150,0	W
WL	5,30	W
Emiddle	114	lex
Lwa-SPEmax	58	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.