

FLIPPER GREEN TECH

Version
Wall 85 cm - Satin Black - 800 m3/h

Collection
Design

EAN code
8034122101736



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

- Electronic control
- LED lighting
- Metallic grease filter, removable and washable
- Combined regenerable
- Carbon.Zeo filter (optional)
- Charcoal filter
- Remote control (optional)
- Possible to duct wall mounted from rear
- Optional Chimney
- Black tempered glass with steel central band
- Green Tech Motor

OPTIONAL ACCESSORIES

- 103050093**
Charcoal Filter Ø192mm
- 105080050**
Radio remote control
- KACL.941**
External Carbon.Zeo filter unit for sloped hoods
- KCQAN.00#I**
Chimney - Inox

TECHNICAL FEATURES

- Installation type**
Wall
- Dimensions**
85 cm
- Finishing**
Black glass satin finishing
Black tempered glass with Stainless Steel central band
- Motor**
800 m³/h
- Type of control**
Electronic control
- Speed**
3 + boost
- Lighting**
Led 2x1,2 W - 3200 K
- Charcoal filter**
Charcoal Filter Ø192mm (included)
- Minimum distance**
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES




- Gross weight**
30 kg
- Net weight**
25 kg
- Volumes**
0.27 m³
- Packaging size**
Length
950 mm
Height
440 mm
Depth
655 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
150 W
- Voltage**
220-240V
- Frequency**
50-60Hz

MOTOR TECHNICAL SHEET

- Maximum capacity**
670 m³/h
I.E.C. 61591
- Maximum noise level**
65 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
430 Pa
- Max. motor power**
130 W
- ENERGY CLASS**
A+++



FLIPPER GREEN TECH

Version
Wall 85 cm - Satin Black - 800
m3/h

Collection
Design

EAN code
8034122101736

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	45		58	65
Capacity (m3/h) I.E.C.61591	220		530	670
Maximum pressure (Pa)	170		330	430
Power (W)				130
Air outlet	150	150	150	150


FLIPPER GREEN TECH

Version
Wall 85 cm - Satin Black - 800 m3/h

Collection
Design

EAN code
8034122101736

ENERGY LABEL

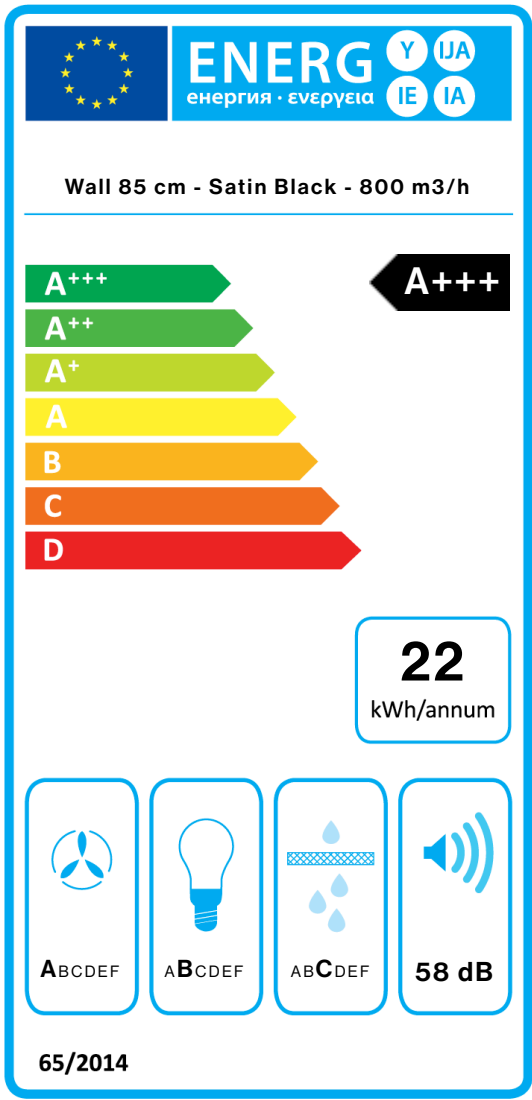

PF		
S	Falmec Spa	
M	Wall 85 cm - Satin Black - 800 m3/h	
AEC	21,8	kWh/a
EEC	A+++	
FDE	41,1	
FDEC	A	
LE	23,4	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	220,0	m³/h
Qmax	530,0	m³/h
Qboost	670,0	m³/h
SPEmin	45	dBa
SPEmax	58	dBa
SPEboost	65	dBa
PO	-	W
PS	0,48	W
PI		
F	0.5	
EEL	29,9	
Qbep	412,0	m³/h
Pbep	359	Pa
Qboost	670,0	m³/h
Wbep	100,0	W
WL	4,90	W
Emiddle	114	lux
Lwa-SPEmax	58	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.