falmec

FLIPPER GREEN TECH

Version
Wall 85 cm - Satin Black - 800 m3/h

Collection
Design

EAN code
8034122101736

Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

Electronic control
LED lighting
Metallic grease filter, removable and washable
Combined regenerable Carbon.Zeo filter (optional)
Charcoal filter
Remote control (optional)
Possible to duct wall mounted from rear
Optional Chimney
Black tempered glass with steel central band
Green Tech Motor

OPTIONAL ACCESSORIES

103050093
Charcoal Filter Ø192mm
105080050
Radio remote control
KACL.941
External Carbon.Zeo filter unit for sloped hoods
KCQAN.00#I
Chimney - Inox

TECHNICAL FEATURES

Installation type
Wall
Dimensions
85 cm
Finishing
Black glass satin finishing
Black tempered glass with Stainless Steel central band
Motor
800 m³/h
Type of control
Electronic control
Speed
3 + boost
Lighting
Led 2x1,2 W - 3200 K
Charcoal filter
Charcoal Filter Ø192mm (included)
Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
30 kg
Net weight
25 kg
Volumes
0.27 m³
Packaging size
Length
950 mm
Height
440 mm
Depth
655 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
150 W
Voltage
220-240V
Frequency
50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity
670 m³/h
I.E.C. 61591
Maximum noise level
65 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
430 Pa
Max. motor power
130 W
ENERGY CLASS
A+++







falmec

FLIPPER GREEN TECH

Version
Wall 85 cm - Satin Black - 800 m3/h

Collection
Design

EAN code
8034122101736

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	45		58	65
Capacity (m3/h) I.E.C.61591	220		530	670
Maximum pressure (Pa)	170		330	430
Power (W)				130
Air outlet	150	150	150	150

falmec

FLIPPER GREEN TECH

Version
Wall 85 cm - Satin Black - 800 m3/h

Collection
Design

EAN code
8034122101736

ENERGY LABEL

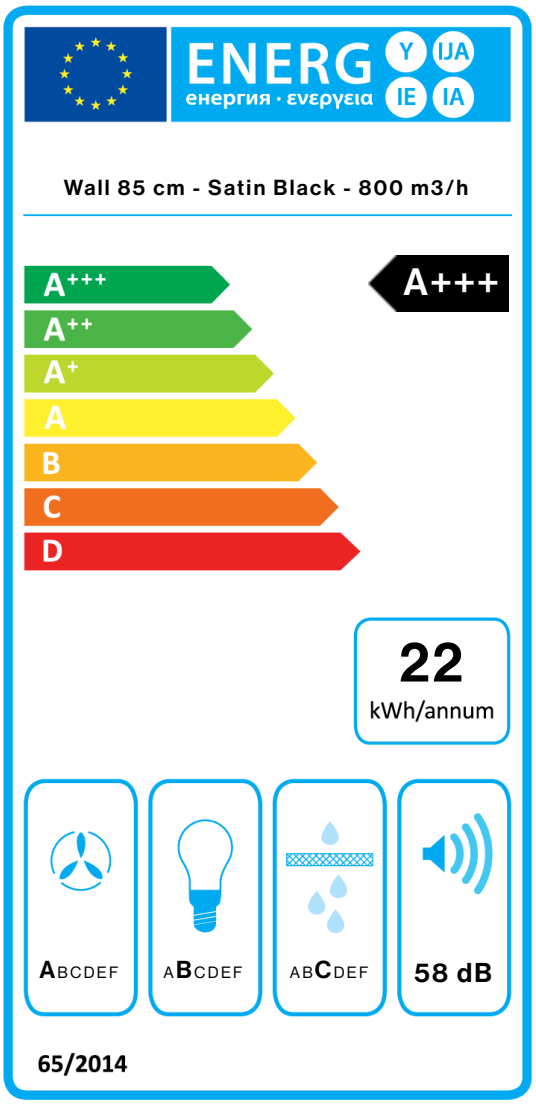

PF		
S	Falmec Spa	
M	Wall 85 cm - Satin Black - 800 m3/h	
AEC	21,8	kWh/a
EEC	A+++	
FDE	41,1	
FDEC	A	
LE	23,4	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	220,0	m³/h
Qmax	530,0	m³/h
Qboost	670,0	m³/h
SPEmin	45	dBa
SPEmax	58	dBa
SPEboost	65	dBa
PO	-	W
PS	0,48	W
PI		
F	0.5	
EEI	29,9	
Qbep	412,0	m³/h
Pbep	359	Pa
Qboost	670,0	m³/h
Wbep	100,0	W
WL	4,90	W
Emiddle	114	lux
Lwa-SPEmax	58	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.