

GRUPPO INCASSO GREEN
TECH

Version
Built-in 50 cm - 800 m3/h

Collection
Design

EAN code
8034122101743




The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Perimeter suction
- Electronic control
- Metallic grease filter, removable and washable
- Charcoal filter included
- Optional remote control
- Dynamic LED Light (2700K - 5600K)
- Green Tech Motor

OPTIONAL ACCESSORIES

- KACL.815
Protective cleaning cloths for stainless steel (box 10 pcs)
103050093
- Charcoal Filter Ø192mm
105080053
- Remote control



TECHNICAL FEATURES

- Installation type
Built-in
- Dimensions
50 cm
- Finishing
Scotch brite stainless steel (AISI 304)
- Motor
800 m³/h
- Type of control
Electronic control
- Speed settings
4
- Lighting
Led
- Charcoal filter
Charcoal Filter Ø192mm (included)
- Minimum distance
Gas hob: 62 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND
VOLUMES

- Gross weight
9.8 kg
- Net weight
7.9 kg
- Volumes
0.09 m³
- Packaging size
Length
610 mm
Height
380 mm
Depth
375 mm

CONSUMPTION AND
CONNECTION FEATURES

- Maximum consumption
150 W
- Voltage
220-240V
- Frequency
50-60Hz

MOTOR TECHNICAL SHEET

- Maximum capacity
620 m³/h
I.E.C. 61591
- Maximum noise level
66 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)
430 Pa
- Max. motor power
130 W
- ENERGY CLASS
A+

GRUPPO INCASSO GREEN
TECH

Version
Built-in 50 cm - 800 m3/h

Collection
Design

EAN code
8034122101743

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	47		61	66
Capacity (m3/h) I.E.C.61591	205		500	620
Maximum pressure (Pa)	170		330	430
Motor Power (W)				130
Air outlet	150	150	150	150


GRUPPO INCASSO GREEN
TECH

Version
Built-in 50 cm - 800 m3/h

Collection
Design

EAN code
8034122101743

ENERGY LABEL

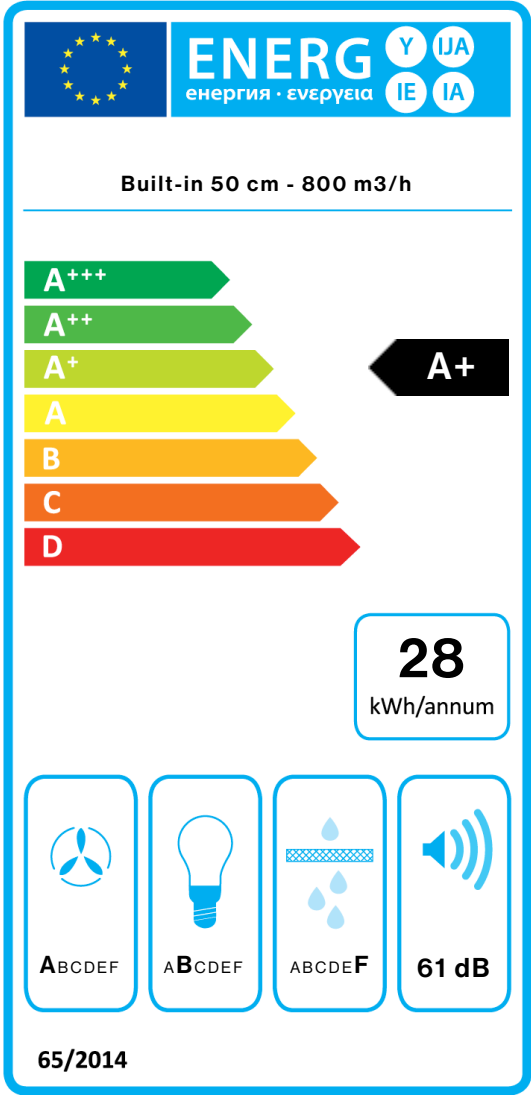

PF		
S	Falmec Spa	
M	Built-in 50 cm - 800 m3/h	
AEC	27,9	kWh/a
EEC	A+	
FDE	36,5	
FDEC	A	
LE	27,9	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	205,0	m³/h
Qmax	500,0	m³/h
Qboost	620,0	m³/h
SPEmin	47	dBa
SPEmax	61	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.7	
EEL	39,9	
Qbep	353,0	m³/h
Pbep	350	Pa
Qboost	620,0	m³/h
Wbep	94,0	W
WL	5,30	W
Emiddle	148	lex
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.