

GRUPPO INCASSO GREEN TECH

Version

Built-in 50 cm - 800 m3/h

Collection

Design

EAN code

8034122101743



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Perimeter suction
Electronic control
Metallic grease filter,
removable and washable
Charcoal filter included
Optional remote control
Dynamic LED Light (2700K -
5600K)
Green Tech Motor

OPTIONAL ACCESSORIES

KACL.770#41F
Remote under-roof 1100 m3/h
Brushless

KACL.786#41F
Outdoor extractor fan 1000
m3/h

KACL.796#4AF
Outdoor extractor fan 1500 m3/h

KACL.797#4AF
Remote under-roof motor 1300
m3/h

KACL.798#41F
Remote under-roof motor 950
m3/h

KACL.815
Protective cleaning cloths for
stainless steel (box 10 pcs)
103050093
Charcoal Filter Ø192mm
105080053
Remote control

TECHNICAL FEATURES

Installation type
Built-in

Dimensions
50 cm

Finishing
Scotch brite stainless steel (AISI
304)

Motor
800 m³/h

Type of control
Electronic control

Speed settings
4

Lighting
Led

Minimum distance
Gas hob: 62 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
9.8 kg

Net weight
7.9 kg

Volumes
0.09 m³

Packaging size
Length
610 mm
Height
380 mm
Depth
375 mm


CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
150 W

Voltage
220-240V

Frequency
50-60Hz

ENERGY CLASS
A+



GRUPPO INCASSO GREEN TECH

Version

Built-in 50 cm - 800 m3/h


Collection

Design

EAN code

8034122101743

ENERGY LABEL

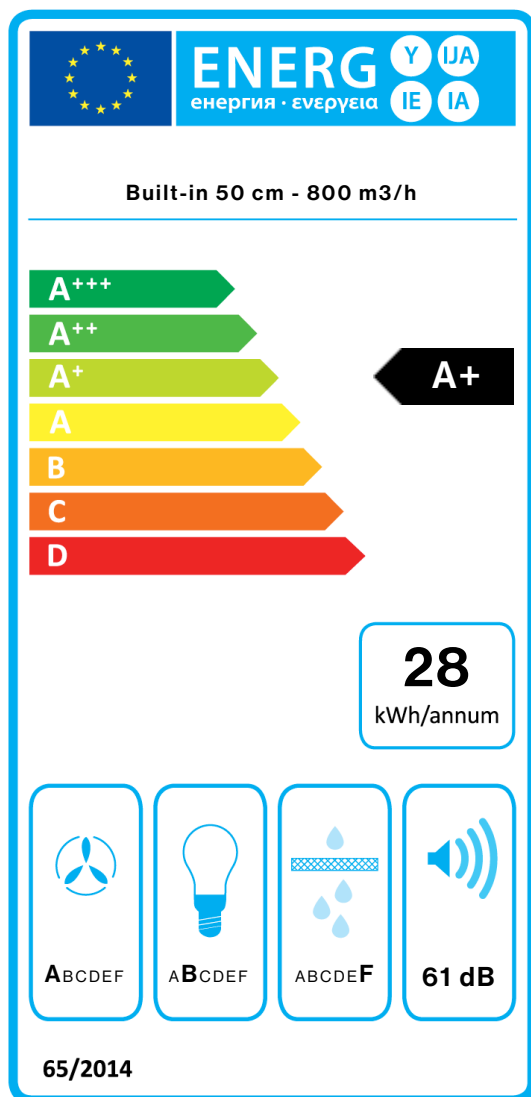

| PF | | |
|------------|---------------------------|-------------------|
| S | Falmec Spa | |
| M | Built-in 50 cm - 800 m3/h | |
| AEC | 27,9 | kWh/a |
| EEC | A+ | |
| FDE | 36,5 | |
| FDEC | A | |
| LE | 27,9 | |
| LEC | B | |
| GFE | 53,0 | |
| GFEC | F | |
| Qmin | 205,0 | m ³ /h |
| Qmax | 500,0 | m ³ /h |
| Qboost | 620,0 | m ³ /h |
| SPEmin | 47 | dBa |
| SPEmax | 61 | dBa |
| SPEboost | 66 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 0.7 | |
| EEL | 39,9 | |
| Qbep | 353,0 | m ³ /h |
| Pbep | 350 | Pa |
| Qboost | 620,0 | m ³ /h |
| Wbep | 94,0 | W |
| WL | 5,30 | W |
| Emiddle | 148 | lux |
| Lwa-SPEmax | 61 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.