

MOVE GREEN TECH

Version
Built-in 90 cm - White - 800 m3/h

Collection
Design

EAN code
8034122101828



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Sliding door
- Electronic control
- Metallic grease filter, removable and washable
- Optional combined regenerable Carbon.Zeo filter
- Optional Chimney
- Optional glass shelf
- Dimmable led lighting
- Dynamic LED Light (2700K - 5600K)
- Green Tech Motor

Availability Carbon.Zeo filter
KACL.961 for hoods produced from 02.05.2021.
Dimmable led lighting from 11.07.23

OPTIONAL ACCESSORIES

- KACL.107**
Glass shelf 90 cm
- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)
- KACL.934**
Carbon.Zeo filters
- KACL.961**
Charcoal and Zeolite filter
- KCVJN.00#3**
Telescopic chimney h 185 + h 185
- KCVJN.01#3**
Kit Chimney Virgola-Move H120
Stainless Steel
- 103050093**
Charcoal Filter Ø192mm

TECHNICAL FEATURES

- Installation type**
Built-in
- Dimensions**
90 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
Lower part in white tempered glass
- Motor**
800 m³/h
- Type of control**
Electronic control
- Speed settings**
4
- Lighting**
Led 3x1,2 W - 2700 K / 5600 K
- Charcoal filter**
Charcoal and Zeolite filter (optional)
- Minimum distance**
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES




- Gross weight**
20.2 kg
- Net weight**
16.8 kg
- Volumes**
0.19 m³
- Packaging size**
Length 995 mm
Height 410 mm
Depth 465 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
150 W
- Voltage**
220-240V
- Frequency**
50-60Hz

MOTOR TECHNICAL SHEET

- Maximum capacity**
640 m³/h
I.E.C. 61591
- Maximum noise level**
67 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
430 Pa
- Max. motor power**
130 W
- ENERGY CLASS**
A++



MOVE GREEN TECH

Version
Built-in 90 cm - White - 800
m3/h

Collection
Design

EAN code
8034122101828

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	48		62	67
Capacity (m3/h) I.E.C.61591	210		510	640
Maximum pressure (Pa)	170		330	430
Motor Power (W)				130
Air outlet	150	150	150	150


MOVE GREEN TECH

Version
Built-in 90 cm - White - 800 m3/h

Collection
Design

EAN code
8034122101828

ENERGY LABEL

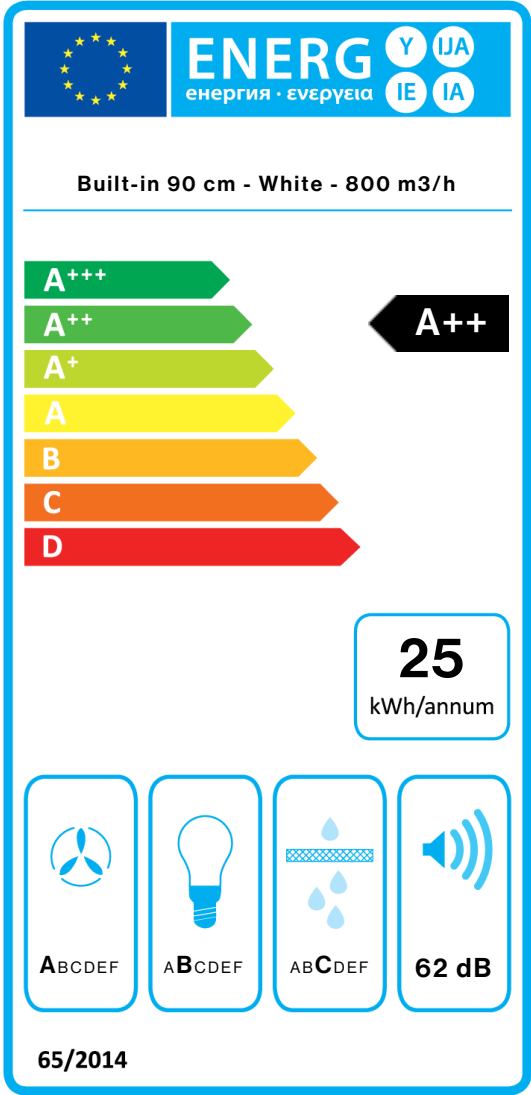

PF		
S	Falmec Spa	
M	Built-in 90 cm - White - 800 m3/h	
AEC	24,5	kWh/a
EEC	A++	
FDE	37,7	
FDEC	A	
LE	20,7	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	210,0	m³/h
Qmax	510,0	m³/h
Qboost	640,0	m³/h
SPEmin	48	dBa
SPEmax	62	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	0.6	
EEL	35,8	
Qbep	358,0	m³/h
Pbep	341	Pa
Qboost	640,0	m³/h
Wbep	90,0	W
WL	6,50	W
Emiddle	134	lex
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.