

QUASAR GREEN TECH

Version

Wall 90 cm - Black - 800 m3/h

Collection

Design

EAN code

8034122101811



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Perimeter suction
Touch control + 24 h function
LED lighting
Metallic grease filter, removable and washable
Charcoal filter included
Possible to duct wall mounted from rear
Optional Chimney
Green Tech Motor

OPTIONAL ACCESSORIES

KACL.770#41F
Remote under-roof 1100 m3/h
Brushless

KACL.786#41F
Outdoor extractor fan 1000 m3/h

KACL.796#4AF
Outdoor extractor fan 1500 m3/h

KACL.797#4AF
Remote under-roof motor 1300 m3/h

KACL.798#41F
Remote under-roof motor 950 m3/h

KACL.815
Protective cleaning cloths for stainless steel (box 10 pcs)

KACL.941
External filter unit for sloped hoods

KCQAN.00#I
Chimney (Inox)
103050093
Charcoal Filter Ø192mm

TECHNICAL FEATURES

Installation type
Wall

Dimensions
90 cm

Finishing
Scotch brite stainless steel (AISI 304)
Black tempered glass finishing

Motor
800 m³/h

Type of control
Touch control

Speed settings
4

Lighting
Led 3x1,2 W - 3200 K

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
39 kg

Net weight
33 kg

Volumes
0.42 m³

Packaging size
Length
1035 mm
Height
560 mm
Depth
740 mm



CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
150 W

Voltage
220-240V

Frequency
50-60Hz

ENERGY CLASS
A+++

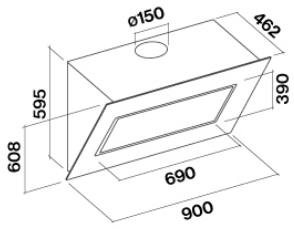

QUASAR GREEN TECH

Version

Wall 90 cm - Black - 800 m3/h


Collection

Design

EAN code

8034122101811

ENERGY LABEL

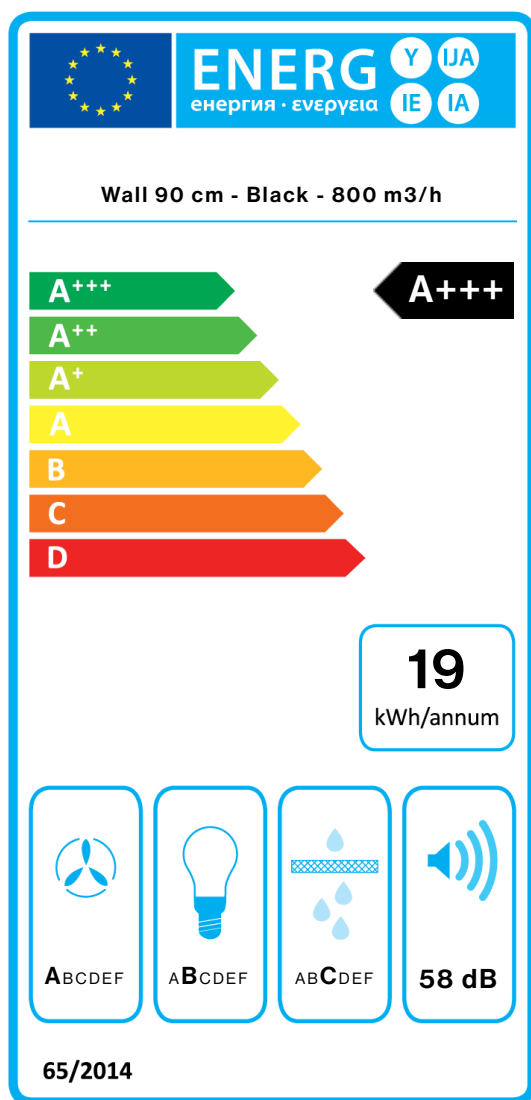

PF		
S	Falmec Spa	
M	Wall 90 cm - Black - 800 m3/h	
AEC	18,9	kWh/a
EEC	A+++	
FDE	43,1	
FDEC	A	
LE	20,7	
LEC	B	
GFE	76,0	
GFEC	C	
Qmin	220,0	m ³ /h
Qmax	530,0	m ³ /h
Qboost	670,0	m ³ /h
SPEmin	45	dBa
SPEmax	58	dBa
SPEboost	65	dBa
PO	-	W
PS	0,48	W
PI		
F	0.4	
EEL	26,2	
Qbep	409,0	m ³ /h
Pbep	368	Pa
Qboost	670,0	m ³ /h
Wbep	97,0	W
WL	6,50	W
Emiddle	134	lux
Lwa-SPEmax	58	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.