

VIRGOLA NO-DROP

Version  
Built-in - 60 cm - 800 m3/h

Collection  
Design

EAN code  
8034122359588

FEATURES

Glass panel  
Electronic control  
Metallic grease filter,  
removable and washable  
Optional charcoal filter  
Optional Chimney  
Dynamic LED Light (2700K -  
5600K)  
No-Drop patented anti-  
condensation system

OPTIONAL ACCESSORIES

**KACL.770#41F**  
Remote under-roof 1100 m3/h  
Brushless  
**KACL.786#41F**  
Outdoor extractor fan 1000  
m3/h  
**KACL.796#4AF**  
Outdoor extractor fan 1500 m3/h  
**KACL.797#4AF**  
Remote under-roof motor 1300  
m3/h  
**KACL.798#41F**  
Remote under-roof motor 950  
m3/h  
**KACL.954**  
Cellular charcoal filter (for  
Virgola No-Drop hoods  
<08/06/2020)  
**KCVJN.00#3**  
Telescopic chimney h 185 + h 185  
**KCVJN.01#3**  
Chimney h 120 mm

TECHNICAL FEATURES

Installation type  
Built-in  
Dimensions  
60 cm  
Finishing  
Scotch brite stainless steel  
Motor  
800 m³/h  
Type of control  
Electronic control  
Speed settings  
4  
Lighting  
Led 2x1,2 W - 2700 K / 5600 K  
Minimum distance  
Gas hob: 52 cm  
Electric hob: 52 cm

PACKAGING:WEIGHTS AND  
VOLUMES


Gross weight  
15.2 kg  
Net weight  
12.3 kg  
Volumes  
0.13 m³  
Packaging size  
Length  
705 mm  
Height  
410 mm  
Depth  
465 mm

CONSUMPTION AND  
CONNECTION FEATURES

Maximum consumption  
280 W  
Voltage  
220-240V  
Frequency  
50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity  
670 m³/h  
I.E.C. 61591  
Maximum noise level  
67 dB(A)re1pW  
I.E.C.60704-2-13  
Maximum pressure (Pa)  
500 Pa  
Max. motor power  
215 W  
ENERGY CLASS  
B



VIRGOLA NO-DROP

Version  
Built-in - 60 cm - 800 m3/h


Collection  
Design

EAN code  
8034122359588

MOTOR TECHNICAL SHEET

| Motor speed                                | 1   | 2   | 3   | 4   |
|--------------------------------------------|-----|-----|-----|-----|
| Noise level<br>dB(A)re1pW-I.E.C.60704-2-13 | 49  | 55  | 61  | 67  |
| Capacity (m3/h)<br>I.E.C.61591             | 270 | 360 | 470 | 670 |
| Maximum pressure (Pa)                      | 390 | 420 | 460 | 500 |
| Motor Power (W)                            | 134 | 156 | 180 | 215 |
| Air outlet                                 | 150 | 150 | 150 | 150 |

CAPACITY / PRESSURE

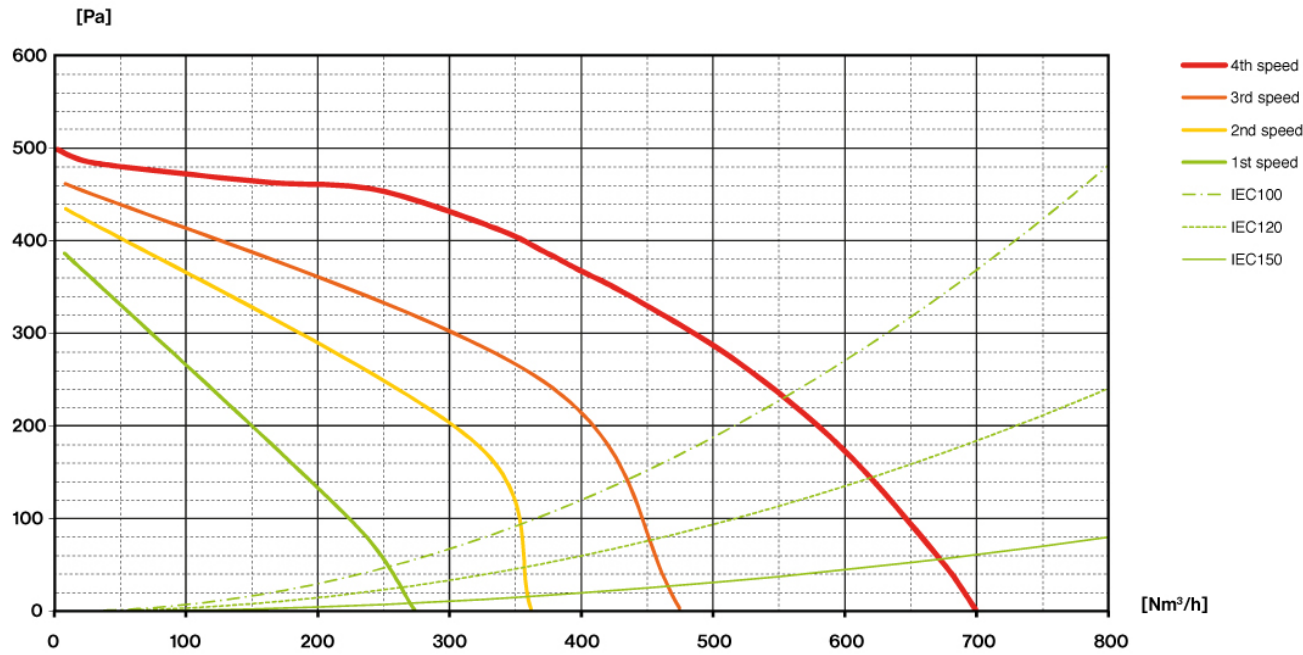


VIRGOLA NO-DROP

Version  
Built-in - 60 cm - 800 m3/h

Collection  
Design

EAN code  
8034122359588

ENERGY LABEL

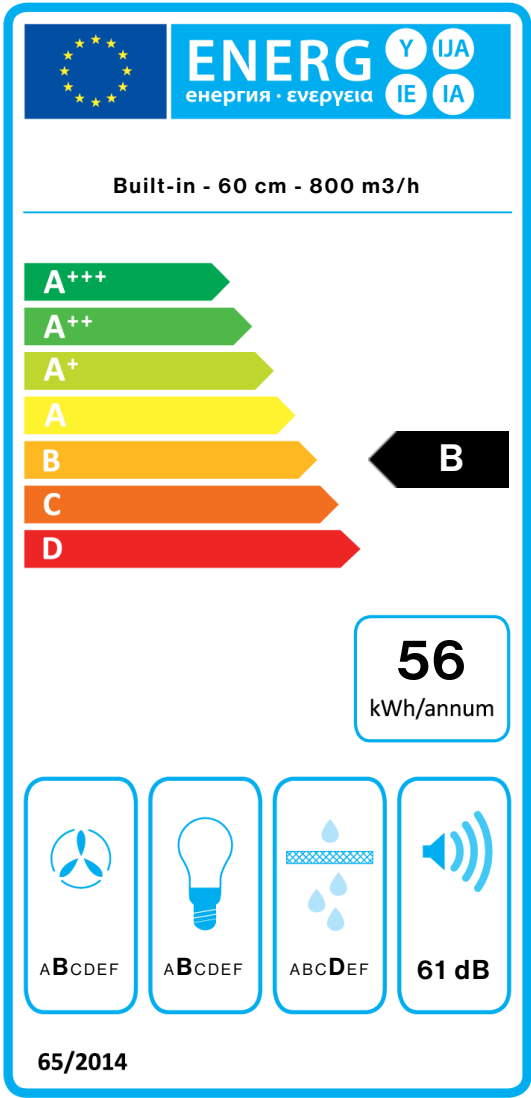

| PF         |                             |       |
|------------|-----------------------------|-------|
| S          | Falmec Spa                  |       |
| M          | Built-in - 60 cm - 800 m3/h |       |
| AEC        | 55,7                        | kWh/a |
| EEC        | B                           |       |
| FDE        | 26,4                        |       |
| FDEC       | B                           |       |
| LE         | 27,9                        |       |
| LEC        | B                           |       |
| GFE        | 70,0                        |       |
| GFEC       | D                           |       |
| Qmin       | 250,0                       | m³/h  |
| Qmax       | 480,0                       | m³/h  |
| Qboost     | 620,0                       | m³/h  |
| SPEmin     | 49                          | dBa   |
| SPEmax     | 61                          | dBa   |
| SPEboost   | 66                          | dBa   |
| PO         | -                           | W     |
| PS         | 0,48                        | W     |
| PI         |                             |       |
| F          | 1                           |       |
| EEL        | 57,8                        |       |
| Qbep       | 364,0                       | m³/h  |
| Pbep       | 371                         | Pa    |
| Qboost     | 620,0                       | m³/h  |
| Wbep       | 142,0                       | W     |
| WL         | 5,30                        | W     |
| Emiddle    | 148                         | lex   |
| Lwa-SPEmax | 61                          | dBa   |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximun air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.