

## GRUPPO BLACK

01GRU-80-B - Gruppo Murano  
Black 80

### Sortiment

Design

### EAN Kode

8034122358628



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

**Touch control og 24 t. funktion**  
**Vaskbare rustfrie fedtfiltere**  
**Kulfilter**  
**Fjernbetjening i tillæg**  
**Randsug med tempereret glaspanel**  
**Dynamic LED Light (2700K - 5600K)**

## MULIGHEDER FOR TILVALG

**01KU-6**  
Rundt kulfilter Ø170 mm. Type 6

**01KU-934**  
Kul / zeolitfilter

**01MO-GAVL**  
Gavlmotor til udendørs brug  
1000 m<sup>3</sup>/h

**01MO-GAVL-15**  
Gavlmotor til udendørs brug  
1500 m<sup>3</sup>/h

**01MO-LOFT**  
Loftmotorer under taget 950 m<sup>3</sup>/h

**01MO-LOFT-13**  
Loftmotor 1300 m<sup>3</sup> Ø200 mm

**101079910**  
Metallfiltre - Base - 204x207 mm

**KACL.770#41F**  
Loftmotorer 1100 m<sup>3</sup>/h  
Brushless

**KACL.950**  
Filter unit for built-in hoods

## TEKNISK BESKRIVELSE

**Installation**  
Integreret emhætte

**Dimensioner**  
70 cm

**Materiale**  
Sort tempereret glas  
Sortlakeret stål

**Motor**  
800 m<sup>3</sup>/h

**Betjening**  
Betjening med touch

**Hastighed**  
3 + boost

**Belysning**  
Led 2x1,2 W - 2700 K / 5600 K

**Filter**  
Metallfiltre - Base - 204x207 mm

**Kulfilter**  
Rundt kulfilter Ø170 mm. Type 6 (Medfølger)

**Minimumsafstand**  
Gaskomfur: 62 cm  
Kogeplade: 52 cm

## EMBALLAGE: VÆGT OG VOLUMEN

**Bruttovægt**  
12.8 kg

**Nettovægt**  
10.2 kg

**Volumen**  
0.12 m<sup>3</sup>

**Mål på emballage**

Længde  
855 mm

Højde  
380 mm

Dybde  
375 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

**Maksimalt forbrug**  
280 W

**Spænding**  
220-240V

**Frekvens**  
50-60Hz

Shuko

## DATABLAD MOTOR


**Maksimal kapacitet**  
670 m<sup>3</sup>/h  
I.E.C. 61591

**Maksimalt støjniveau**  
67 dB(A)<sub>re1pW</sub>  
I.E.C.60704-2-13

**Maksimalt tryk (Pa)**  
500 Pa

**Maksimal sugestyrke**  
215 W

**ENERGIKLASSE**  
B

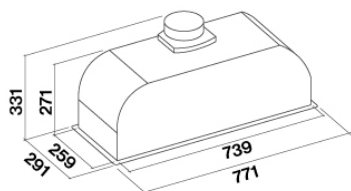

## GRUPPO BLACK

01GRU-80-B - Gruppo Murano  
Black 80

### Sortiment

Design


### EAN Kode

8034122358628

## DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	49	55	61	67
Kapacitet (m <sup>3</sup> /h) I.E.C.61591	270	360	470	670
Maksimalt tryk (Pa)	390	420	460	500
Forbrug (W)	134	156	180	215
Luftudtag	150	150	150	150

## KAPACITET / TRYK

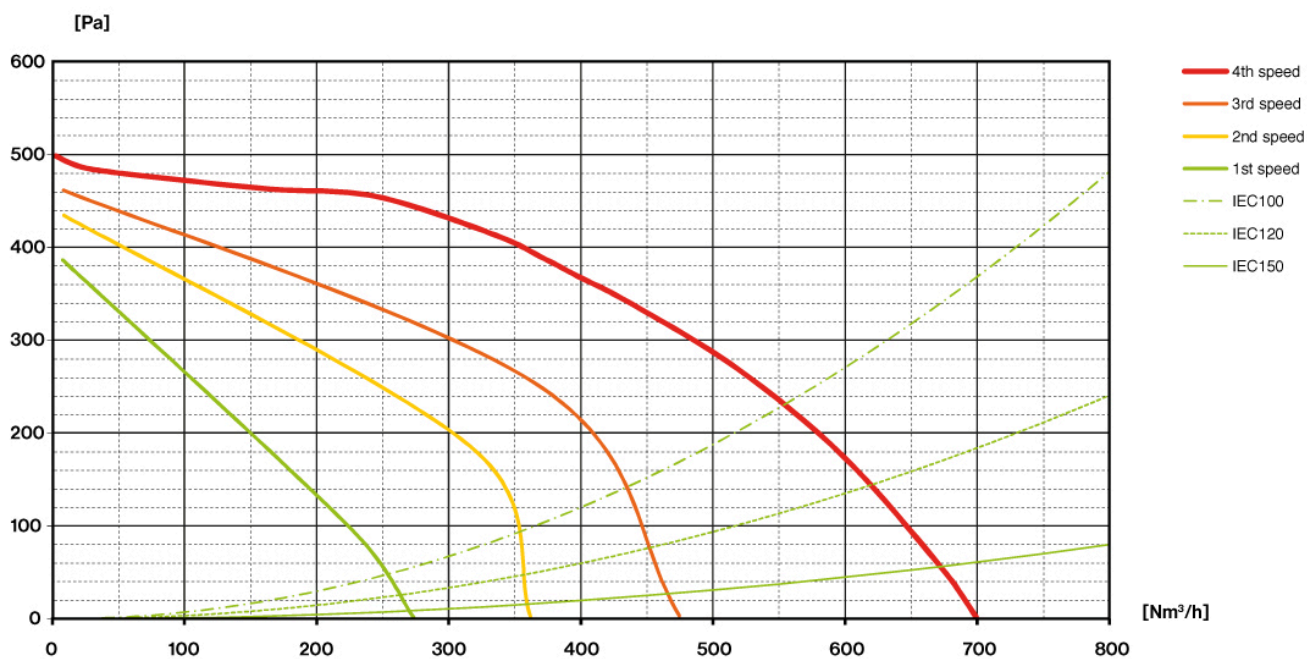

## GRUPPO BLACK


01GRU-80-B - Gruppo Murano  
Black 80

### Sortiment

Design

### EAN Kode

8034122358628

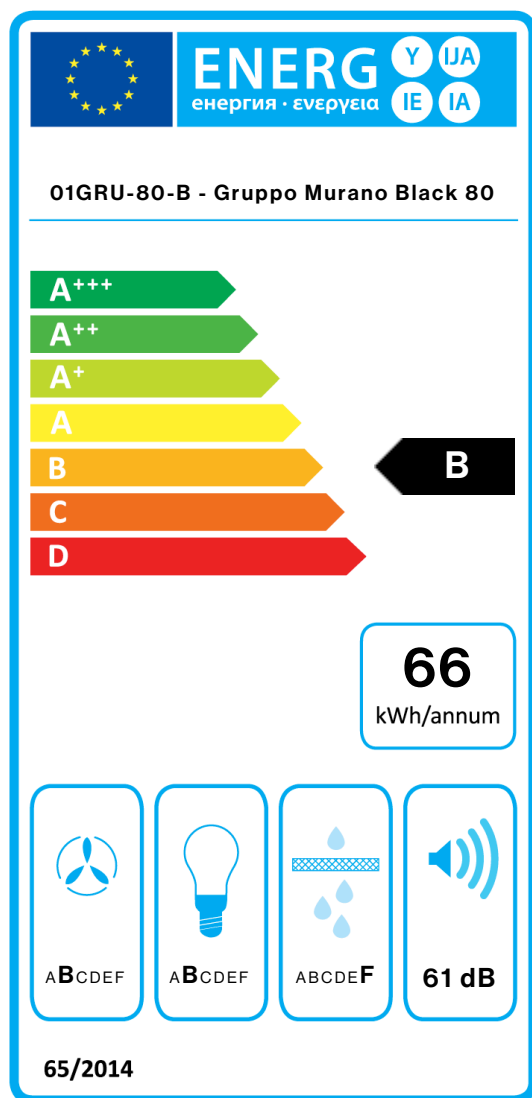

PF		
S	Falmec Spa	
M	01GRU-80-B - Gruppo Murano Black 80	
AEC	65,9	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	21,6	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	270,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	670,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEI	64,9	
Qbep	333,0	m <sup>3</sup> /h
Pbep	407	Pa
Qboost	670,0	m <sup>3</sup> /h
Wbep	147,7	W
WL	9,00	W
Emiddle	190	lux
Lwa-SPEmax	61	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.