

GRUPPO BLACK

01GRU-80-B - Gruppo Murano
Black 80

Sortiment

Design

EAN Kode

8034122358628



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Touch control og 24 t. funktion
Vaskbare rustfrie fedtfiltere
Kulfilter
Fjernbetjening i tillæg
Randsug med tempereret glaspanel
Dynamic LED Light (2700K - 5600K)

MULIGHEDER FOR TILVALG

01KU-6
Rundt kulfilter Ø170 mm. Type 6

01KU-934
Kul / zeolitfilter

01MO-GAVL
Gavlmotor til udendørs brug
1000 m³/h

01MO-GAVL-15
Gavlmotor til udendørs brug
1500 m³/h

01MO-LOFT
Loftmotorer under taget 950 m³/h

01MO-LOFT-13
Loftmotor 1300 m³ Ø200 mm

101079910
Metallfiltre - Base - 204x207 mm

KACL.770#41F
Loftmotorer 1100 m³/h
Brushless

KACL.950
Filter unit for built-in hoods

TEKNISK BESKRIVELSE

Installation
Integreret emhætte

Dimensioner
70 cm

Materiale
Sort tempereret glas
Sortlakeret stål

Motor
800 m³/h

Betjening
Betjening med touch

Hastighed
3 + boost

Belysning
Led 2x1,2 W - 2700 K / 5600 K

Filter
Metallfiltre - Base - 204x207 mm

Kulfilter
Rundt kulfilter Ø170 mm. Type 6 (Medfølger)

Minimumsafstand
Gaskomfur: 62 cm
Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt
12.8 kg

Nettovægt
10.2 kg

Volumen
0.12 m³

Mål på emballage

Længde
855 mm

Højde
380 mm

Dybde
375 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug
280 W

Spænding
220-240V

Frekvens
50-60Hz

Shuko

DATABLAD MOTOR


Maksimal kapacitet
670 m³/h
I.E.C. 61591

Maksimalt støjniveau
67 dB(A)_{re1pW}
I.E.C.60704-2-13

Maksimalt tryk (Pa)
500 Pa

Maksimal sugestyrke
215 W

ENERGIKLASSE
B

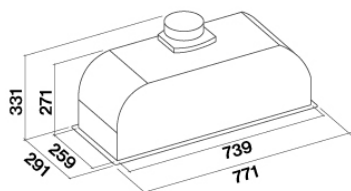

GRUPPO BLACK

01GRU-80-B - Gruppo Murano
Black 80

Sortiment

Design


EAN Kode

8034122358628

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	49	55	61	67
Kapacitet (m ³ /h) I.E.C.61591	270	360	470	670
Maksimalt tryk (Pa)	390	420	460	500
Forbrug (W)	134	156	180	215
Luftudtag	150	150	150	150

KAPACITET / TRYK

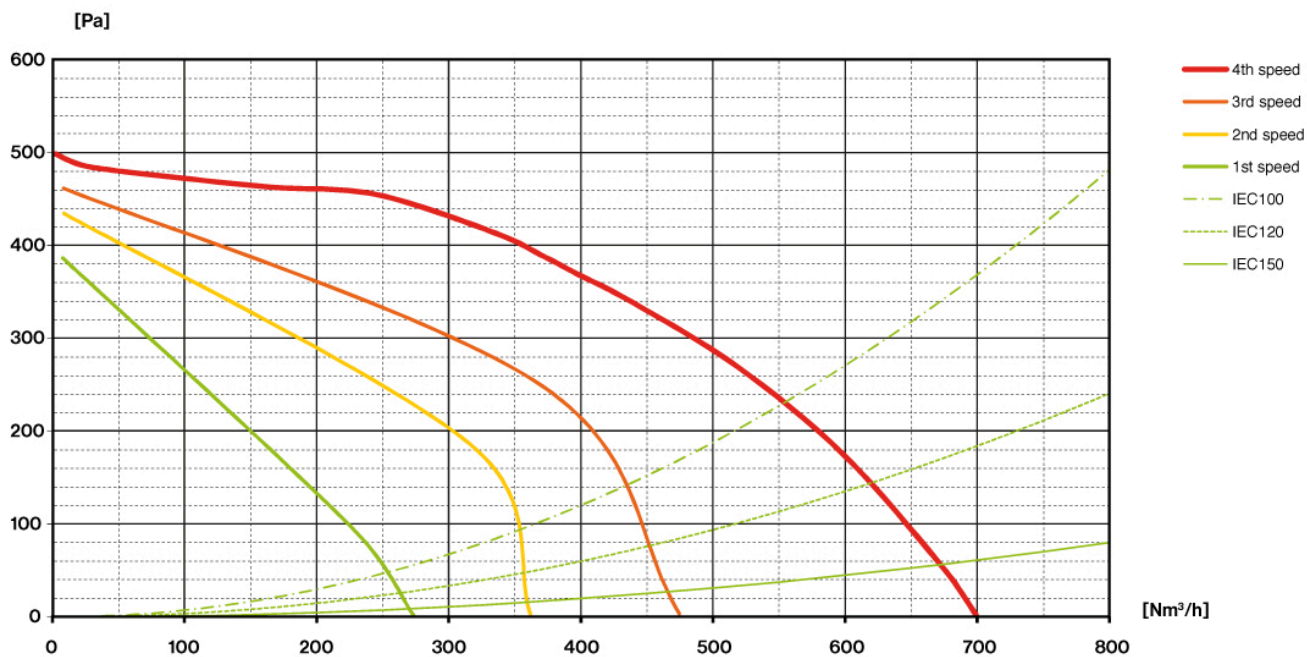

GRUPPO BLACK


01GRU-80-B - Gruppo Murano
Black 80

Sortiment

Design

EAN Kode

8034122358628

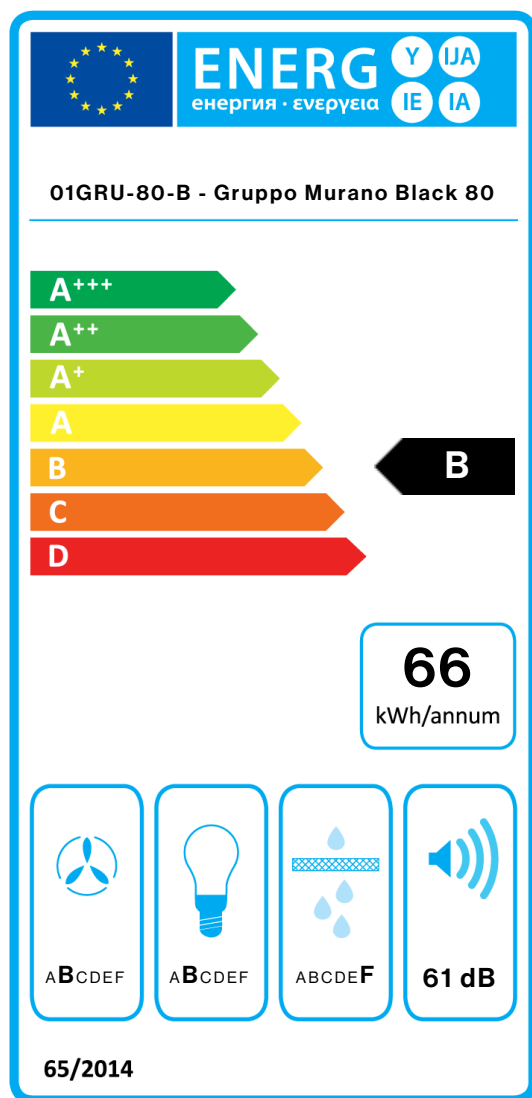

PF		
S	Falmec Spa	
M	01GRU-80-B - Gruppo Murano Black 80	
AEC	65,9	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	21,6	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	270,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	670,0	m ³ /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEI	64,9	
Qbep	333,0	m ³ /h
Pbep	407	Pa
Qboost	670,0	m ³ /h
Wbep	147,7	W
WL	9,00	W
Emiddle	190	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.