

## LAGUNA

### Version

Wall 90 cm - 800 m<sup>3</sup>/h

### Collection

Design+

### EAN code

8034122350912

## KACL.825#N

Black glass - Wall 90 cm

### Collection

Accessoires

### EAN code

8034122709383



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**Scotch brite stainless steel (AISI 304)**  
**Tempered glass**  
**Perimeter suction**  
**Touch control + 24 h function**  
**LED lighting**  
**Metallic grease filter, removable and washable**  
**Charcoal filter included**

## OPTIONAL ACCESSORIES

### KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

### KACL.825#F

White glass - Wall 90 cm

### KACL.825#N

Black glass - Wall 90 cm

### KACL.798#41F

Remote under-roof motor 950 m<sup>3</sup>/h

### KACL.770#41F

Remote under-roof 1100 m<sup>3</sup>/h  
Brushless

### KACL.786#41F

Outdoor extractor fan 1000 m<sup>3</sup>/h

### KACL.796#4AF

Outdoor extractor fan 1500 m<sup>3</sup>/h

### KACL.797#4AF

Remote under-roof motor 1300 m<sup>3</sup>/h

## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

90 cm

### Finishing

Scotch brite stainless steel (AISI 304)

Tempered glass

### Motor

800 m<sup>3</sup>/h

### Type of control

Touch control

### Speed settings

4

### Lighting

Led 4x1,2 W - 3200 K

### Filter

Metallic filter "Base" - 235x245 mm - 2 pz

### Charcoal filter

Round charcoal filter Ø170 mm - Type 6

### Minimum distance

Gas hob: 60 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### LAGUNA

Wall 90 cm - 800 m<sup>3</sup>/h

### Gross weight

35.00 kg

### Net weight

28.00 kg

### Volume

0.59 m<sup>3</sup>

### Packaging size

Length

1115 mm

Height

1100 mm

Depth

485 mm

### GLASS KIT

Black glass - Wall 90 cm

### Gross weight

19.50 kg

### Net weight

17.00 kg

### Volumes

0.09 m<sup>3</sup>

### Packaging size

Length

945 mm

Height

105 mm

Depth

955 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage / Frequency

220-240V

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

670 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

67 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)

500 Pa

### Max. motor power

215 W

### ENERGY CLASS

B

## LAGUNA

### Version

Wall 90 cm - 800 m<sup>3</sup>/h

### Collection

Design+

### EAN code

8034122350912

## KACL.825#N


Black glass - Wall 90 cm

### Collection

Accessoires

### EAN code

8034122709383



## LAGUNA

## KACL.825#N

Black glass - Wall 90 cm

### Version

Wall 90 cm - 800 m<sup>3</sup>/h

### Collection

Accessoires

### EAN code

8034122709383

### Collection

Design+


### EAN code

8034122350912

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacity (m3/h) I.E.C.61591 Normalized Pipes	270	360	470	670
Maximum pressure (Pa)	390	420	460	500
Motor Power (W)	134	156	180	215
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

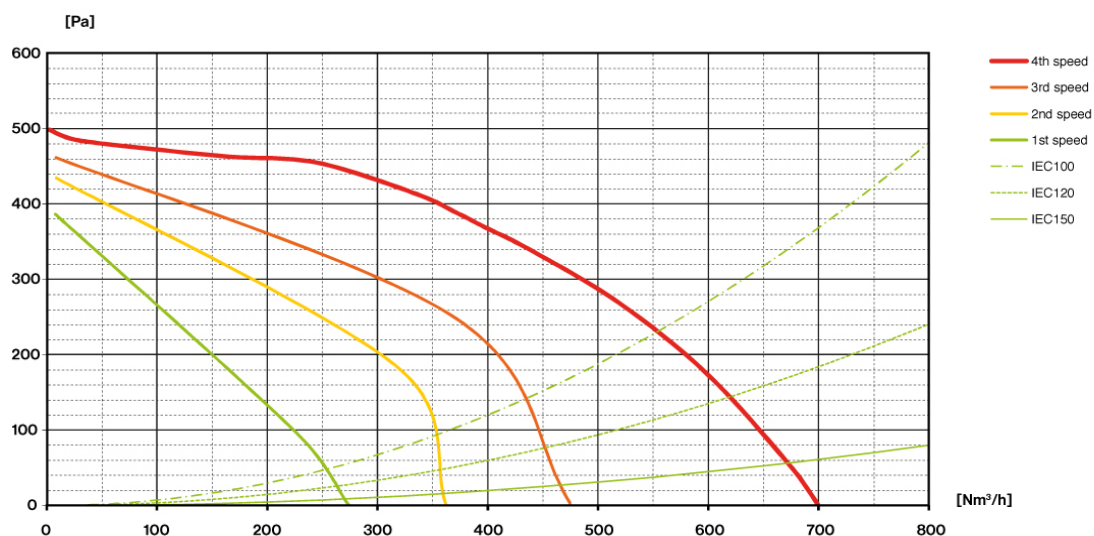

## LAGUNA

## KACL.825#N

Black glass - Wall 90 cm

### Version

Wall 90 cm - 800 m<sup>3</sup>/h

### Collection

Accessoires

### EAN code

8034122709383


### Collection

Design+

### EAN code

8034122350912

## ENERGY LABEL

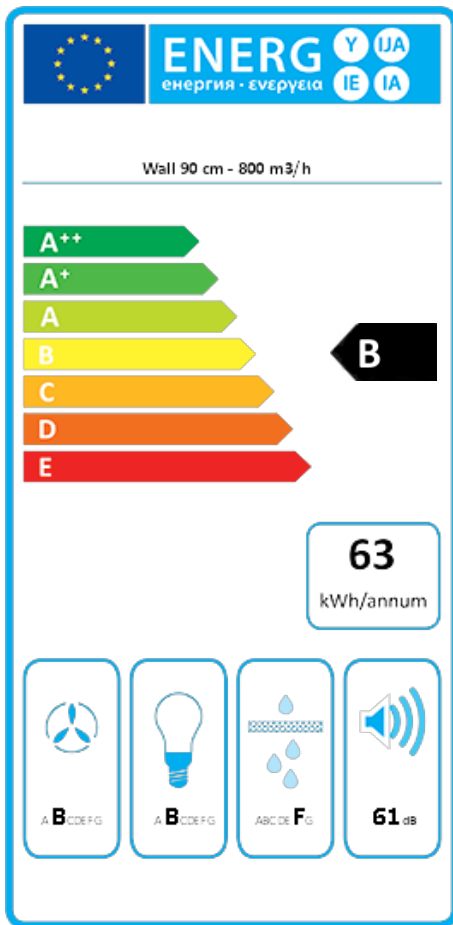

PF		
S	Falmec Spa	
M	Wall 90 cm - 800 m <sup>3</sup> /h	
AEC	63,2	kWh/a
ECC	B	
FDE	25,5	
FDEC	B	
LE	20,5	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	270,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	670,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	63,5	
Qbep	333,0	m <sup>3</sup> /h
Pbep	407	Pa
Qboost	670,0	m <sup>3</sup> /h
Wbep	147,7	W
WL	5,30	W
Emiddle	109	lux
Lwa-SPEmax	61	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.