

## LAGUNA

### Version

### Collection

Design+

### EAN code

8034122350912



*The photograph is purely for information  
It may not correspond to the selected version.*

### FEATURES

**Perimeter suction**  
**Touch control + 24 h function**  
**LED lighting**  
**Metallic grease filter, removable and washable**  
**Charcoal filter included**

### OPTIONAL ACCESSORIES

**KACL.770#41F**  
Remote under-roof 1100 m3/h  
Brushless

**KACL.786#41F**  
Outdoor extractor fan 1000 m3/h

**KACL.796#4AF**  
Outdoor extractor fan 1500 m3/h

**KACL.797#4AF**  
Remote under-roof motor 1300 m3/h

**KACL.798#41F**  
Remote under-roof motor 950 m3/h

**KACL.815**  
Protective cleaning cloths for stainless steel (box 10 pcs)

**KACL.825#F**  
White glass - Wall 90 cm

**KACL.825#N**  
Black glass - Wall 90 cm

### TECHNICAL FEATURES

**Installation type**  
Wall

**Finishing**  
Scotch brite stainless steel (AISI 304)  
Tempered glass

**Motor**  
800 m<sup>3</sup>/h

**Type of control**  
Touch control

**Speed settings**  
4

**Lighting**  
Led 4x1,2 W - 3200 K

**Filter**  
3 x Metallic filter "Base" - 235x245 mm

**Charcoal filter**  
Round charcoal filter Ø170 mm - Type 6 (optional)

**Minimum distance**  
Gas hob: 60 cm  
Electric hob: 52 cm

### PACKAGING:WEIGHTS AND VOLUMES

**LAGUNA Gross weight**  
35 kg

**Net weight**  
28 kg

**Volumes**  
0.59 m<sup>3</sup>

**Packaging size**  
Length 1115 mm  
Height 485 mm  
Depth 1100 mm

**GLASS KIT Black glass - Wall 90 cm Gross weight**  
19.5 kg

**Net weight**  
17 kg

**Volumes**  
0.09 m<sup>3</sup>

**Packaging size**  
Length 945 mm  
Height 105 mm  
Depth 955 mm

### CONSUMPTION AND CONNECTION FEATURES

**Voltage**  
220-240V

**Frequency**  
50-60Hz

**Plug type**  
Shuko

### MOTOR TECHNICAL SHEET


**Maximum capacity**  
670 m<sup>3</sup>/h  
I.E.C. 61591

**Maximum noise level**  
67 dB(A)re1pW  
I.E.C.60704-2-13

**Maximum pressure (Pa)**  
500 Pa

**Max. motor power**  
215 W

**ENERGY CLASS**  
B



LAGUNA

Version

Collection

Design+


EAN code

8034122350912

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacity (m3/h) I.E.C.61591	270	360	470	670
Maximum pressure (Pa)	390	420	460	500
Motor Power (W)	134	156	180	215
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

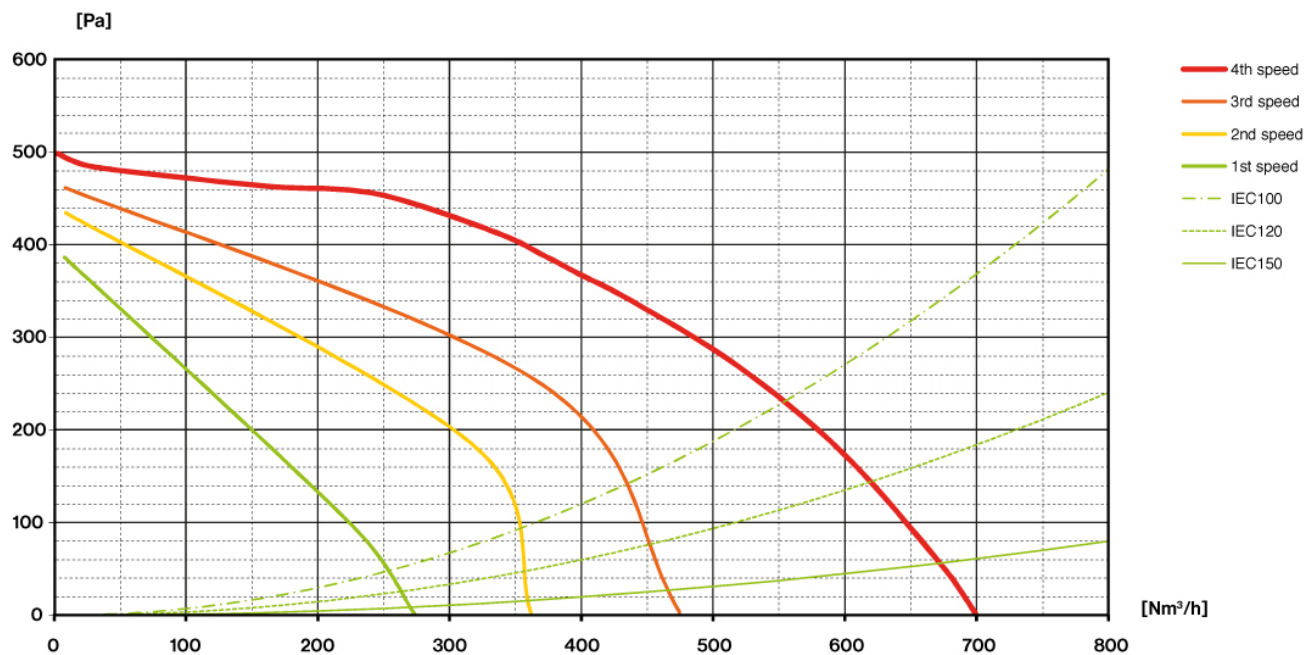

LAGUNA

Version


Collection

Design+

EAN code

8034122350912

## ENERGY LABEL

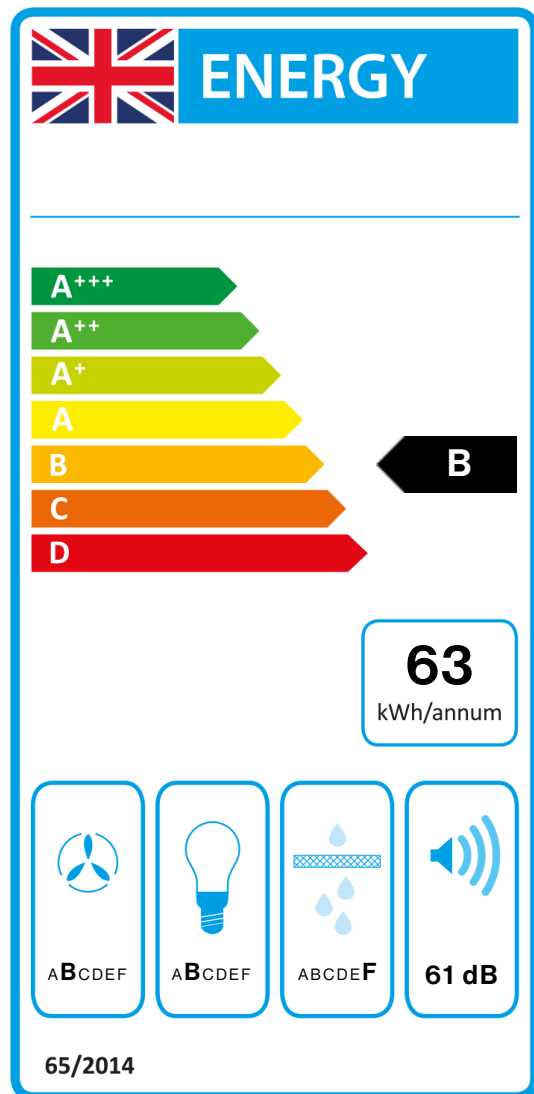

PF		
S	Falmec Spa	
M		
AEC	63,2	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	20,5	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	270,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	670,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEl	63,5	
Qbep	333,0	m <sup>3</sup> /h
Pbep	407	Pa
Qboost	670,0	m <sup>3</sup> /h
Wbep	147,7	W
WL	5,30	W
Emiddle	109	lex
Lwa-SPEmax	61	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.