

FLIPPER

Seinä 55 cm, satiini valkoinen,
800 m³/h

Design

8034122352190



*The photograph is purely for information
It may not correspond to the selected version.*

OMINAISUUDET

Elektroniset kytkimet
Metalliset rasvasuodattimet,
irroitettavat ja pestävät
Lisävarusteena uudelleen
aktivoitava Carbon.Zeo
suodatin
Aktiivihiilisuodatin
vakiovarusteena
Mahdollista asentaa seinän läpi
Hormiputken suoja
lisävarusteena
Valkoinen karkaistu lasi,
keskellä RST lista
Himmennettävä LED valaistus
Säädettävä LED valosävy (2700
- 5600 K)

Dynamic and dimmable Led light
from 03.04.24

OPTIONAL ACCESSORIES

KACL.865

Seinä

KACL.941

Viistotuulettimeen suodatin kit

KCQAN.00#B

Hormiputkensuoja (valkoinen)

KCQAN.00#I

Hormiputkensuoja (RST)

TECHNICAL FEATURES

Installation type

Seinä

Dimensions

55 cm

Viimeistelystä

Valkoinen lasi satiinipinta

Karkaistu valkoinen lasi, keskellä

RST lista

Motor

800 m³/h

Type of control

Elektroniset kytkimet

Speed settings

3 + boost

Lighting

Led 2x1,2 W - 2700 K / 5600 K

Filter

Metallic filter "Base" - 284x234

mm

Charcoal filter

Pyöreä aktiivihiilisuodatin Ø170mm

- Type 6 ()

: 52 cm

: 52 cm

PACKAGING: WEIGHTS AND VOLUMES

22 kg

17 kg

0.25 m³

775 mm

450 mm

705 mm

CONSUMPTION AND CONNECTION FEATURES

280 W

220-240V

50-60Hz

Shuko

MOTOR TECHNICAL SHEET

750 m³/h

I.E.C. 61591



66 dB(A)_{re1pW}

I.E.C.60704-2-13

510 Pa

224 W

A



FLIPPER


Seinä 55 cm, satiini valkoinen,
800 m³/h

Design

8034122352190

MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
dB(A) _{re1pW-I.E.C.60704-2-13}	46	53	58	66
(m ³ /h) I.E.C.61591	295	390	500	750
	390	440	490	510
	130	150	178	224
	150	150	150	150

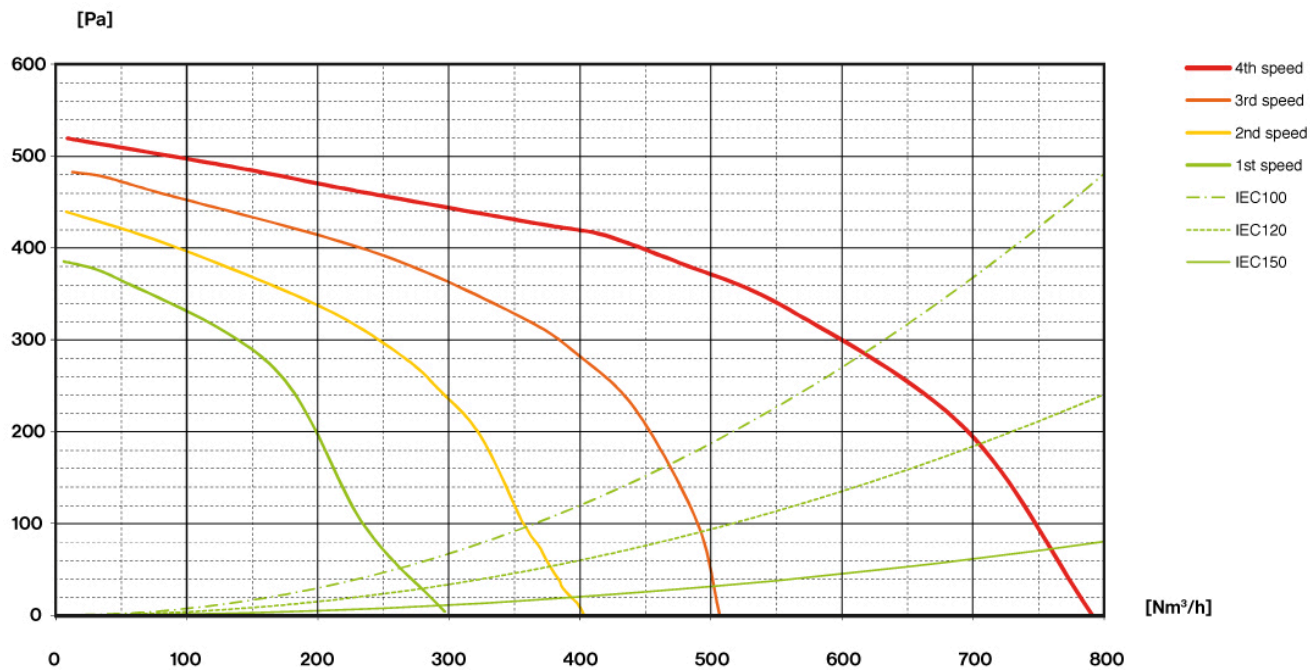


FLIPPER

Seinä 55 cm, satiini valkoinen,
800 m³/h

Design

8034122352190

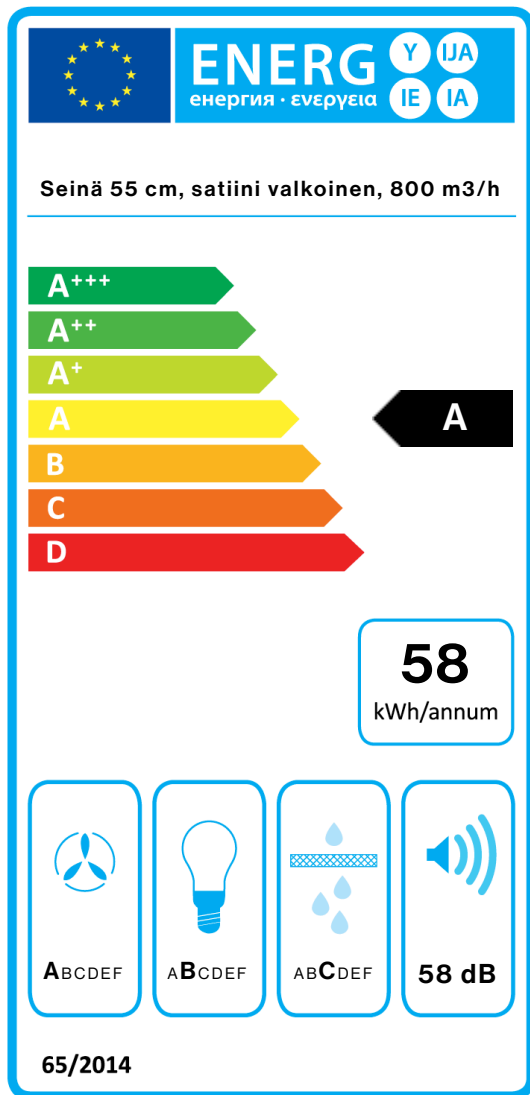

PF		
S	Falmec Spa	
M	Seinä 55 cm, satiini valkoinen, 800 m ³ /h	
AEC	57,7	kWh/a
EEC	A	
FDE	29,4	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	295,0	m ³ /h
Qmax	500,0	m ³ /h
Qboost	750,0	m ³ /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0,9	
EEL	53,2	
Qbep	430,0	m ³ /h
Pbep	404	Pa
Qboost	750,0	m ³ /h
Wbep	164,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	58	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.