

## MIRA BLACK

01MIR-40-VH - Væg - 40 cm -  
Sort - 800 m<sup>3</sup>/h

### Sortiment

Design

### EAN Kode

8034122359847



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

Kantsug  
Elektronisk kontrolpanel  
Vaskbare rustfrie fedtfiltere  
Kulfilter  
Dæmpbart LED-lys  
Dynamic LED Light (2700K -  
5600K)

Dynamic and dimmable Led light  
from 03.04.24

## TEKNISK BESKRIVELSE

**Installation**  
Væg

**Dimensioner**  
40 cm

**Materiale**  
Sortlakeret stål

**Motor**  
800 m<sup>3</sup>/h

**Betjening**  
Elektronisk kontrolpanel

**Hastighed**  
3 + boost

**Belysning**  
Led 2x1,2 W - 2700 K / 5600 K

**Filter**  
Metallfiltere - Base - 274x274 mm

**Kulfilter**  
Rundt kulfilter Ø170 mm. Type 6  
(Tilvalg)

**Minimumsafstand**  
Gaskomfur: 60 cm  
Kogeplade: 52 cm

## EMBALLAGE: VÆGT OG VOLUMEN

**Bruttovægt**  
25 kg

**Nettovægt**  
21 kg

**Volumen**  
0.28 m<sup>3</sup>

**Mål på emballage**

Længde  
995 mm

Højde  
480 mm

Dybde  
595 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

**Maksimalt forbrug**  
280 W

**Spænding**  
220-240V

**Frekvens**  
50-60Hz

Shuko

## DATABLAD MOTOR


**Maksimal kapacitet**  
590 m<sup>3</sup>/h  
I.E.C. 61591

**Maksimalt støjniveau**  
64 dB(A)<sub>re1pW</sub>  
I.E.C.60704-2-13

**Maksimalt tryk (Pa)**  
500 Pa

**Maksimal sugestyrke**  
203 W

**ENERGIKLASSE**  
B



## MIRA BLACK

01MIR-40-VH - Væg - 40 cm -  
Sort - 800 m<sup>3</sup>/h

### Sortiment

Design


### EAN Kode

8034122359847

## DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	45	50	55	64
Kapacitet (m <sup>3</sup> /h) I.E.C.61591	230	300	380	590
Maksimalt tryk (Pa)	390	420	460	500
Forbrug (W)	134	156	180	203
Luftudtag	150	150	150	150

## KAPACITET / TRYK

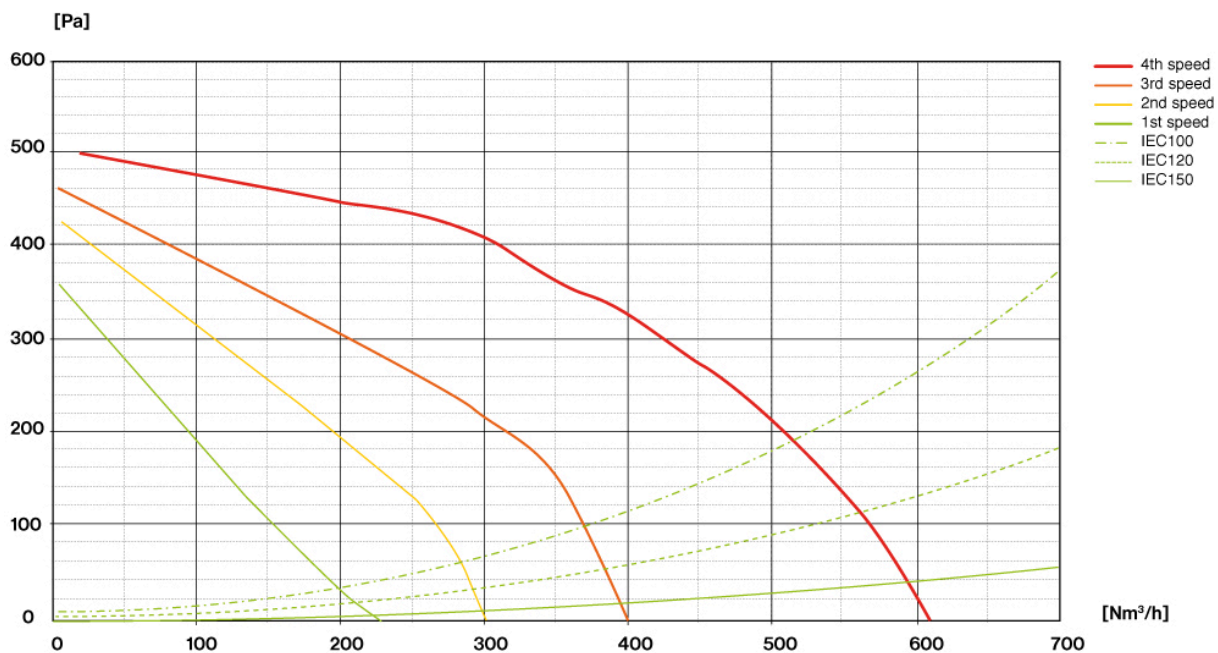

## MIRA BLACK


01MIR-40-VH - Væg - 40 cm -  
Sort - 800 m<sup>3</sup>/h

### Sortiment

Design

### EAN Kode

8034122359847

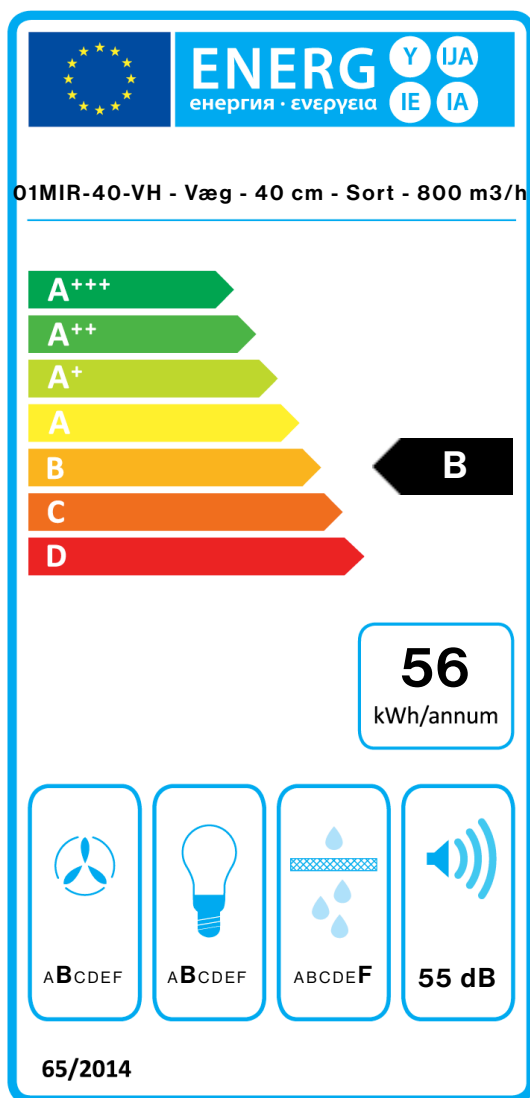

PF		
S	Falmec Spa	
M	01MIR-40-VH - Væg - 40 cm - Sort - 800 m <sup>3</sup> /h	
AEC	55,7	kWh/a
EEC	B	
FDE	25,6	
FDEC	B	
LE	20,5	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	230,0	m <sup>3</sup> /h
Qmax	380,0	m <sup>3</sup> /h
Qboost	590,0	m <sup>3</sup> /h
SPEmin	45	dBa
SPEmax	55	dBa
SPEboost	64	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEI	62,4	
Qbep	287,0	m <sup>3</sup> /h
Pbep	415	Pa
Qboost	590,0	m <sup>3</sup> /h
Wbep	129,0	W
WL	5,30	W
Emiddle	109	lux
Lwa-SPEmax	55	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.