

PLANE BLACK

01PL-90-VSH - Væg - 90 cm -
Sort - 800 m³/h

Sortiment

Design

EAN Kode

8034122359892



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Kantsug
Elektronisk kontrolpanel
LED lys
Vaskbare rustfrie fedtfiltere
Kulfilter

MULIGHEDER FOR TILVALG

01KU-3

Rektangulært kulfilter. Type 3

01MO-GAVL

Gavlmotor til udendørs brug
1000 m³/h

01MO-GAVL-15

Gavlmotor til udendørs brug
1500 m³/h

01MO-LOFT

Loftmotorer under taget 950
m³/h

01MO-LOFT-13

Loftmotor 1300 m³ Ø200 mm

101080245

Metallfiltre - Base - 278x301 mm

KACL.701#41F

Motor 1000 m³/h

KACL.770#41F

Loftmotorer 1100 m³/h

Brushless

KACL.864

Air flow conveyer til
recirkulation. Væghængte
modeller.

KACL.948#IF

Filter unit for t-shaped wall
hoods

TEKNISK BESKRIVELSE

Installation

Væg

Dimensioner

90 cm

Materiale

Matte black painted steel

Motor

800 m³/h

Betjening

Elektronisk kontrolpanel

Hastighed

3 + boost

Belysning

LED 2x1,2 W - 3200 K

Filter

3 x Metallfiltre - Base - 278x301
mm

Kulfilter

Rektangulært kulfilter. Type 3
(Medfølger)

Minimumsafstand

Gaskomfur: 63 cm

Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt

25 kg

Nettovægt

20 kg

Volumen

0.27 m³

Mål på emballage

Længde

995 mm

Højde

450 mm

Dybde

595 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

280 W

Spænding

220-240V

Frekvens

50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet

680 m³/h

I.E.C. 61591

Maksimalt støjniveau

68 dB(A)_{re1pW}

I.E.C.60704-2-13

Maksimalt tryk (Pa)


500 Pa

Maksimal sugestyrke

215 W

ENERGIKLASSE

B



PLANE BLACK

01PL-90-VSH - Væg - 90 cm -
Sort - 800 m³/h

Sortiment

Design


EAN Kode

8034122359892

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	49	56	62	68
Kapacitet (m ³ /h) I.E.C.61591	280	370	480	680
Maksimalt tryk (Pa)	390	420	480	500
Forbrug (W)	132	153	175	215
Luftudtag	150	150	150	150

KAPACITET / TRYK

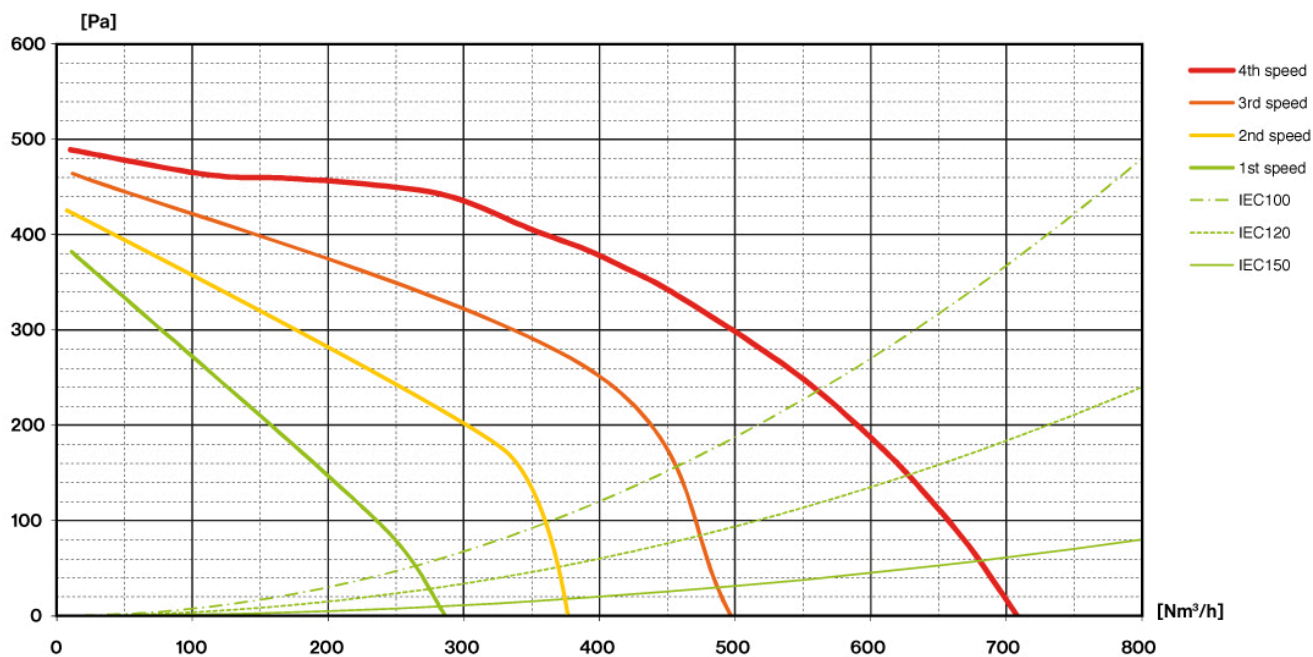

PLANE BLACK


01PL-90-VSH - Væg - 90 cm -
Sort - 800 m³/h

Sortiment

Design

EAN Kode

8034122359892

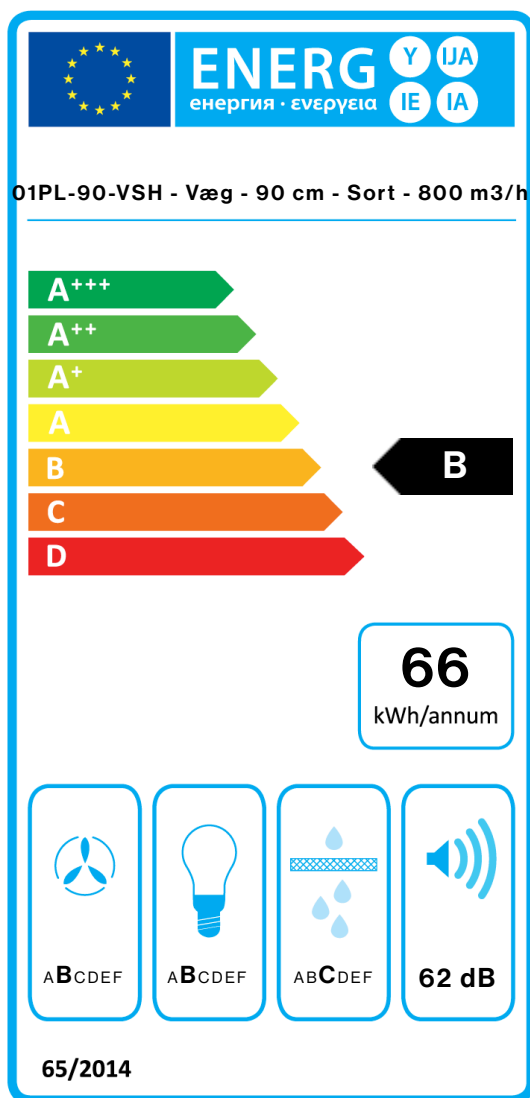

PF		
S	Falmec Spa	
M	01PL-90-VSH - Væg - 90 cm - Sort - 800 m ³ /h	
AEC	66,1	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	280,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	680,0	m ³ /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEI	63,9	
Qbep	382,0	m ³ /h
Pbep	384	Pa
Qboost	680,0	m ³ /h
Wbep	155,1	W
WL	5,30	W
Emiddle	109	lux
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.