

## PLANE BLACK

01PL-90-VSH - Væg - 90 cm -  
Sort - 800 m<sup>3</sup>/h

### Sortiment

Design

### EAN Kode

8034122359892



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

Kantsug  
Elektronisk kontrolpanel  
LED lys  
Vaskbare rustfrie fedtfiltere  
Kulfilter

## MULIGHEDER FOR TILVALG

### 01KU-3

Rektangulært kulfilter. Type 3

### 01MO-GAVL

Gavlmotor til udendørs brug  
1000 m<sup>3</sup>/h

### 01MO-GAVL-15

Gavlmotor til udendørs brug  
1500 m<sup>3</sup>/h

### 01MO-LOFT

Loftmotorer under taget 950  
m<sup>3</sup>/h

### 01MO-LOFT-13

Loftmotor 1300 m<sup>3</sup> Ø200 mm

### 101080245

Metallfiltre - Base - 278x301 mm

### KACL.701#41F

Motor 1000 m<sup>3</sup>/h

### KACL.770#41F

Loftmotorer 1100 m<sup>3</sup>/h

Brushless

### KACL.864

Air flow conveyer til  
recirkulation. Væghængte  
modeller.

### KACL.948#IF

Filter unit for t-shaped wall  
hoods

## TEKNISK BESKRIVELSE

### Installation

Væg

### Dimensioner

90 cm

### Materiale

Matte black painted steel

### Motor

800 m<sup>3</sup>/h

### Betjening

Elektronisk kontrolpanel

### Hastighed

3 + boost

### Belysning

LED 2x1,2 W - 3200 K

### Filter

3 x Metallfiltre - Base - 278x301  
mm

### Kulfilter

Rektangulært kulfilter. Type 3  
(Medfølger)

### Minimumsafstand

Gaskomfur: 63 cm

Kogeplade: 52 cm

## EMBALLAGE: VÆGT OG VOLUMEN

### Bruttovægt

25 kg

### Nettovægt

20 kg

### Volumen

0.27 m<sup>3</sup>

### Mål på emballage

Længde

995 mm

Højde

450 mm

Dybde

595 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

### Maksimalt forbrug

280 W

### Spænding

220-240V

### Frekvens

50-60Hz

Shuko

### DATABLAD MOTOR

#### Maksimal kapacitet

680 m<sup>3</sup>/h

I.E.C. 61591

#### Maksimalt støjniveau

68 dB(A)<sub>re1pW</sub>

I.E.C.60704-2-13

#### Maksimalt tryk (Pa)


500 Pa

#### Maksimal sugestyrke

215 W

### ENERGIKLASSE

B



## PLANE BLACK

01PL-90-VSH - Væg - 90 cm -  
Sort - 800 m<sup>3</sup>/h

### Sortiment

Design


### EAN Kode

8034122359892

## DATABLAD MOTOR

| Motorhastighed  | 1   | 2   | 3   | 4   |
|---|-----|-----|-----|-----|
| Støjniveau<br>dB(A) <sub>re1pW-I.E.C.60704-2-13</sub> | 49  | 56  | 62  | 68  |
| Kapacitet (m <sup>3</sup> /h)<br>I.E.C.61591          | 280 | 370 | 480 | 680 |
| Maksimalt tryk (Pa)                                   | 390 | 420 | 480 | 500 |
| Forbrug (W)   | 132 | 153 | 175 | 215 |
| Luftudtag   | 150 | 150 | 150 | 150 |

## KAPACITET / TRYK

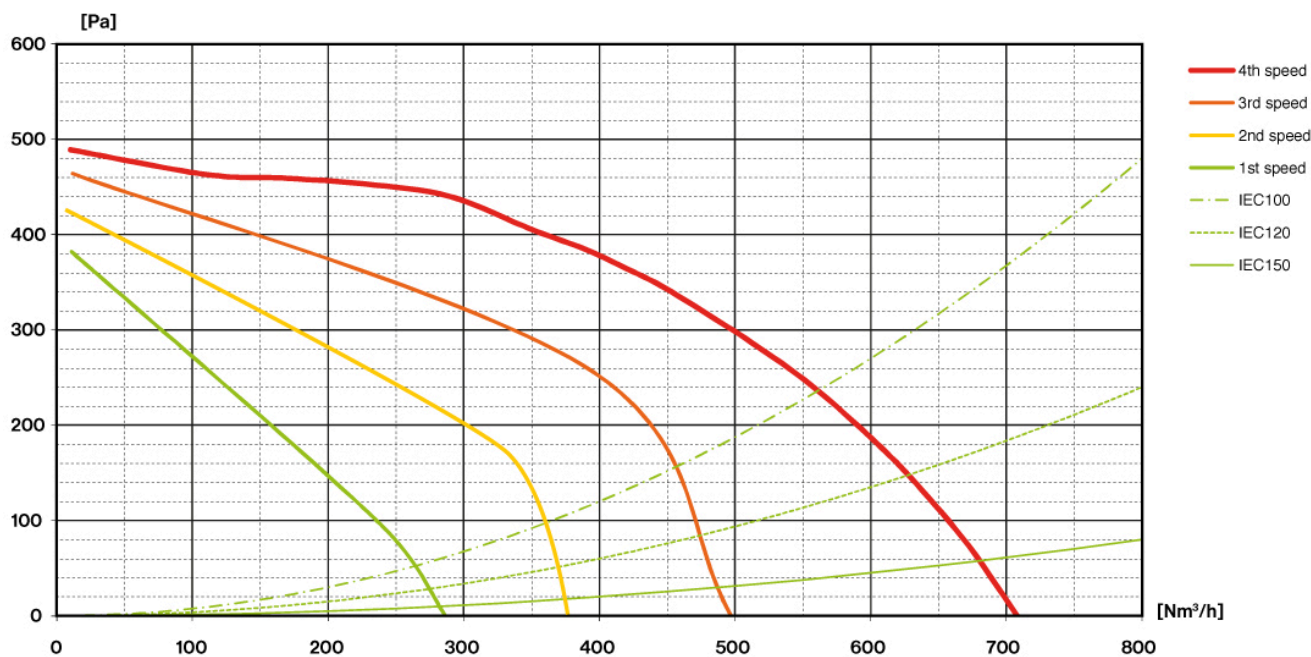

## PLANE BLACK


01PL-90-VSH - Væg - 90 cm -  
Sort - 800 m<sup>3</sup>/h

### Sortiment

Design

### EAN Kode

8034122359892

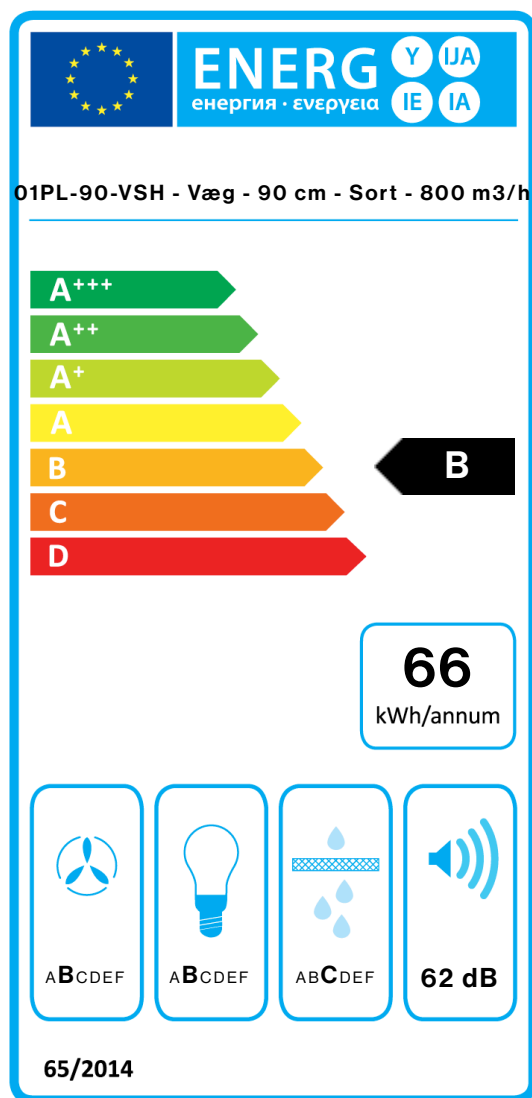

| PF         |  |                   |
|------------|--|-------------------|
| S          | Falmec Spa   |                   |
| M          | 01PL-90-VSH - Væg - 90 cm - Sort - 800 m <sup>3</sup> /h |                   |
| AEC        | 66,1   | kWh/a             |
| EEC        | B  |                   |
| FDE        | 26,3   |                   |
| FDEC       | B  |                   |
| LE         | 20,5   |                   |
| LEC        | B  |                   |
| GFE        | 80,0   |                   |
| GFEC       | C  |                   |
| Qmin       | 280,0  | m <sup>3</sup> /h |
| Qmax       | 480,0  | m <sup>3</sup> /h |
| Qboost     | 680,0  | m <sup>3</sup> /h |
| SPEmin     | 49   | dBa               |
| SPEmax     | 62   | dBa               |
| SPEboost   | 68   | dBa               |
| PO         | -  | W                 |
| PS         | 0,48   | W                 |
| PI         |  |                   |
| F          | 1,1  |                   |
| EEI        | 63,9   |                   |
| Qbep       | 382,0  | m <sup>3</sup> /h |
| Pbep       | 384  | Pa                |
| Qboost     | 680,0  | m <sup>3</sup> /h |
| Wbep       | 155,1  | W                 |
| WL         | 5,30   | W                 |
| Emiddle    | 109  | lux               |
| Lwa-SPEmax | 62   | dBa               |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.