

## PLANE BLACK

### Version

Wall 90 cm - Black - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122359892



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

### OPTIONAL ACCESSORIES

#### KACL.701#41F

Motor 1000 m<sup>3</sup>/h

#### KACL.770#41F

Remote under-roof 1100 m<sup>3</sup>/h

Brushless

#### KACL.786#41F

Outdoor extractor fan 1000

m<sup>3</sup>/h

#### KACL.796#4AF

Outdoor extractor fan 1500 m<sup>3</sup>/h

#### KACL.797#4AF

Remote under-roof motor 1300

m<sup>3</sup>/h

#### KACL.798#41F

Remote under-roof motor 950

m<sup>3</sup>/h

#### KACL.864

Air flow conveyer for re-circulation version (Wall)

#### KACL.948#IF

Filter unit for t-shaped wall hoods

## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

90 cm

### Finishing

Painted black steel

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 2x1,2 W - 3200 K

### Filter

3 x Metallic filter "Base" -

278x301 mm

### Charcoal filter

Square charcoal filter - Type 3

(optional)

### Minimum distance

Gas hob: 63 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

25 kg

### Net weight

20 kg

### Volumes

0.27 m<sup>3</sup>

### Packaging size

Length

995 mm

Height

450 mm

Depth

595 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

680 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)


500 Pa

### Max. motor power

215 W

## ENERGY CLASS

B



## PLANE BLACK

### Version

Wall 90 cm - Black - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122359892

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	49	56	62	68
Capacity (m <sup>3</sup> /h) I.E.C.61591	280	370	480	680
Maximum pressure (Pa)	390	420	480	500
Motor Power (W)	132	153	175	215
Air outlet	150	150	150	150

## CAPACITY / PRESSURE



## PLANE BLACK

### Version

Wall 90 cm - Black - 800 m<sup>3</sup>/h


### Collection

Design

### EAN code

8034122359892

## ENERGY LABEL

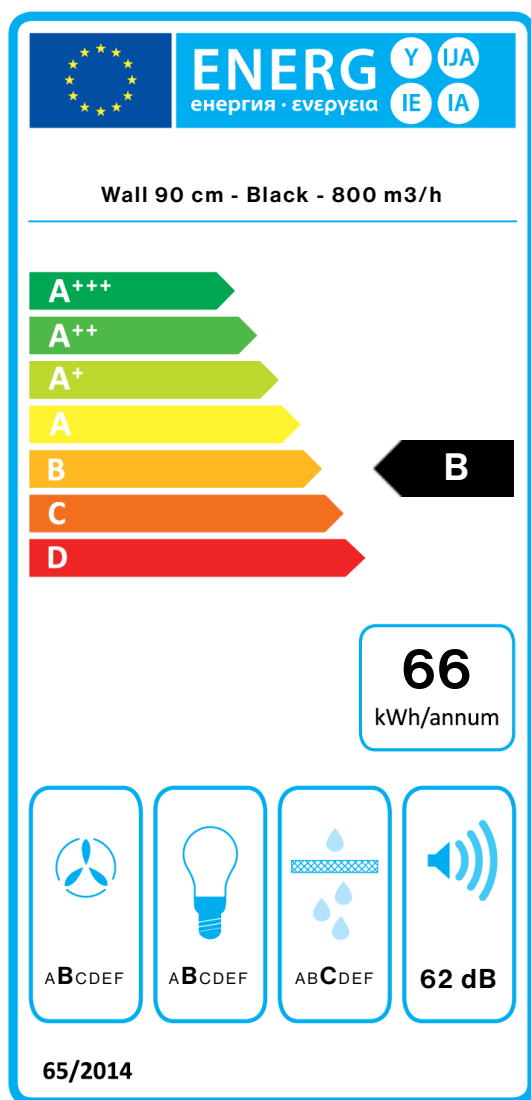

PF		
S	Falmec Spa	
M	Wall 90 cm - Black - 800 m <sup>3</sup> /h	
AEC	66,1	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	280,0	m <sup>3</sup> /h
Qmax	480,0	m <sup>3</sup> /h
Qboost	680,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEl	63,9	
Qbep	382,0	m <sup>3</sup> /h
Pbep	384	Pa
Qboost	680,0	m <sup>3</sup> /h
Wbep	155,1	W
WL	5,30	W
Emiddle	109	lx
Lwa-SPEmax	62	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.