

## LAGUNA

### Version

### Collection

Design+

### EAN code

8034122319339



The photograph is purely for information  
It may not correspond to the selected version.

## FEATURES

Tempered glass  
Perimeter suction  
Touch control + 24 h function  
LED lighting  
Metallic grease filter,  
removable and washable  
Charcoal filter included

## OPTIONAL ACCESSORIES

**KACL.770#41F**  
Remote under-roof 1100 m3/h  
Brushless

**KACL.786#41F**  
Outdoor extractor fan 1000  
m3/h

**KACL.796#4AF**  
Outdoor extractor fan 1500 m3/h

**KACL.797#4AF**  
Remote under-roof motor 1300  
m3/h

**KACL.798#41F**  
Remote under-roof motor 950  
m3/h

**KACL.815**  
Protective cleaning cloths for  
stainless steel (box 10 pcs)

**KACL.823#F**  
White glass - Island 90 cm

**KACL.823#N**  
Black glass - Island 90 cm

## TECHNICAL FEATURES

**Installation type**  
Island

**Finishing**  
Scotch brite stainless steel (AISI  
304)

Tempered glass

**Motor**  
800 m<sup>3</sup>/h

**Type of control**  
Touch control

**Speed settings**  
4

**Lighting**  
Led 4x1,2 W - 3200 K

**Filter**  
3 x Metallic filter "Base" -  
235x245 mm

**Charcoal filter**  
Round charcoal filter Ø170 mm -  
Type 6 (optional)

**Minimum distance**  
Gas hob: 60 cm  
Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

**LAGUNA Gross weight**  
45 kg

**Net weight**  
38 kg

**Volumes**  
0.62 m<sup>3</sup>

**Packaging size**  
Length  
1115 mm  
Height  
505 mm  
Depth  
1100 mm

**GLASS KIT White glass - Island**  
90 cm **Gross weight**  
23.5 kg

**Net weight**  
21 kg

**Volumes**  
0.09 m<sup>3</sup>

**Packaging size**  
Length  
945 mm  
Height  
105 mm  
Depth  
955 mm


## CONSUMPTION AND CONNECTION FEATURES

**Voltage**  
220-240V

**Frequency**  
50-60Hz

**Plug type**  
Shuko

**ENERGY CLASS**  
B



LAGUNA

Version


Collection

Design+

EAN code

8034122319339

## ENERGY LABEL

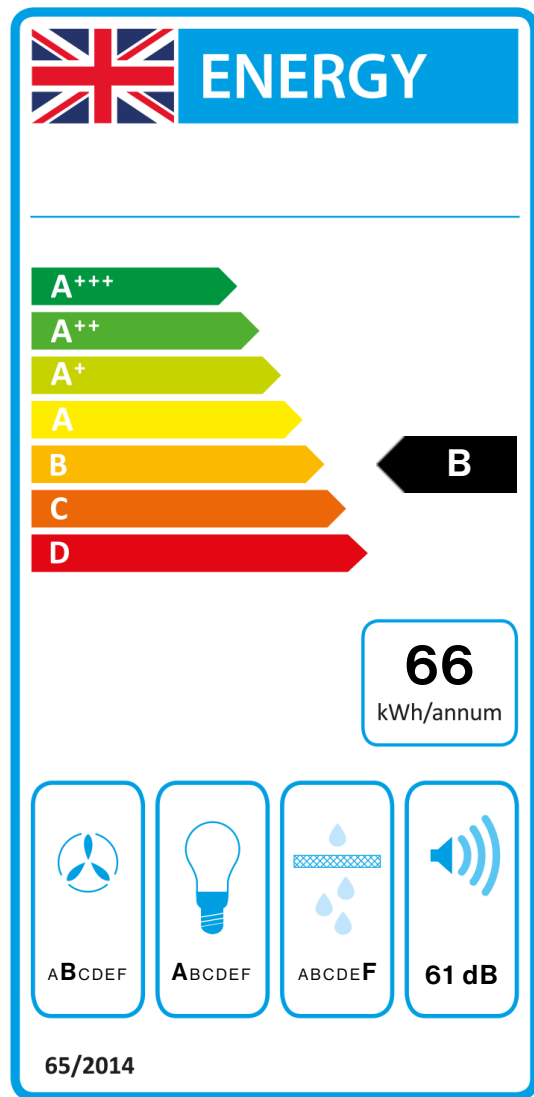

PF		
S	Falmec Spa	
M		
AEC	65,6	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	28,4	
LEC	A	
GFE	53,0	
GFEC	F	
Qmin	270,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	670,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEl	64,8	
Qbep	333,0	m <sup>3</sup> /h
Pbep	407	Pa
Qboost	670,0	m <sup>3</sup> /h
Wbep	147,7	W
WL	8,60	W
Emiddle	245	lux
Lwa-SPEmax	61	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.