

VIRGOLA BLACK

Version
Built-in 120 cm - 600 m3/h

Collection
Design

EAN code
8034122360119



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Electronic control
- Metallic grease filter, removable and washable
- Charcoal filter included
- Dynamic LED Light (2700K - 5600K)
- Painted black steel
- Extendable and retractable tempered smoked glass visor

OPTIONAL ACCESSORIES

- 103050107
- Square charcoal filter - Type 3

TECHNICAL FEATURES

- Installation type
 - Built-in
- Dimensions
 - 120 cm
- Finishing
 - Painted black steel
- Motor
 - 600 m³/h
- Type of control
 - Electronic control
- Speed settings
 - 3
- Lighting
 - Led 4x1,2 W - 2700 K / 5600 K
- Filter
 - Metallic filter "Base" - 278x207 mm
- Charcoal filter
 - Square charcoal filter - Type 3 (optional)
- Minimum distance
 - Gas hob: 52 cm
 - Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES



- Gross weight
 - 19.8 kg
- Net weight
 - 15.7 kg
- Volumes
 - 0.25 m³
- Packaging size
 - Length
 - 1295 mm - Height
 - 410 mm - Depth
 - 465 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption
 - 230 W
- Voltage
 - 220-240V
- Frequency
 - 50-60Hz
- Plug type
 - Schuko

MOTOR TECHNICAL SHEET

- Maximum capacity
 - 480 m³/h
- I.E.C. 61591
- Maximum noise level
 - 65 dB(A)re1pW
- I.E.C.60704-2-13
- Maximum pressure (Pa)
 - 500 Pa
- Max. motor power
 - 180 W
- ENERGY CLASS
 - C



VIRGOLA BLACK

Version
Built-in 120 cm - 600 m3/h


Collection
Design

EAN code
8034122360119

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	58	65
Capacity (m3/h) I.E.C.61591	220	320	480
Maximum pressure (Pa)	270	400	500
Motor Power (W)	100	130	180
Air outlet	120	120	120

CAPACITY / PRESSURE

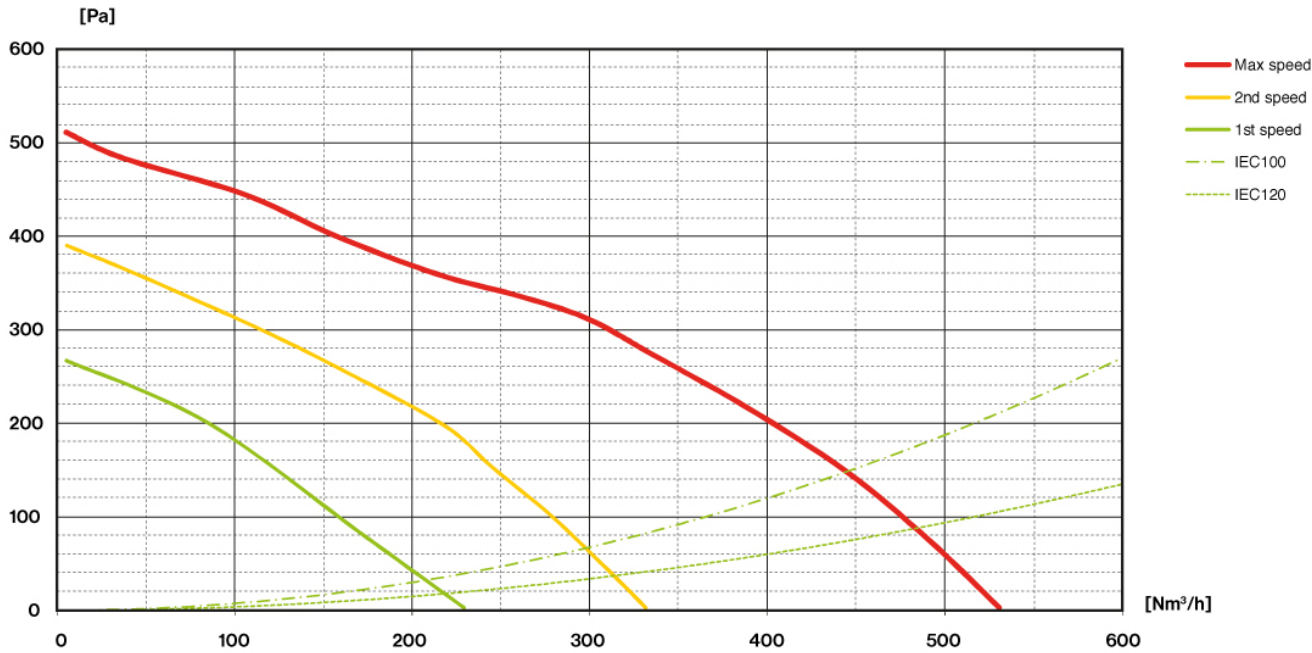


VIRGOLA BLACK

Version
Built-in 120 cm - 600 m3/h

Collection
Design

EAN code
8034122360119

ENERGY LABEL

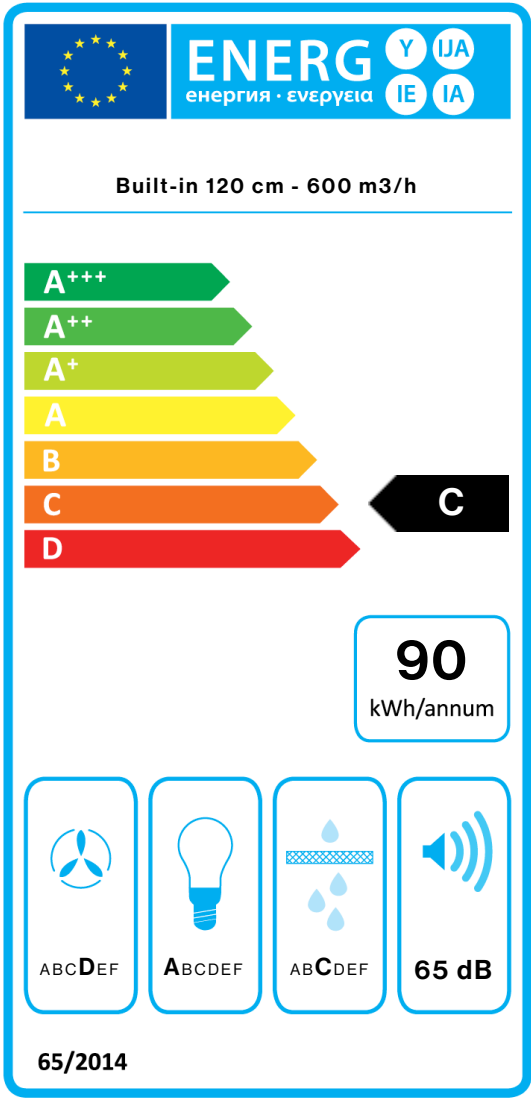

PF		
S	Falmec Spa	
M	Built-in 120 cm - 600 m3/h	
AEC	90,2	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	31,4	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	220,0	m³/h
Qmax	480,0	m³/h
Qboost	480,0	m³/h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W
PI		
F	1.4	
EEL	81,8	
Qbep	303,0	m³/h
Pbep	308	Pa
Qboost	480,0	m³/h
Wbep	164,0	W
WL	8,60	W
Emiddle	270	lex
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.