

TIME

Versiune


Perete 115 cm, Oțel inoxidabil,
garnitură din oțel uzat, 800 m3
/ h

Colectie

Design

Cod EAN

8034122477534

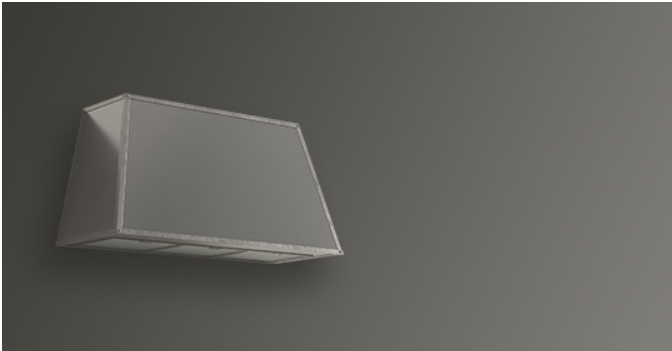

Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Control electronic
Filtru de grasime metalic,
detasabil si lavabil
Filtru de carbon inclus
Optional - telecomanda
Dynamic LED Light (2700K -
5600K)

ACCESORII OPTIONALE

KACL.770#41F
Motor de acoperis 1100 m3/h
Brushless
KACL.786#41F
Motor de exterior 1000 m3/h
KACL.796#4AF
Motor de exterior 1500 m3/h
KACL.797#4AF
Motor de acoperis 1300 m3/h
KACL.798#41F
Motor de acoperis 950 m3/h
105080053
Telecomanda

CARACTERISTICI TEHNICE



Tip de instalare
De perete
Dimensiuni
115 cm cm
Finisaj
Inox
Stainless steel, antique steel
edge
Motor
800 m³/h
Tipul panoului de control
Control electronic

AMBALARE: GREUTATE SI
VOLUM

Greutate bruta
27.4 kg
Greutate neta
22.2 kg
Volum
0.43 m³
Dimensiuni ambalaj
Lungime
1310 mm
Inaltime
550 mm
Adancime
595 mm

CARACTERISTICI CONSUM SI
CONEXIUNE

Consum maxim
280 W
Curent
220-240V
Frecventa
50-60Hz
CLASA DE ENERGIE
A



Vedere din spate


TIME

Versiune
Perete 115 cm, Oțel inoxidabil,
garnitură din oțel uzat, 800 m3
/ h

Colectie
Design

Cod EAN
8034122477534

ETICHETA DE ENERGIE

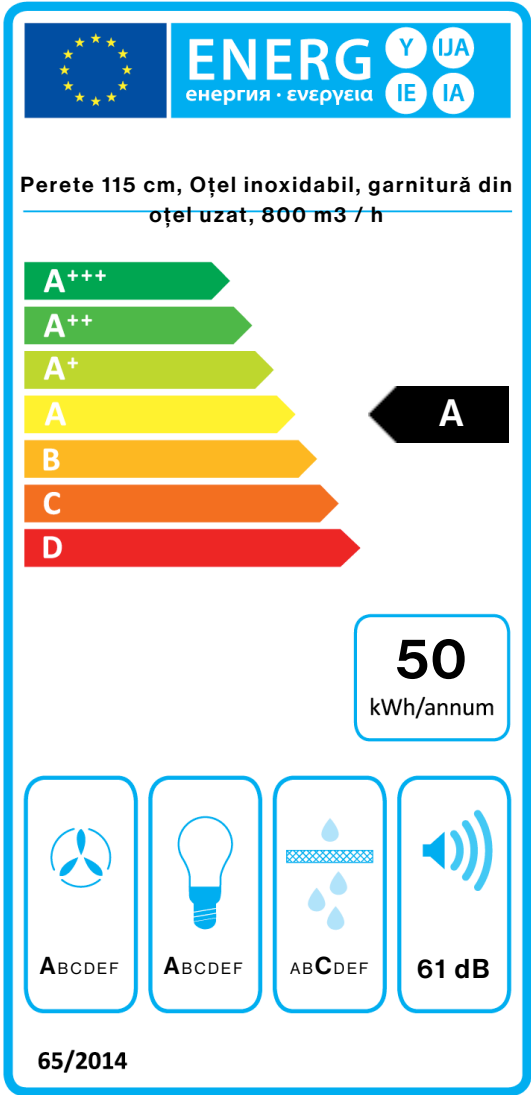

PF		
S	Falmec Spa	
M	Perete 115 cm, Oțel inoxidabil, garnitură din oțel uzat, 800 m3 / h	
AEC	49,5	kWh/a
EEC	A	
FDE	32,6	
FDEC	A	
LE	31,4	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	240,0	m³/h
Qmax	460,0	m³/h
Qboost	700,0	m³/h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.8	
EEl	48,8	
Qbep	453,0	m³/h
Pbep	383	Pa
Qboost	700,0	m³/h
Wbep	148,0	W
WL	8,60	W
Emiddle	270	lex
Lwa-SPEmax	61	dBa