

TIME

Version


Wall 115 cm, Anthracite, worn steel trim, 800 m³/h

Collection

Classic

EAN code

8034122477541

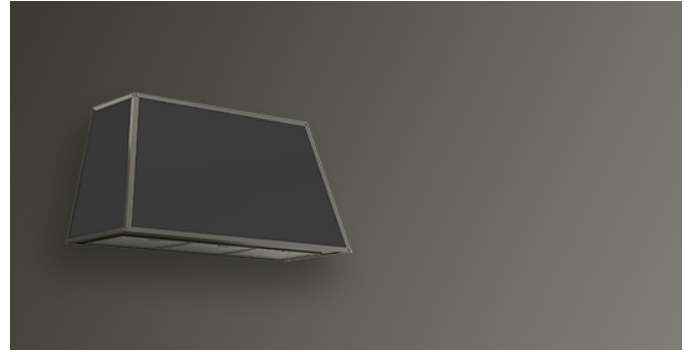

The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Electronic control

LED lighting

Metallic grease filter, removable and washable

Charcoal filter included

Optional remote control

Painted Steel with Pewter finish

OPTIONAL ACCESSORIES

105080053

Remote control

KACL.798#41F

Remote under-roof motor 950 m³/h

KACL.770#41F

Remote under-roof 1100 m³/h

Brushless

KACL.786#41F

Outdoor extractor fan 1000 m³/h

KACL.796#4AF

Outdoor extractor fan 1500 m³/h

KACL.797#4AF

Remote under-roof motor 1300 m³/h

TECHNICAL FEATURES

Installation type

Wall

Dimensions

115 cm cm

Finishing

Painted anthracite steel

Motor

800 m³/h

Type of control

Electronic control

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

27.40 kg

Net weight

22.20 kg

Volume

0.43 m³

Packaging size

Length

1310 mm

Height

595 mm

Depth

550 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

Voltage / Frequency



220-240V

50-60Hz

ENERGY CLASS

A

Rear view



TIME

Version

Wall 115 cm, Anthracite, worn steel trim, 800 m³/h


Collection

Classic

EAN code

8034122477541

ENERGY LABEL

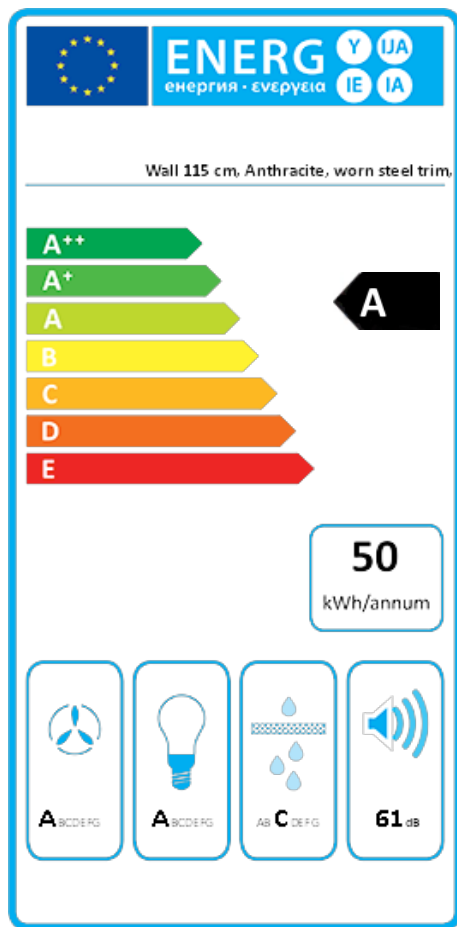

PF		
S	Falmec Spa	
M	Wall 115 cm, Anthracite, worn steel trim,	
AEC	800 m ³ /h	kWh/a
ECC	A	
FDE	32,6	
FDEC	A	
LE	31,4	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	240,0	m ³ /h
Qmax	460,0	m ³ /h
Qboost	700,0	m ³ /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0,8	
EEl	48,8	
Qbep	453,0	m ³ /h
Pbep	383	Pa
Qboost	700,0	m ³ /h
Wbep	148,0	W
WL	8,60	W
Emiddle	270	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.