

MODULA

Version


Modula/M3 Worktop - 114 cm

Collection

Integrated cooking systems

EAN code

8034122359618

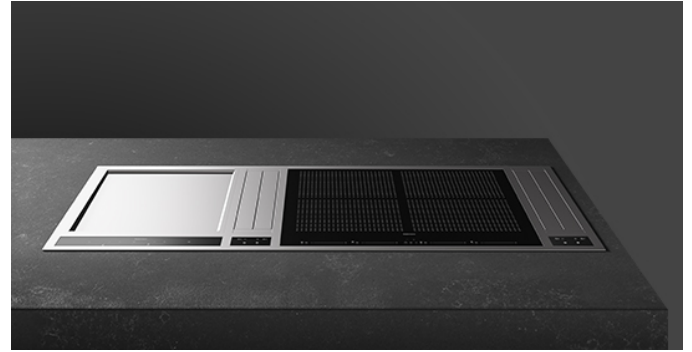

*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Residual heat indicators
Keep warm function: maximum temperature 70°
9 cooking levels + Power function (Over Boost)
Pot detector sensor
Automatic cut-off timer (for each cooking zone)
Timer / minute minder
Safety switch-off / safety lock function
Stainless steel AISI 304 frame
Schott black ceramic glass
Motorized flap system
Cooking areas with Flex Surface Technology
Bridge function

TECHNICAL FEATURES

Installation type
Worktop
Dimensions
114 cm cm
Type of control
Touch control


PACKAGING:WEIGHTS AND VOLUMES

Net weight
0.00 kg
Volume
0 m³
Packaging size
 Length
0 mm
 Height
0 mm
 Depth
0 mm



CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
10920 W
Voltage / Frequency
220-240V
50-60Hz
ENERGY CLASS
A

All versions: Side View



Modula/M3: Teppanyaki + 60 cm Induction Hob

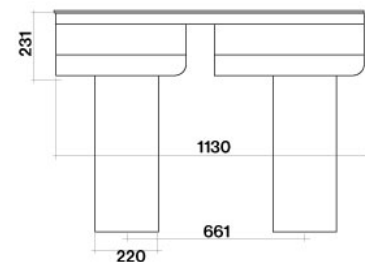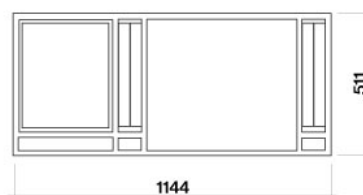

MODULA

Version

Modula/M3 Worktop - 114 cm


Collection

Integrated cooking systems

EAN code

8034122359618

ENERGY LABEL

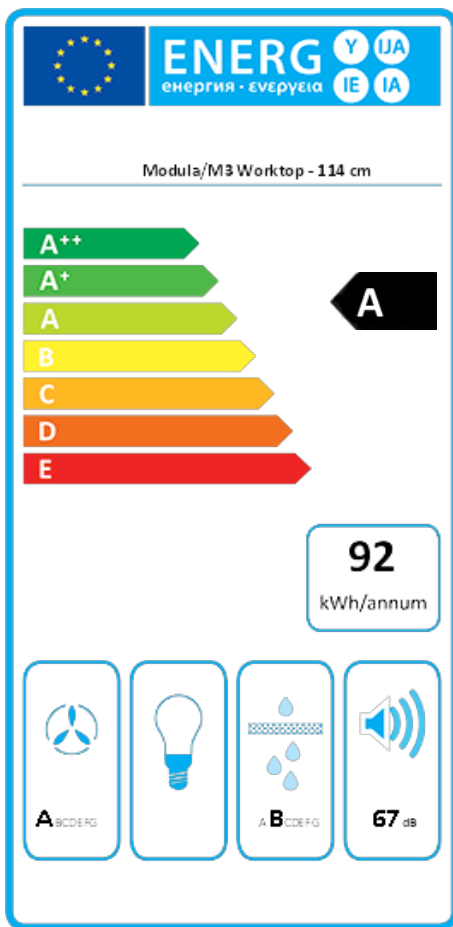

PF		
S	Falmec Spa	
M	Modula/M3 Worktop - 114 cm	
AEC	91,7	kWh/a
ECC	A	
FDE	30,5	
FDEC	A	
LE	0,0	
LEC		
GFE	87,0	
GFEC	B	
Qmin	340,0	m ³ /h
Qmax	760,0	m ³ /h
Qboost	840,0	m ³ /h
SPEmin	49	dBa
SPEmax	67	dBa
SPEboost	72	dBa
PO	-	W
PS	0,48	W
PI		
F	0,9	
EEl	54,3	
Qbep	519,0	m ³ /h
Pbep	591	Pa
Qboost	840,0	m ³ /h
Wbep	279,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	67	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.