

MODULA

Version

Modula/M1 Worktop - 84 cm

Collection

Integrated cooking systems

EAN code

8034122359335



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Residual heat indicators
Keep warm function: maximum temperature 70°
9 cooking levels + Power function (Over Boost)
Pot detector sensor
Automatic cut-off timer (for each cooking zone)
Timer / minute minder
Safety switch-off / safety lock function
Brushless Motor
Touch control with LED display
Carbon.Zeo/Metallic filter maintenance warning
Motorized flap system
Cooking areas with Flex Surface Technology
Bridge function

TECHNICAL FEATURES

Installation type
Worktop
Dimensions
84 cm cm
Finishing
Schott black ceramic glass
Motor
600 m³/h
Type of control
Touch control
Speed settings
9


PACKAGING:WEIGHTS AND VOLUMES

Gross weight
32.30 kg
Net weight
26.90 kg
Volume
0.24 m³
Packaging size
 Length
1055 mm
 Height
610 mm
 Depth
375 mm



CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
7160 W
Voltage / Frequency
220-240V
 50-60Hz
ENERGY CLASS
A+

All versions: side view



Modula/M1: 38 cm Induction Hob x 2

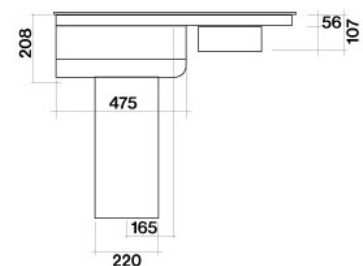

MODULA

Version

Modula/M1 Worktop - 84 cm


Collection

Integrated cooking systems

EAN code

8034122359335

ENERGY LABEL

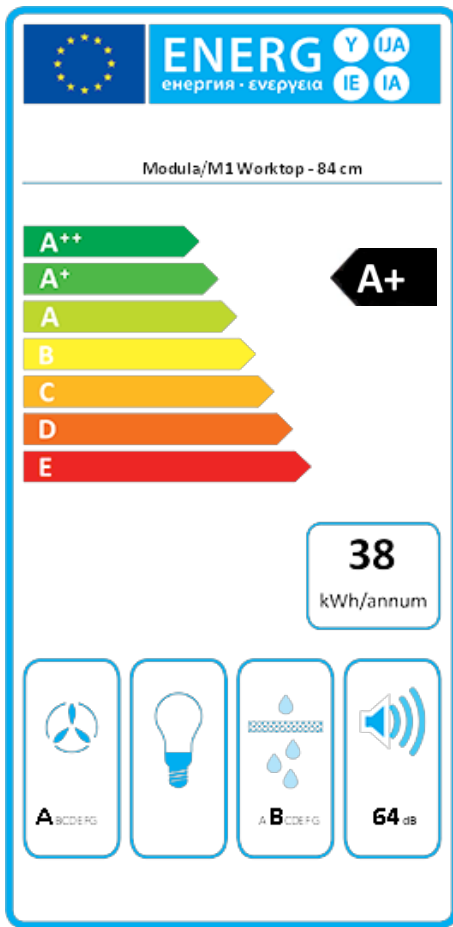

| PF | | |
|------------|---------------------------|-------------------|
| S | Falmec Spa | |
| M | Modula/M1 Worktop - 84 cm | |
| AEC | 38,3 | kWh/a |
| ECC | A+ | |
| FDE | 33,1 | |
| FDEC | A | |
| LE | 0,0 | |
| LEC | | |
| GFE | 87,0 | |
| GFEC | B | |
| Qmin | 170,0 | m ³ /h |
| Qmax | 380,0 | m ³ /h |
| Qboost | 440,0 | m ³ /h |
| SPEmin | 46 | dBa |
| SPEmax | 64 | dBa |
| SPEboost | 67 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 0,8 | |
| EEl | 43,8 | |
| Qbep | 267,0 | m ³ /h |
| Pbep | 584 | Pa |
| Qboost | 440,0 | m ³ /h |
| Wbep | 131,0 | W |
| WL | 0,00 | W |
| Emiddle | 0 | lux |
| Lwa-SPEmax | 64 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.