

## MODULA

### Version

Modula/M2 Worktop - 84 cm

### Collection

Integrated cooking systems

### EAN code

8034122359625



The photograph is purely for information  
It may not correspond to the selected version.

## FEATURES

**Residual heat indicators**  
**Keep warm function: maximum temperature 70°**  
**9 cooking levels + Double Booster**  
**9 cooking levels + Power function (Over Boost)**  
**Pot detector sensor**  
**Automatic cut-off timer (for each cooking zone)**  
**Timer / minute minder**  
**Safety switch-off / safety lock function**  
**Brushless Motor**  
**Touch control with LED display**  
**Carbon.Zeo/Metallic filter maintenance warning**  
**Motorized flap system**  
**Cooking areas with Flex Surface Technology**  
**Bridge function**

## TECHNICAL FEATURES

**Installation type**  
Worktop  
**Dimensions**  
84 cm cm  
**Finishing**  
Schott black ceramic glass  
**Motor**  
600 m<sup>3</sup>/h  
**Type of control**  
Touch control


## PACKAGING:WEIGHTS AND VOLUMES

**Gross weight**  
43.20 kg  
**Net weight**  
37.80 kg  
**Volume**  
0.24 m<sup>3</sup>  
**Packaging size**  
 Length  
1055 mm  
 Height  
610 mm  
 Depth  
375 mm



## CONSUMPTION AND CONNECTION FEATURES

**Maximum consumption**  
6860 W  
**Voltage / Frequency**  
220-240V  
 50-60Hz  
**ENERGY CLASS**  
A+

All versions: Side View



Modula/M2: Teppanyaki + 38 cm Induction Hob

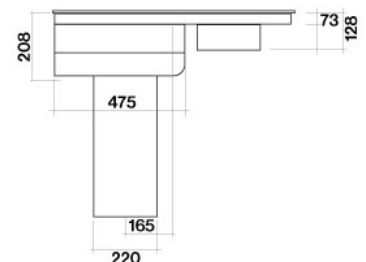

## MODULA

### Version

Modula/M2 Worktop - 84 cm


### Collection

Integrated cooking systems

### EAN code

8034122359625

## ENERGY LABEL

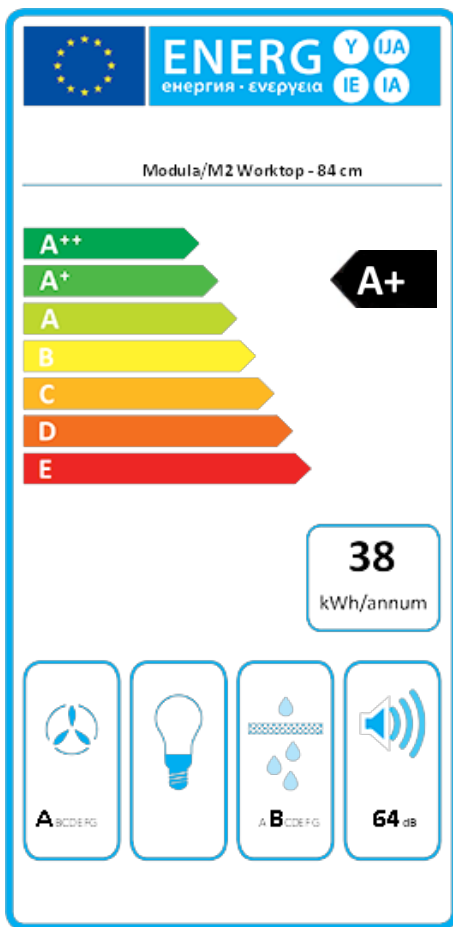

PF		
S	Falmec Spa	
M	Modula/M2 Worktop - 84 cm	
AEC	38,3	kWh/a
ECC	A+	
FDE	33,1	
FDEC	A	
LE	0,0	
LEC	0	
GFE	87,0	
GFEC	B	
Qmin	170,0	m³/h
Qmax	380,0	m³/h
Qboost	440,0	m³/h
SPEmin	46	dBa
SPEmax	64	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	0,8	
EEl	43,8	
Qbep	267,0	m³/h
Pbep	584	Pa
Qboost	440,0	m³/h
Wbep	131,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	64	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.